



UiO : **Faculty of Mathematics and Natural Sciences**

University of Oslo



Department of Informatics

Networks and Distributed Systems (ND) group

INF 3190

Wireless Communications



Özgü Alay

ozgu@simula.no

Simula Research Laboratory

Outline

- Brief history of wireless
- What is wireless communication?
- Bottom-down approach
 - Physical layer : how can we transmit signals in air?
 - Link layer : multiple access
 - Wireless impact higher layers?
- Wireless Systems
 - Wifi
 - Mobile Broadband Networks

Wireless History

- James C Maxwell (1831- 1879) laying the theoretical foundation for EM fields with his famous equations
- Heinrich Hertz (1857- 1894) was the first to demonstrate the wave character of electrical transmission through space (**1886**). (Note Today the unit Hz reminds us of this discovery).
- Radio invented in the **1880s** by Marconi
- The 1st radio broadcast took place in **1906** when Reginald A Fessenden transmitted voice and music for Christmas.

Wireless History cont...

- In **1915** , the first wireless voice transmission was set up between New York and San Francisco
- In **1926**, the first telephone in a train was available on the Berlin – Hamburg line
- **1928** was the year of many field trials for TV broadcasting. John L Baird (1888 – 1946) transmitted TV across Atlantic and demonstrated color TV

Wireless History cont ...

- 1946, Public Mobile in 25 US cities, high power transmitter on large tower. Covers distance of 50 Km. Push to talk.
- 1982: ***Groupe Spéciale Mobile*** was launched to develop standards for pan-European mobile network
- GSM now stands for ***Global System for Mobile Communications***
- 1992 Official commercial launch of GSM in Europe

Wireless History cont ...

- 1997 - Wireless LANs
- 2000 - Bluetooth with 1Mbit/s specification, single cell. Later work on 10Mbit/s spec with multi cell capability
- In 2005 mobile phone subscribers exceed fixed phone subscriber.
- In 2012 the number of subscriber reaches 1 million.
- In 2014, the number of mobile devices grow to a total of 7.4 billion, exceeding the world's population.
- 2017: 5G, convergence of technologies to support billions of connected devices.

Outline

- Brief history of wireless
- What is wireless communication?
- Bottom-down approach
 - Physical layer : how can we transmit signals in air?
 - Link layer : multiple access
 - Wireless impact higher layers?
- Wireless Systems
 - Mobile Broadband Networks
 - Wifi

Why Wireless?

- Freedom from wires
 - No cost of installing the wires
 - Not deal with bunches of wires running around
- Global coverage
 - where wired communication is not feasible or costly
e.g. rural areas, battle field and outer space.
- Stay Connected
 - Any where any time, even under mobility
- Flexibility
 - Connect to multiple devices simultaneously

What is Wireless Communication?

- Transmitting voice and data using electromagnetic waves in open space
- Electromagnetic waves
 - Travel at speed of light ($c = 3 \times 10^8$ m/s)
 - Has a frequency (f) and wavelength (λ)
 - » $c = f \times \lambda$


Wireless Link Characteristics

- *decreased signal strength*: radio signal attenuates (lose signal strength) as it propagates through matter (path loss)
 - Higher frequencies will attenuate FASTER
 - Higher frequencies also don't penetrate objects as well
- *interference from other sources*: standardized wireless frequencies shared by other devices (e.g., phone); devices (motors) interfere as well
- *multipath propagation*: radio signal reflects off objects/ground, reaching destination at slightly different times


.... make communication across (even a point to point) wireless link much more “difficult”


Electromagnetic Spectrum

3MHz ==100m
300MHz ==1m
30GHz ==1cm

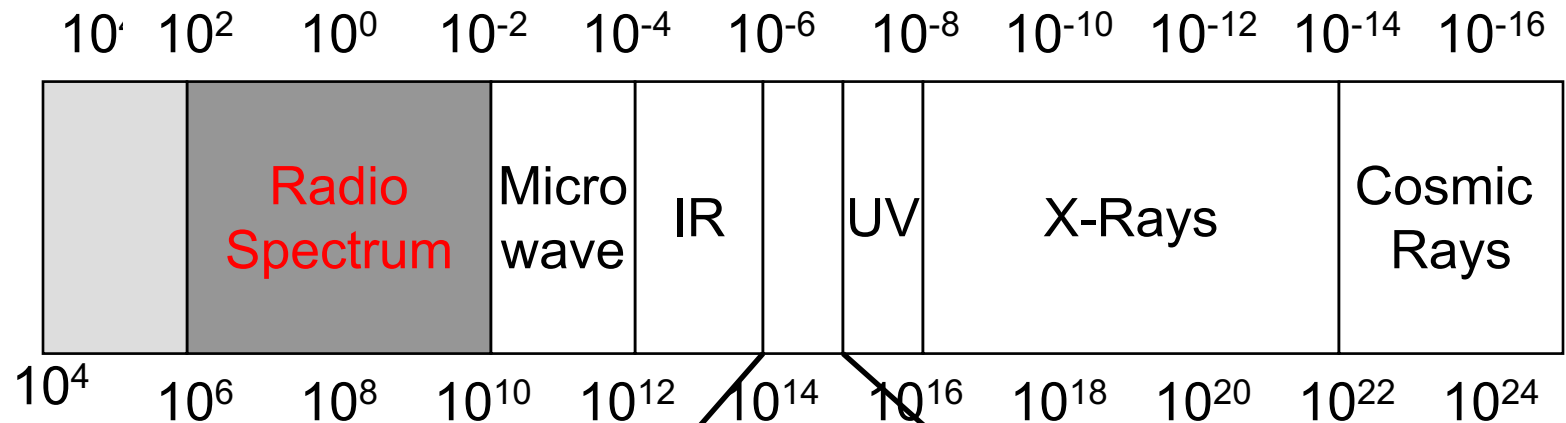

< 30 KHz	VLF
30-300KHz	LF
300KHz – 3MHz	MF
3 MHz – 30MHz	HF
30MHz – 300MHz	VHF
300 MHz – 3GHz	UHF
3-30GHz	SHF
> 30 GHz	EHF



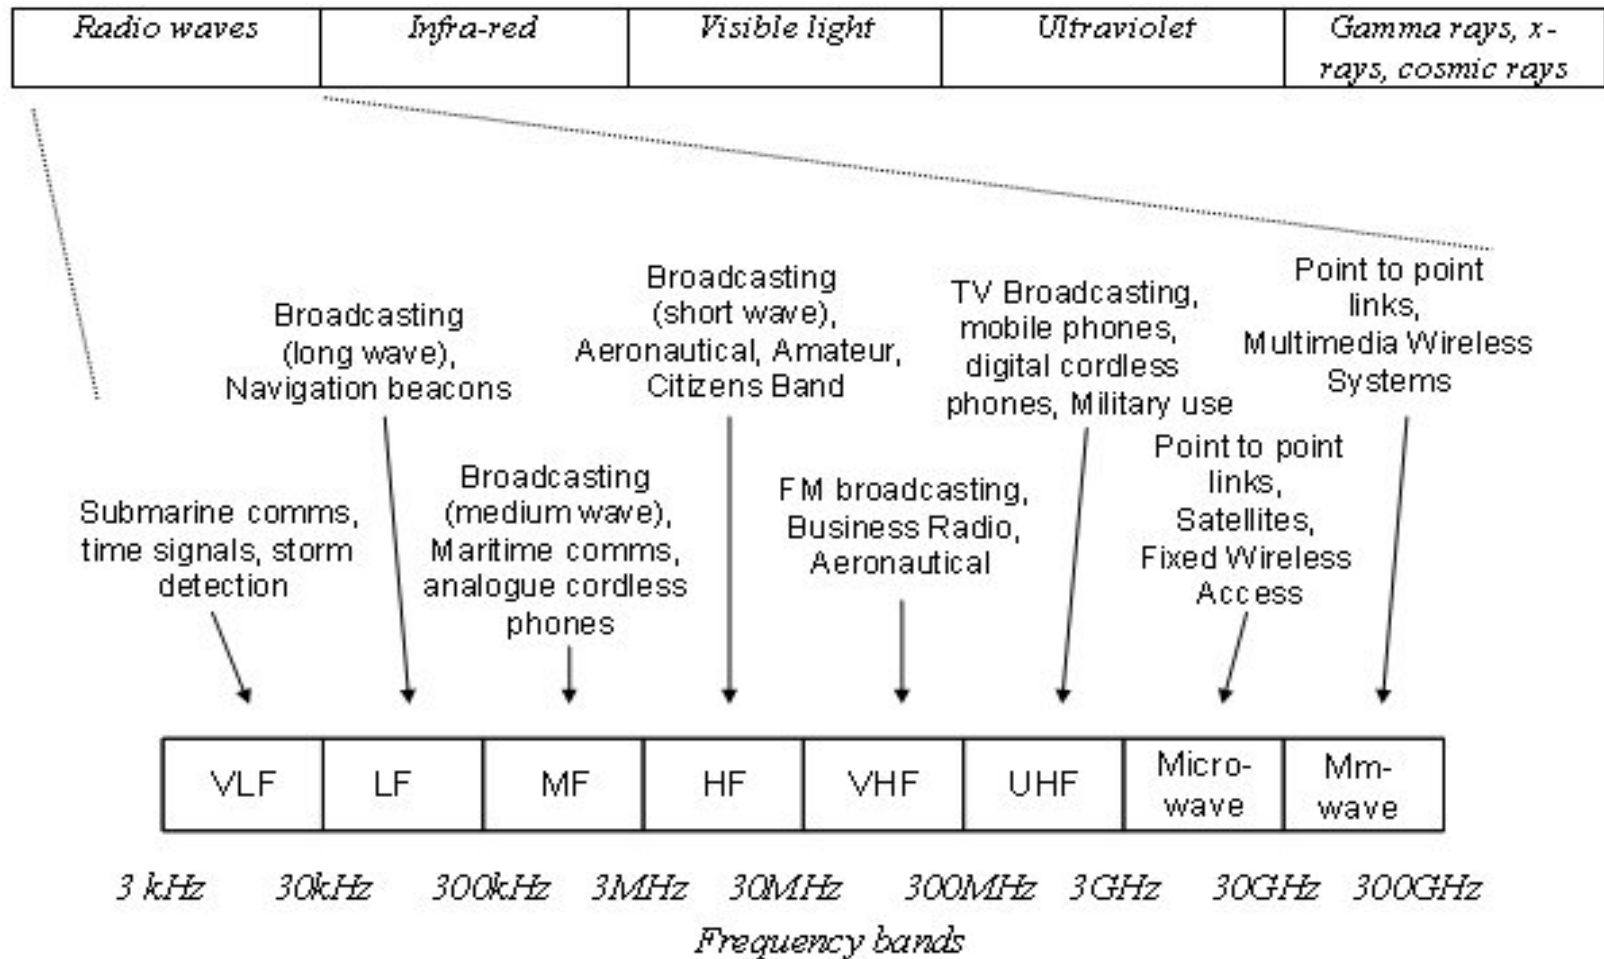


Outline

- Brief history of wireless
- What is wireless communication?
- **Bottom-down approach**
 - Physical layer : how can we transmit signals in air?
 - Link layer : multiple access
 - Wireless impact higher layers?
- **Wireless Systems**
 - Mobile Broadband Networks
 - Wifi


Block diagram of radio transmission

- Information (e.g. sound) is converted by a transducer (e.g. a microphone) to an electrical signal
- This signal is used to modulate a radio wave sent from a transmitter.
- A receiver intercepts the radio wave and extracts the information-bearing electronic signal, which is converted back using another transducer such as a speaker.

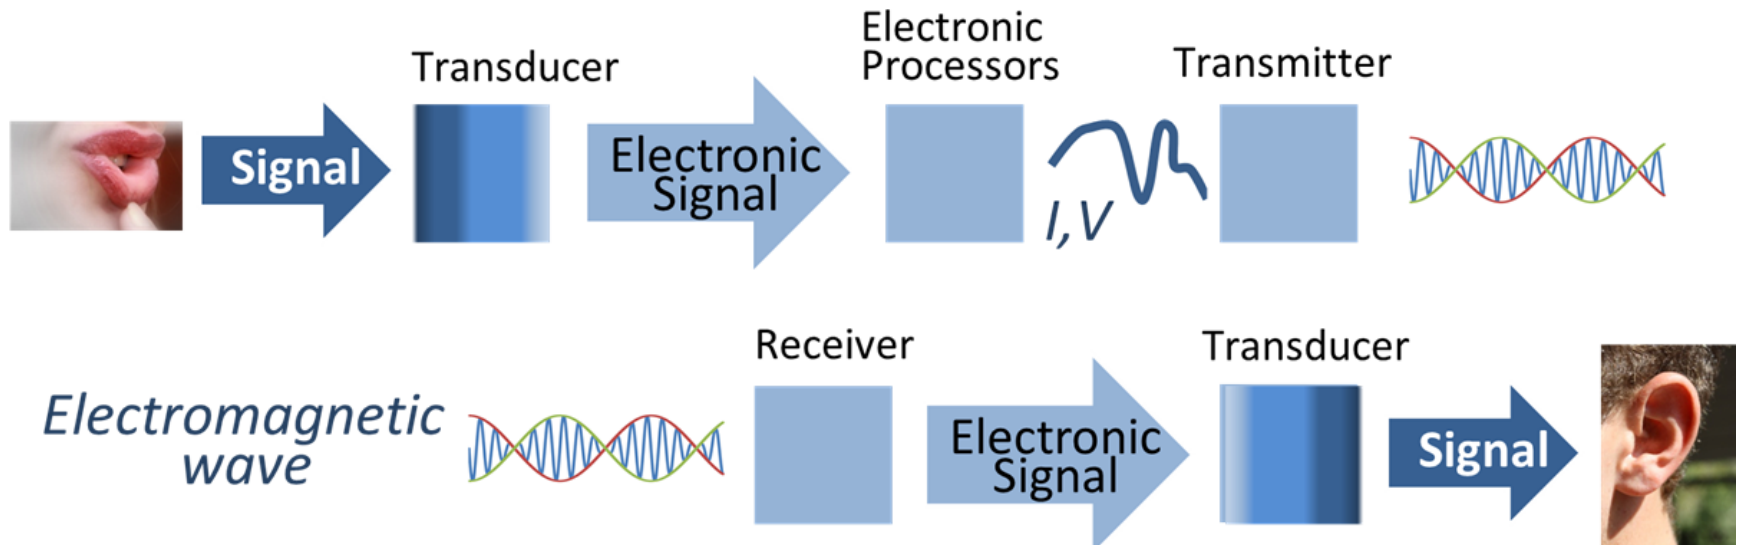

What is modulation?

- Modulation = Adding information to a carrier signal
- The sine wave on which the characteristics of the information signal are modulated is called a carrier signal

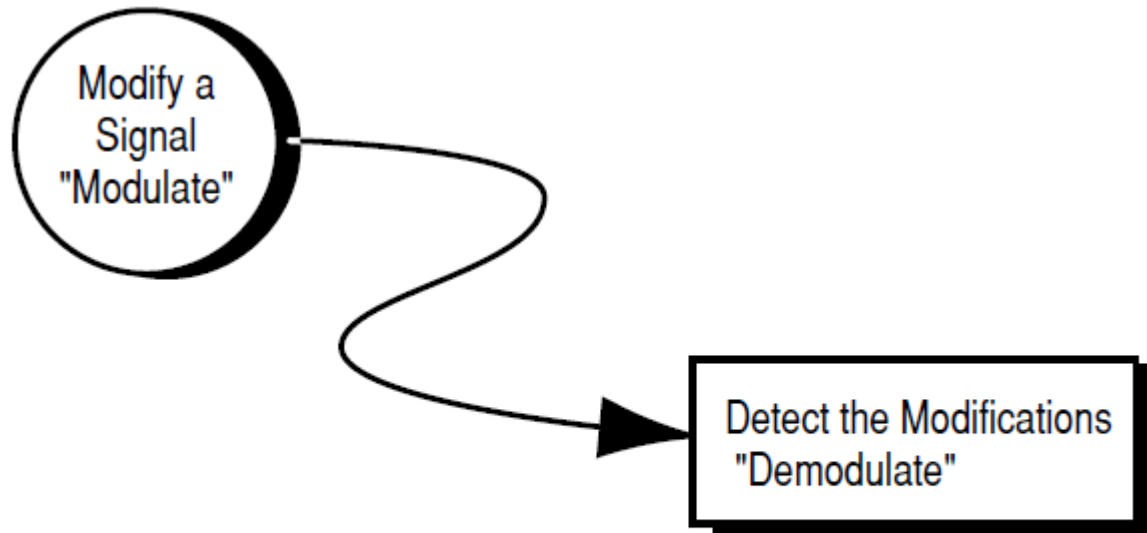


Any reliably detectable change in
signal characteristics can carry information

Preliminaries

Carrier signal:

$$\bullet A \cos (2\pi f_c t + \varphi)$$


Amplitude Frequency Phase

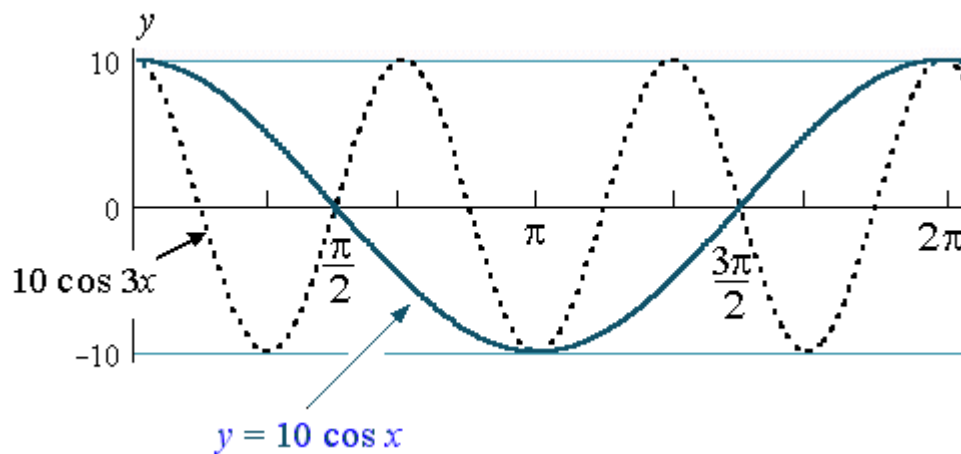

Types of Modulation

- ANALOG MODULATION: If the variation in the parameter of the carrier is continuous in accordance to the input analog signal the modulation technique is termed as analog modulation scheme
- DIGITAL MODULATION: If the variation in the parameter of the carrier is discrete then it is termed as digital modulation technique

ANALOG MODULATION

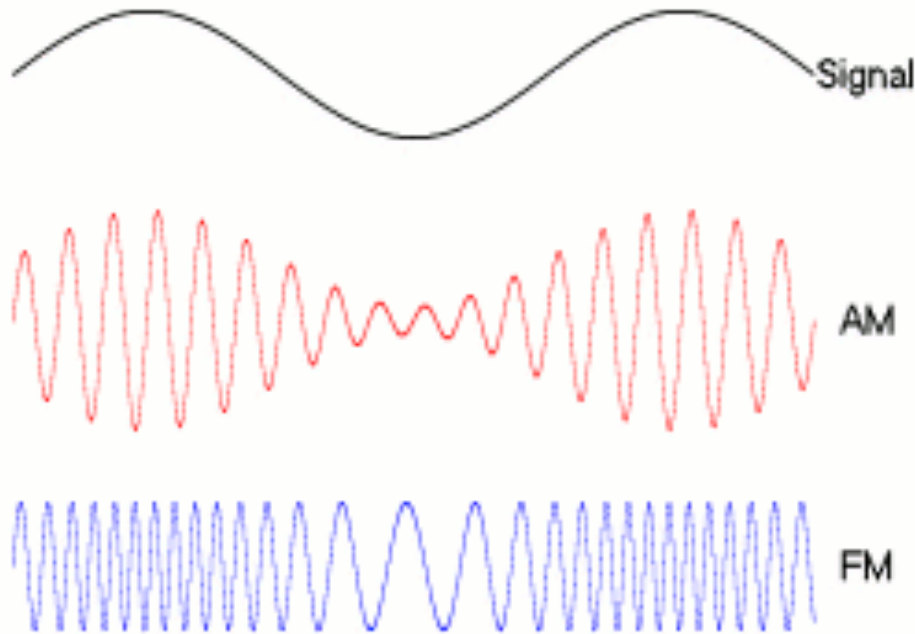

Amplitude Modulation:
Signal shapes the
amplitude of the carrier

Frequency Modulation:
Signal shapes the
frequency of the carrier

DIGITAL MODULATION TECHNIQUES

1. **Baseband digital message signal:** $m(t)$

2. **Analog sinusoidal carrier signal:**

A. Carrier signal: $A_c \cos(2\pi f_c t + \phi_c)$

3. **ASK: Amplitude Shift Keying.**


A. Message signal changes the carrier's **amplitude** : $A_i(t)$.

4. **FSK: Frequency Shift Keying.**

A. Message signal changes the carrier's **frequency** : $f_i(t)$.

5. **PSK: Phase Shift Keying.**

A. Message signal changes the carrier's **phase** : $\phi_i(t)$.

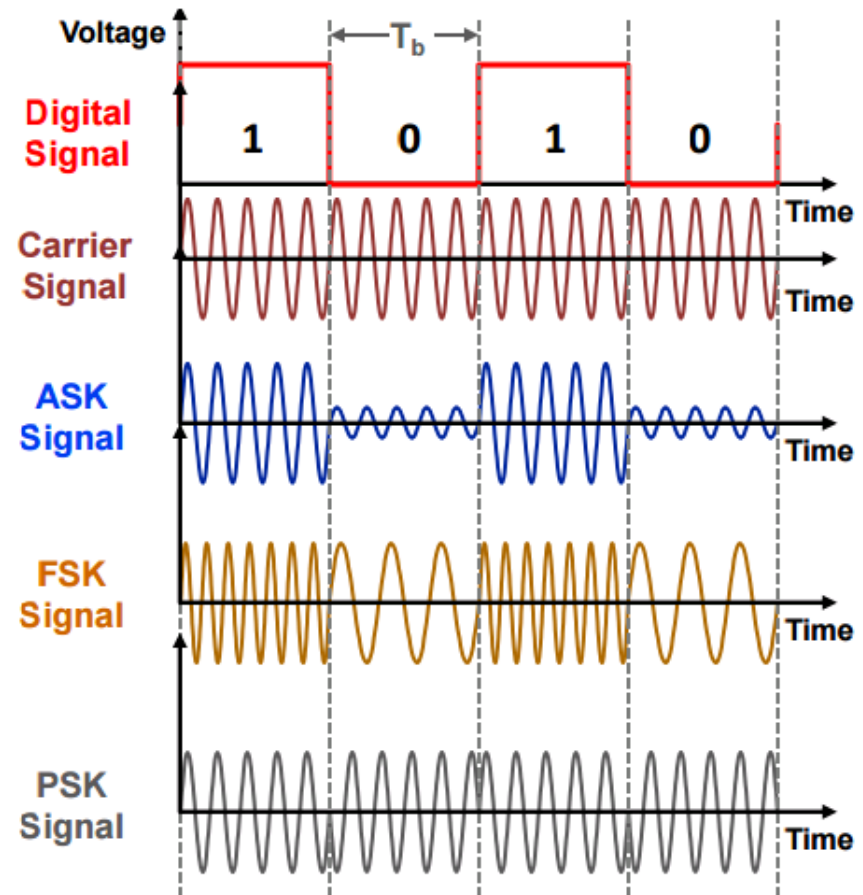


Outline


- Brief history of wireless
- What is wireless communication?
- Bottom-down approach
 - Physical layer : how can we transmit signals in air?
 - **Link layer : multiple access**
 - Wireless impact higher layers?
- Wireless Systems
 - Mobile Broadband Networks
 - Wifi

Multiplexing (MUX) / Multiple Access (MA)

- Transmission of several data flows (logical connections) over one medium
 - Realize individual “connections”, *normally* with deterministic properties (throughput, delay)
 - Terminology: MUX (“.. Multiplexing”) or MA (“.. Multiple Access”)
- Also:
Transmission of one data flow (logical connection) over several media
 - (increase performance and/or reliability)

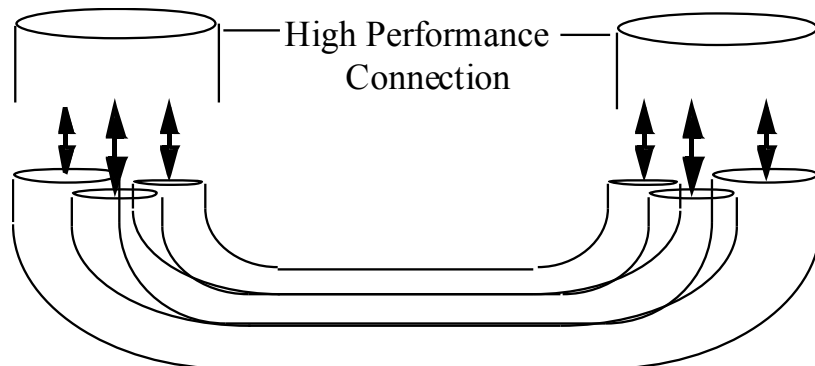


several connections with less performance / quality

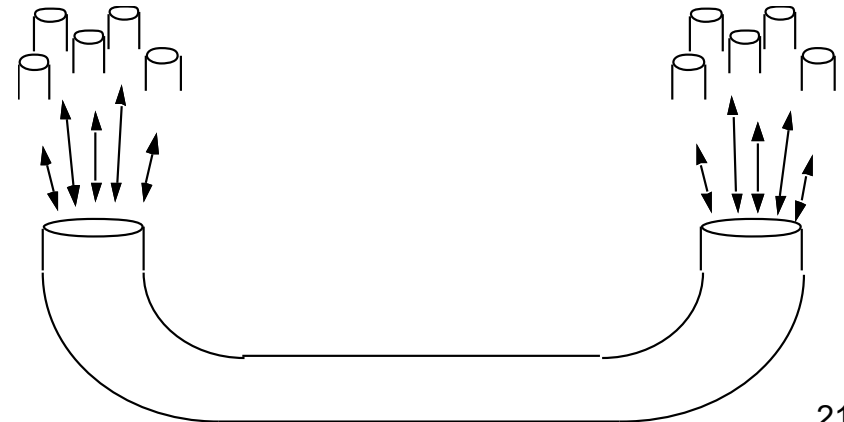


Time Division Multiple Access (TDMA)

- Each user is allowed to transmit only within specified time intervals (Time Slots). Different users transmit in different Time Slots.
- When users transmit, they occupy the whole frequency bandwidth (separation among users is performed in the time domain).
- Commonly used in GSM together with frequency hopping

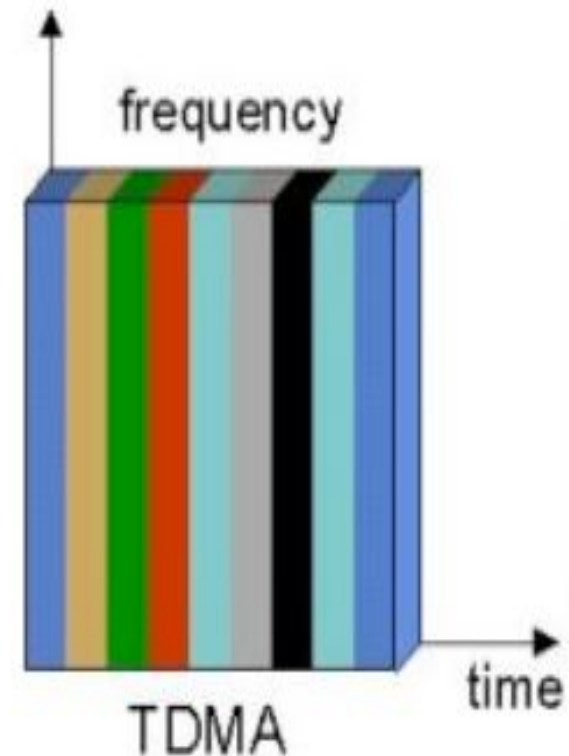


Frequency Division Multiple Access (FDMA)

- Each user transmits with no limitations in time, but using only a portion of the whole available frequency bandwidth
- Different users are separated in the frequency domain
- FDMA can be used for both digital and analog signals
- Very common in satellite communications

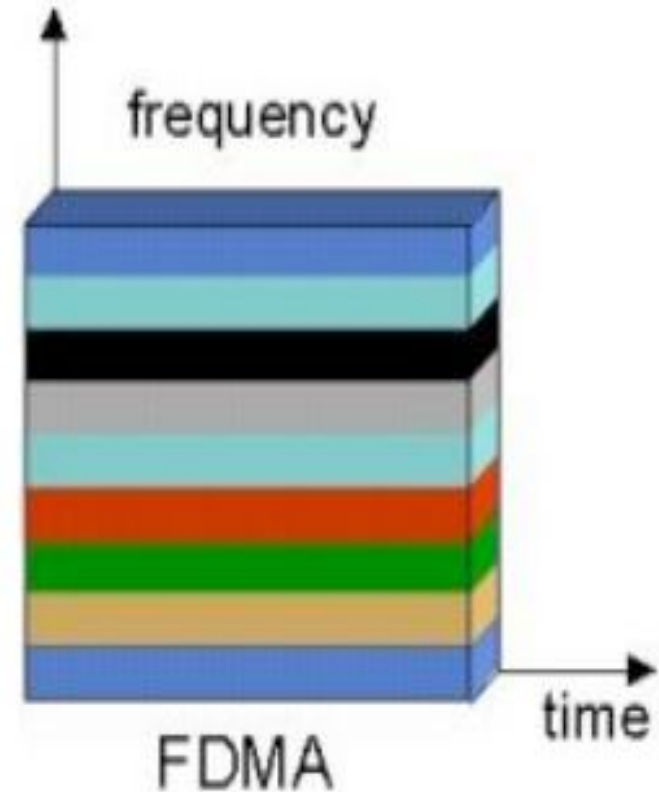

❑ The major disadvantage of FDMA is the relatively expensive and complicated bandpass filters required.


FDMA in time domain

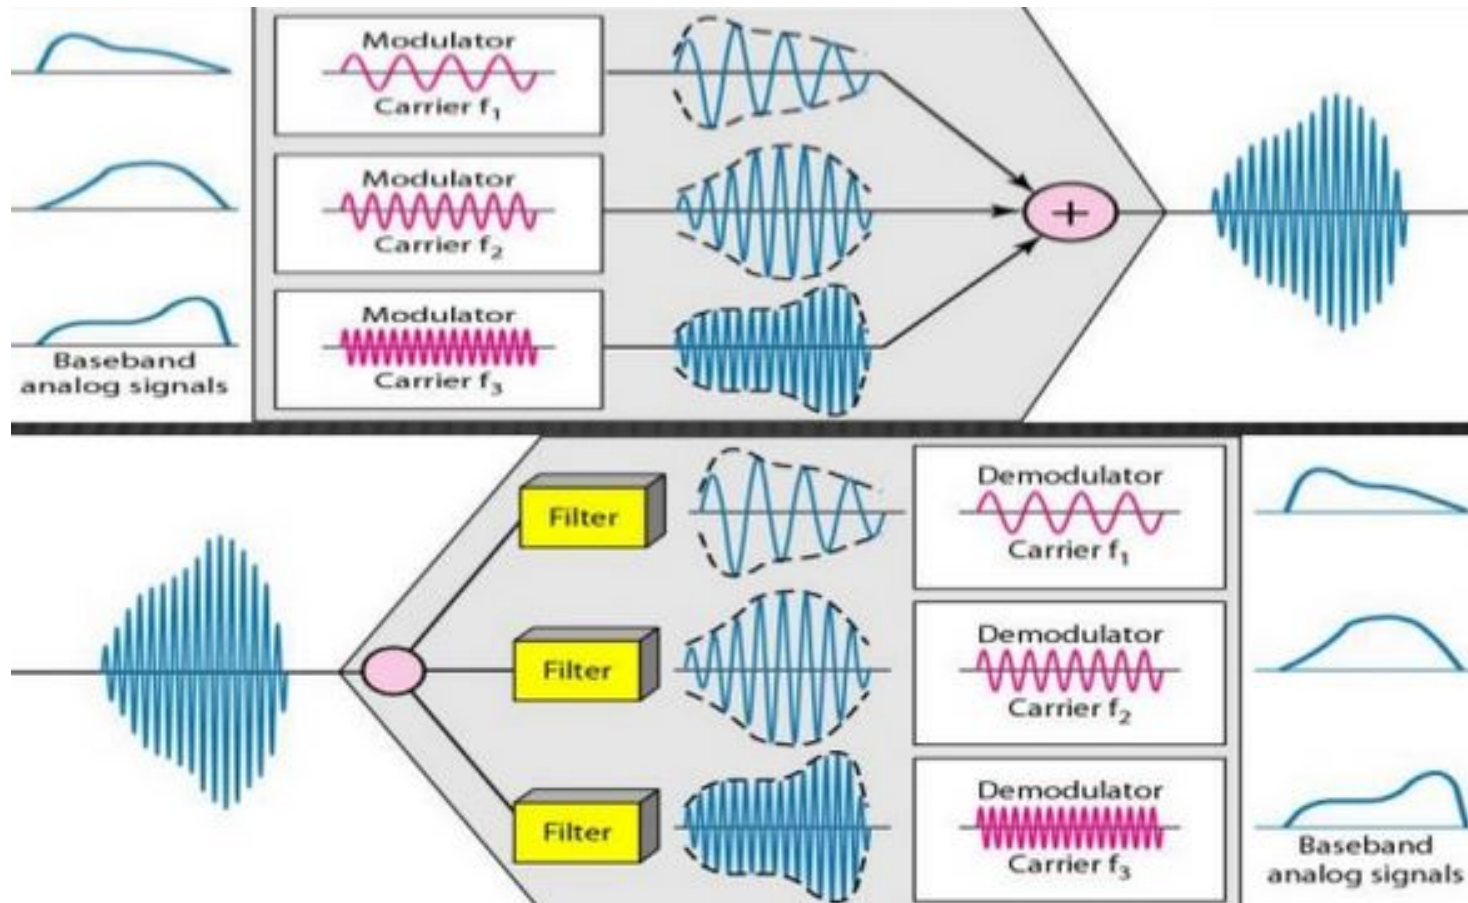


Code Division Multiple Access (CDMA)

- unique “code” assigned to each user; i.e., code set partitioning
 - all users share same frequency, but each user has own “chipping” sequence (i.e., code) to encode data
 - allows multiple users to “coexist” and transmit simultaneously with minimal interference
- **Chip sequences** are orthogonal to ensure reconstructability:
 - seq. 1: $x = (x_1, \dots, x_n)$, seq. 2: $y = (y_1, \dots, y_n)$ $\sum x_i y_i = 0$
 - Common choice: Walsh sequence
- **encoded signal** = (original data) X (chipping sequence)
- **decoding**: inner-product of encoded signal and chipping sequence

CDMA encode/decode

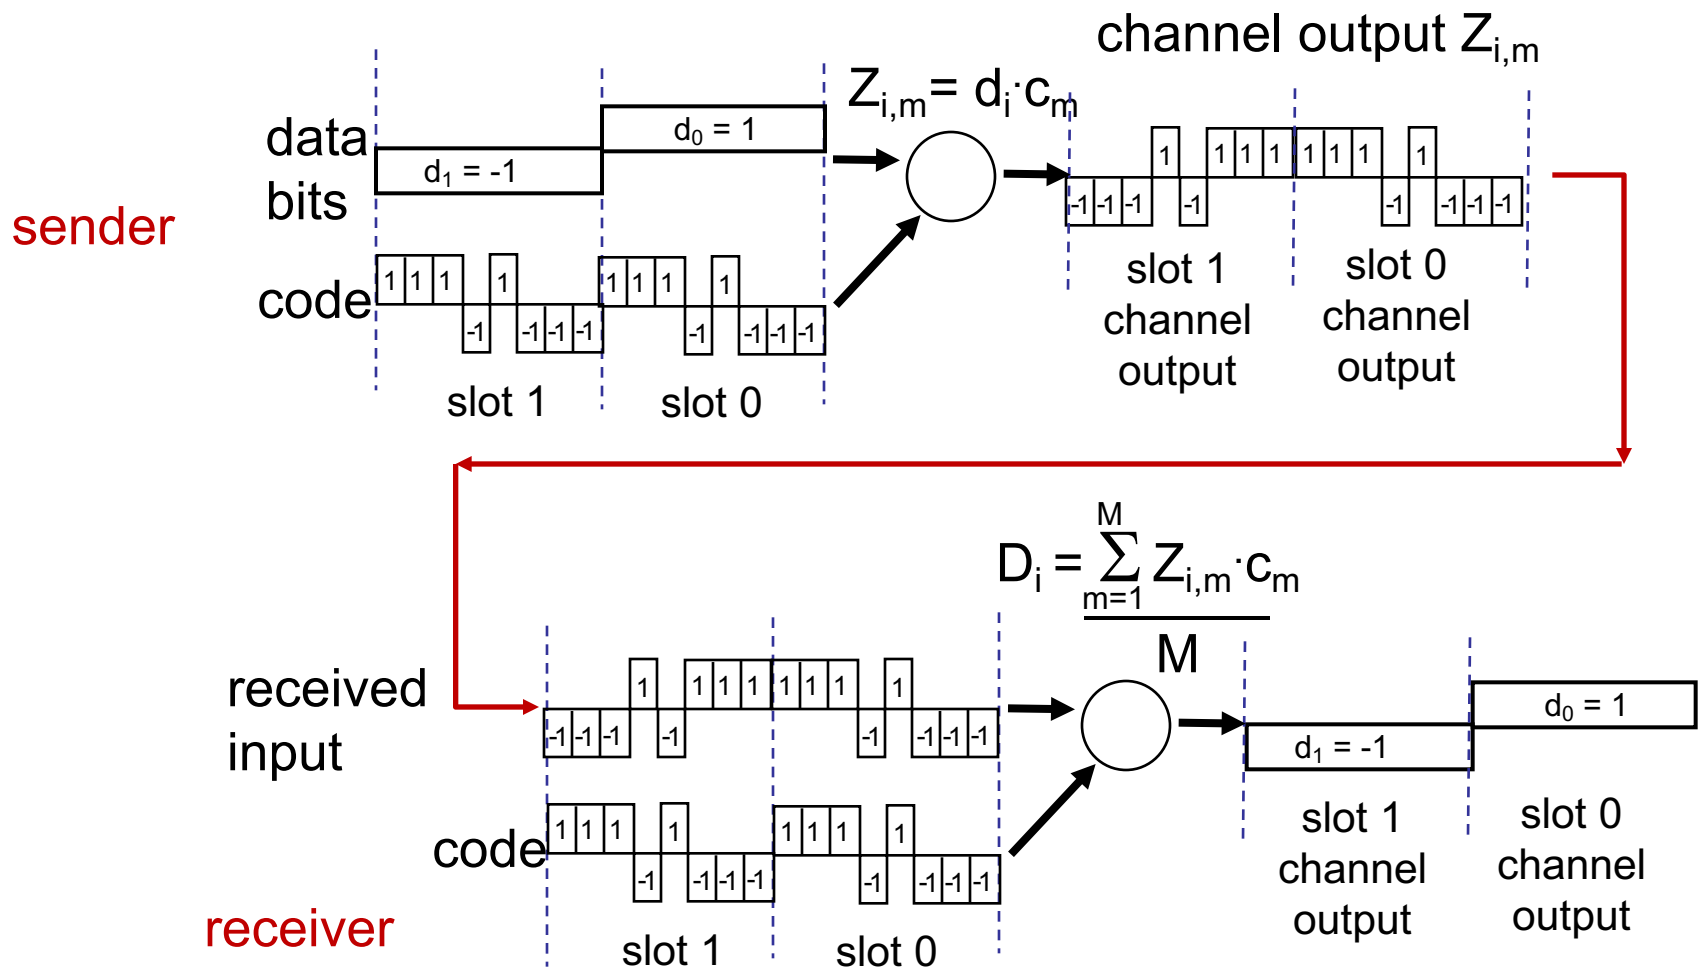


CDMA: two-sender interference

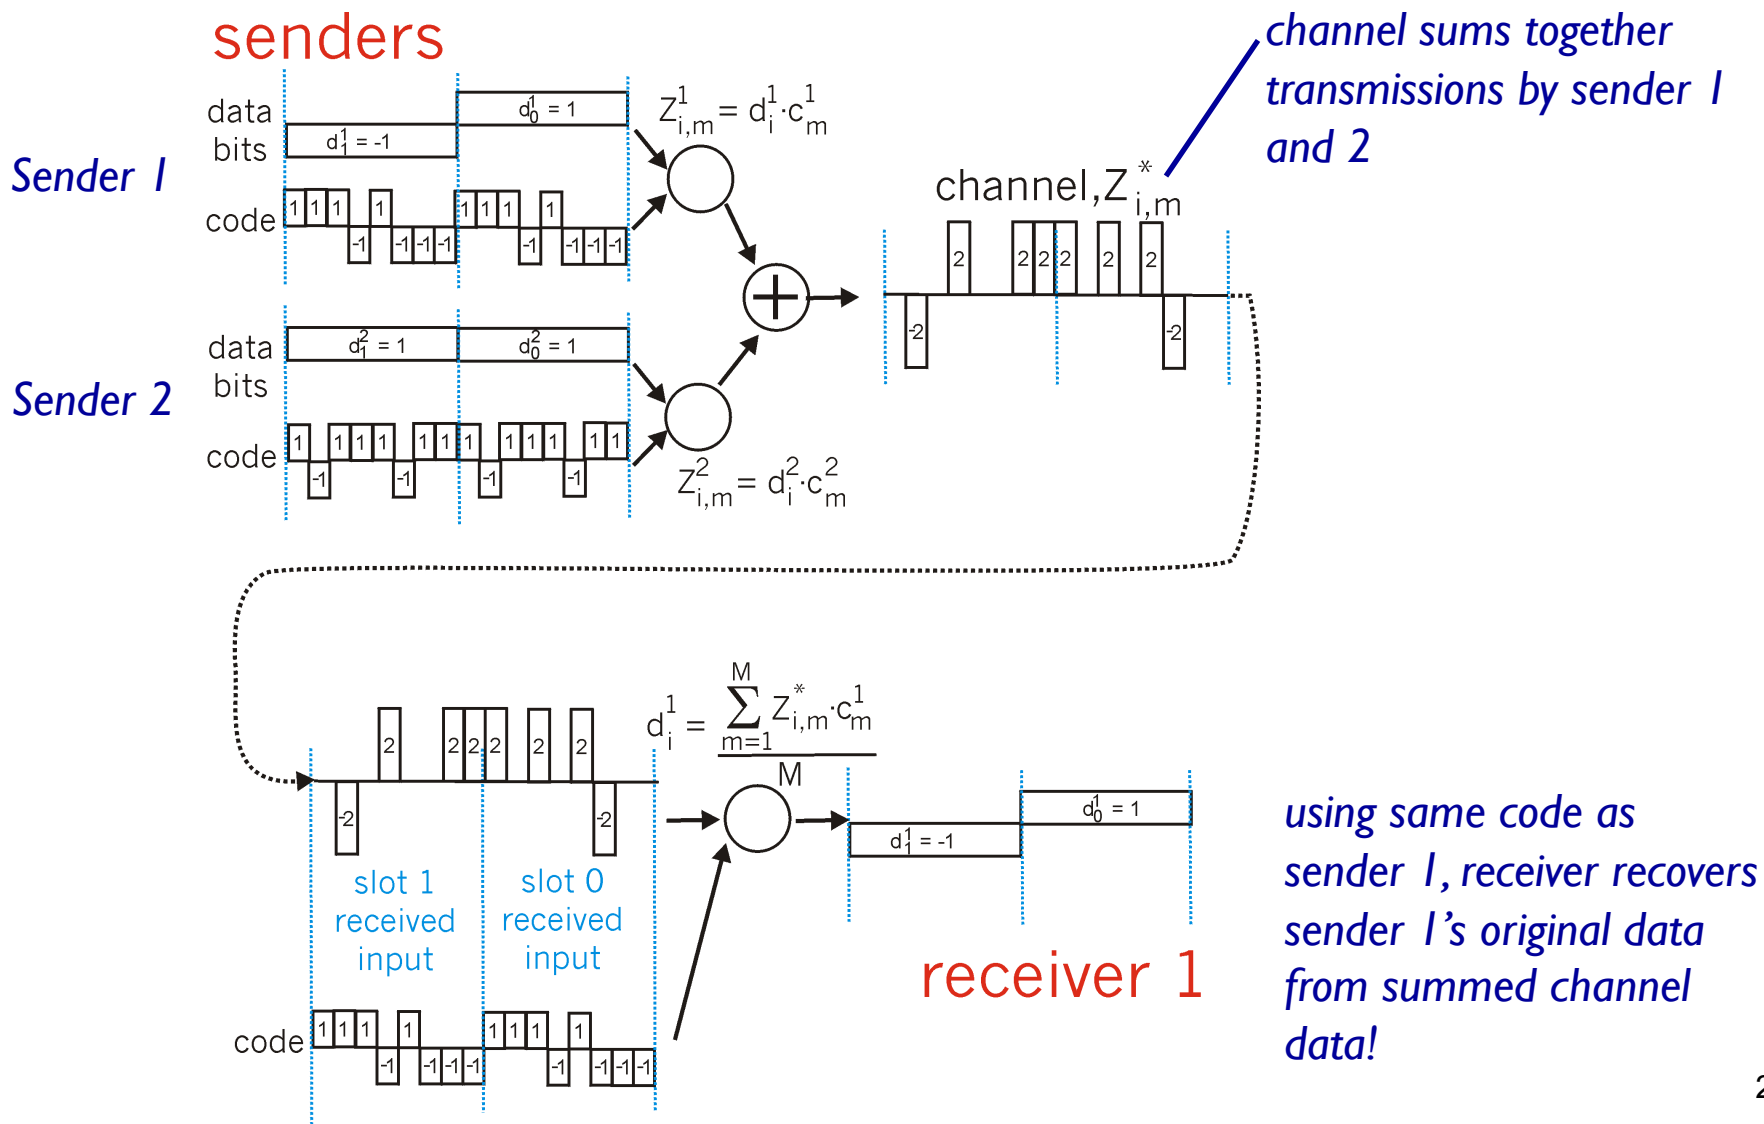


Orthogonal Frequency Division Multiple Access (OFDMA)

- The carriers are chosen such that they are orthogonal to one another

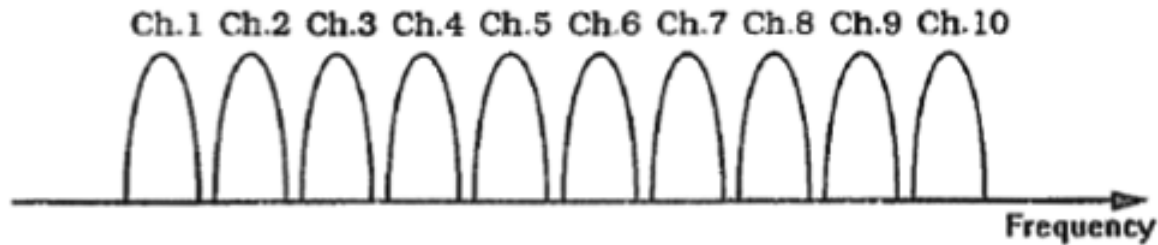

Conventional multicarrier

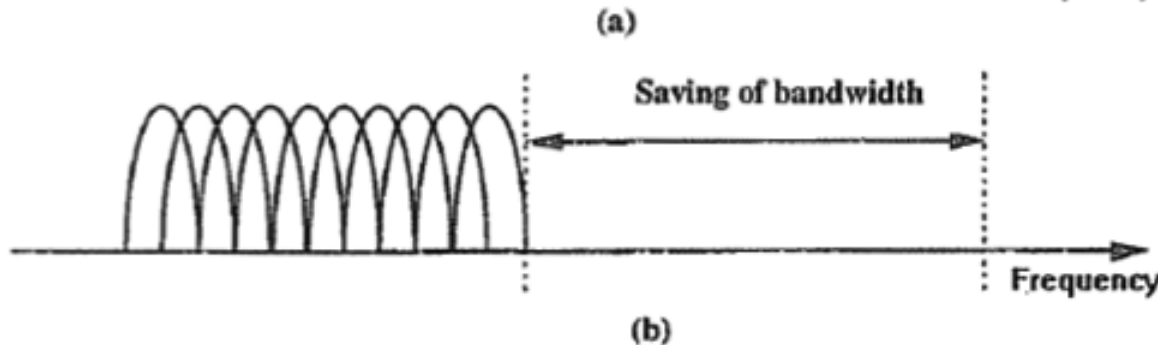

Orthogonal multicarrier

Orthogonality Principle

- Real Function space

$$f_1(t) = A \sin(\omega t)$$


$$f_2(t) = B \cos(\omega t)$$

$$\int_{\tau}^{\tau+T} f_1(t)f_2(t)dt = 0$$

$$f_m(t) = M \sin(m\omega t)$$

$$f_n(t) = N \cos(n\omega t)$$


$$\int_{\tau}^{\tau+T} f_m(t)f_n(t)dt = 0$$

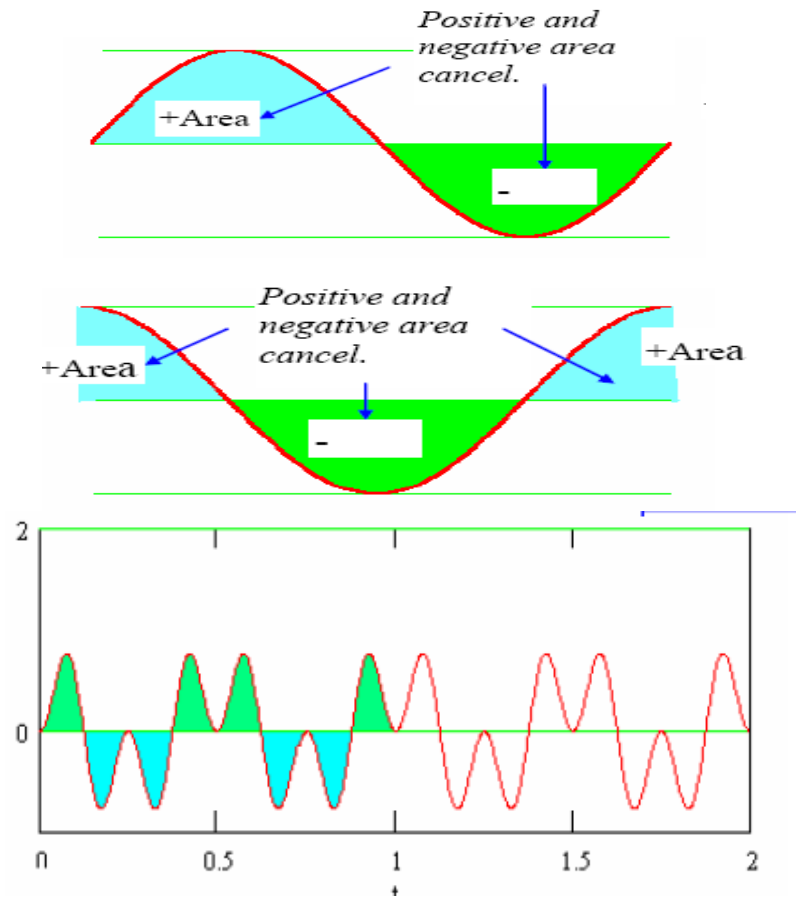


Here $m\omega$ and $n\omega$ are called **m -th** and **n -th** harmonics of **ω** respectively

Summary: FDMA, TDMA, CDMA and OFDMA


1G/TACS

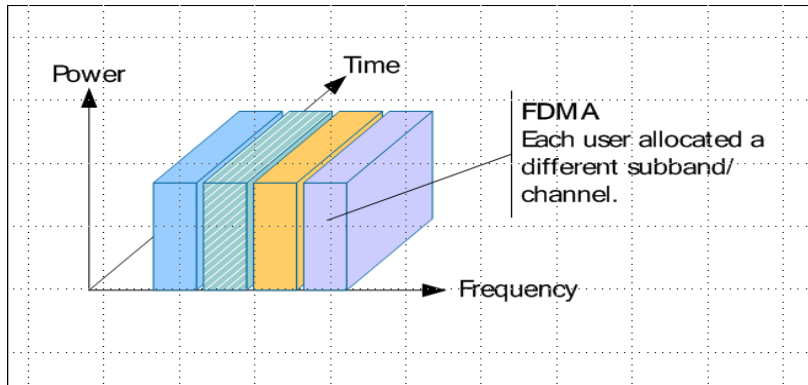


2G/GSM

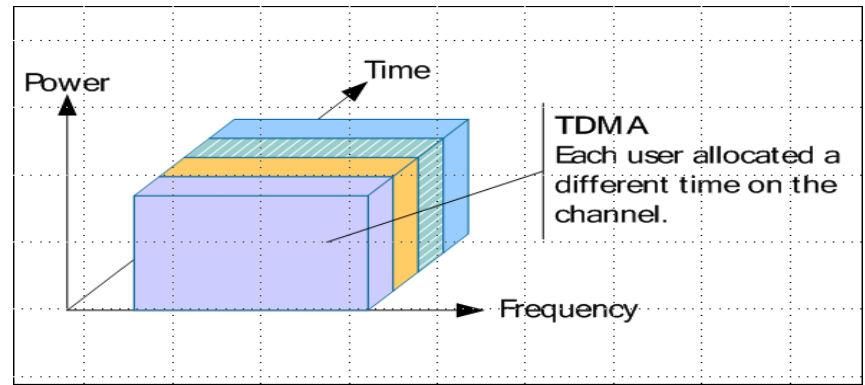

3G

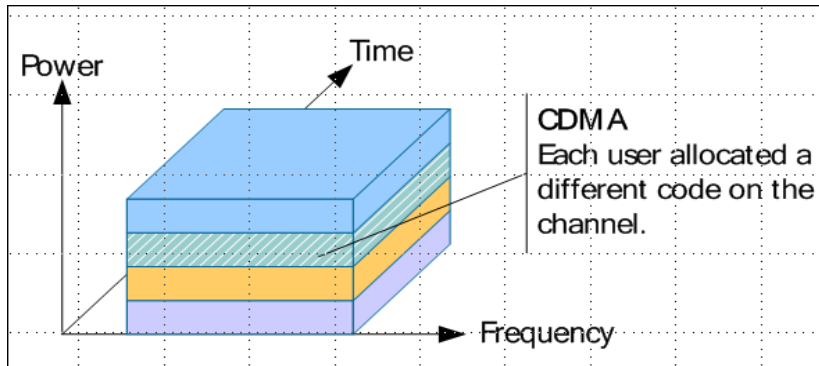

4G/LTE and Wimax

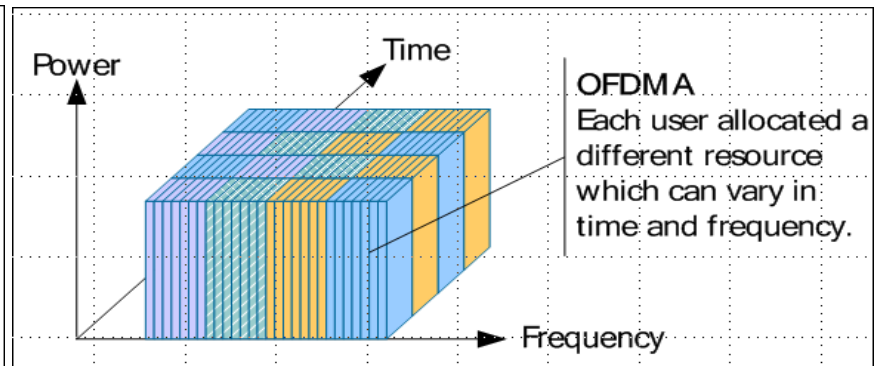

Outline

- Brief history of wireless
- What is wireless communication?
- Bottom-down approach
 - Physical layer : how can we transmit signals in air?
 - Link layer : multiple access
 - **Wireless impact higher layers?**
- Wireless Systems
 - Mobile Broadband Networks
 - Wifi

Wireless: impact on higher layers

- logically, impact *should* be minimal ...
 - best effort service model remains unchanged
 - TCP and UDP can (and do) run over wireless, mobile
- ... but performance-wise:
 - packet loss/delay due to bit-errors (discarded packets, delays for link-layer retransmissions), and handoff
 - TCP interprets loss as congestion, will decrease congestion window un-necessarily
 - delay impairments for real-time traffic
 - limited bandwidth of wireless links

Outline

- Brief history of wireless
- What is wireless communication?
- Bottom-down approach
 - Physical layer : how can we transmit signals in air?
 - Link layer : multiple access
 - Wireless impact higher layers?
- **Wireless Systems**
 - **Mobile Broadband Networks**
 - Wifi


Mobile Broadband (MBB) Networks

- Mobile networks (e.g. 3G/4G)
 - Underpins a lot of vital operations of the modern society
 - Extended coverage
 - Mobility
 - Security




Macro View

- Building Blocks of MBB Networks
 - Radio Access Network
 - Core Network

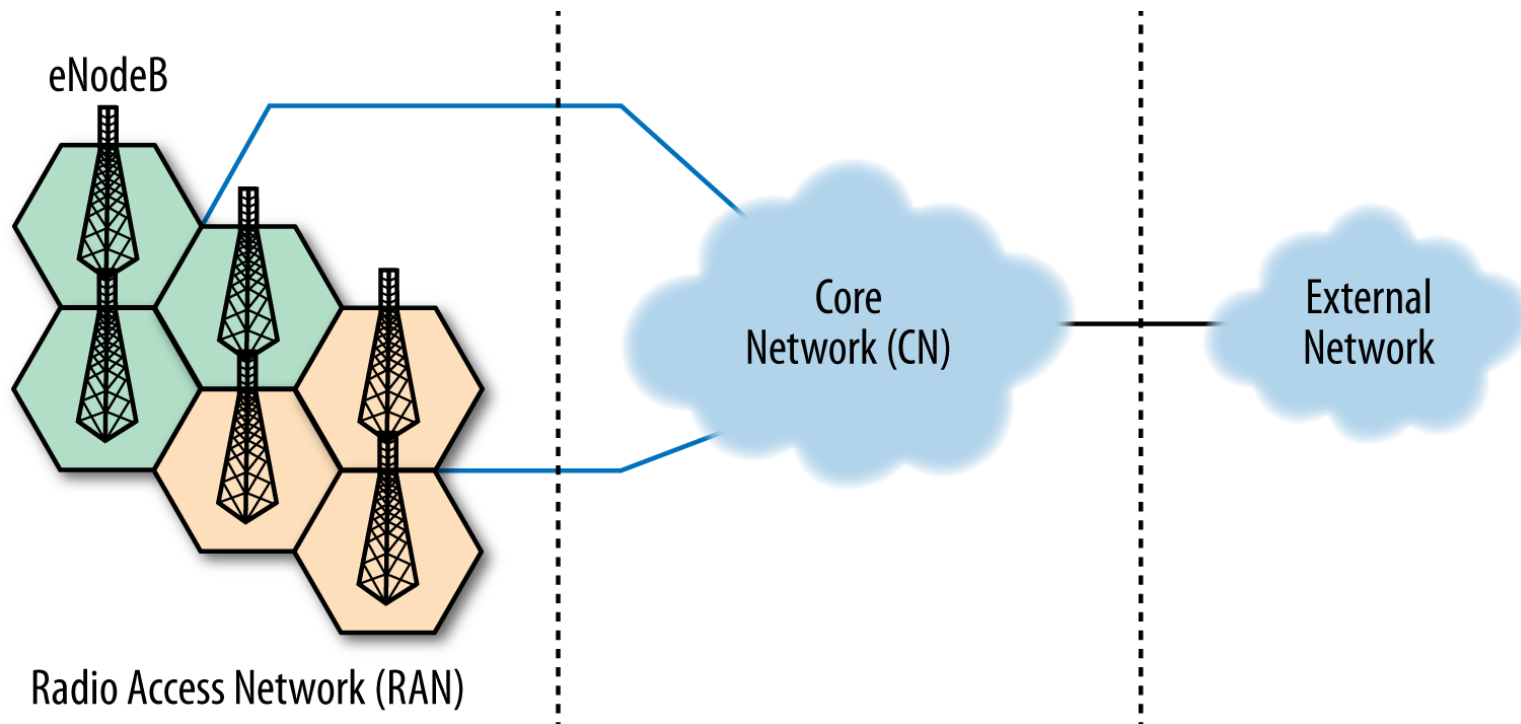

Closer look to LTE

LTE/EPC Network Elements

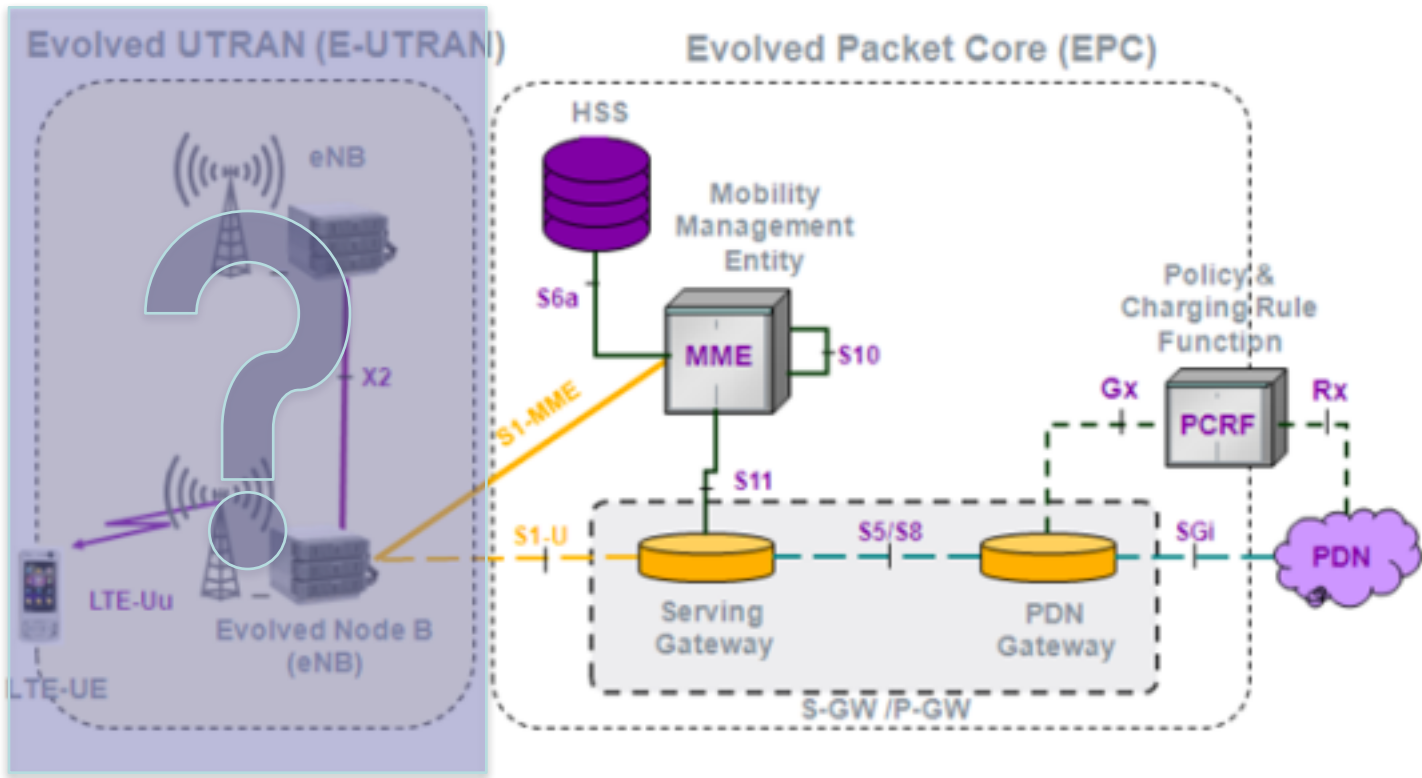

UTRAN: UMTS Terrestrial Radio Access Network

eNodeB is responsible for:


- User and mobility management
- Dynamic Air Interface Resource Allocation (Scheduler)
- Load balancing of simultaneous bearers to different users
- Interference management among base stations
- Ensuring QoS (service-subscriber)

Inter eNodeB interface

- Handover management
 - If target eNodeB is known and reachable -> eNodeBs communicate (neighbor relations through mobile devices)
 - If not, over the core network
- Inter-cell interference coordination
 - Mobile devices report noise levels to their serving eNodeB
 - Contact with neighboring eNodeB to mitigate the problem

Closer look to LTE

LTE/EPC Network Elements

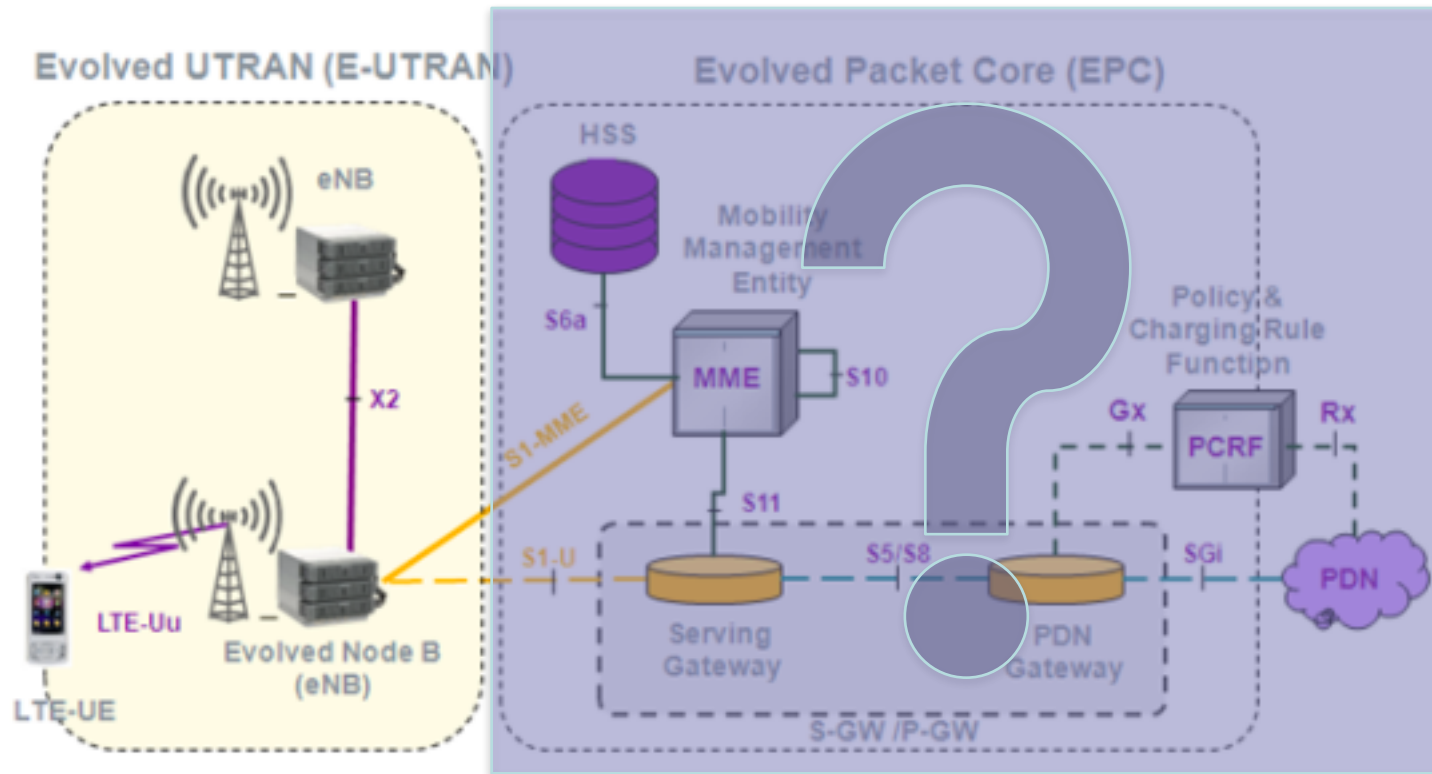

Home Subscriber Service (HSS)

- Central database that contains information about all the network operators subscribers
- Contains the subscription related information (subscriber profiles)
- Performs authentication and authorization of the user
- Provides information about the subscriber's location and IP

Mobility Management Entity (MME)

- **Network Access Control:** MME manages authentication and authorization for the UE.
- **Radio Resource Management:** MME works with the HSS and the RAN to decide the appropriate radio resource management strategy (RRM) that can be UE-specific.
- **Mobility Management:** One of the most complex functions MME performs. Providing seamless inter-working has multiple use cases such as Inter-eNB and Inter-RAT, among others.

Mobility Management Entity (MME)

- **Roaming Management:** MME supports outbound and inbound roaming subscribers from other LTE/EPC systems and legacy networks.
- **UE Reachability:** MME manages communication with the UE and HSS to provide UE reachability and activity-related information.
- **Lawful Intercept:** Since MME manages the control plane of the network, MME can provide the whereabouts of a UE to a law enforcement monitoring facility.

Serving Gateway (S-GW)

- Acts like a high level router
 - Routes and forwards user data packets from eNodeBs to PDN-GW
- Mobility anchor for the user plane during inter-eNB handovers
- Anchor for mobility between LTE and other 3GPP technologies

Packet Data Network Gateway (PDN-GW)


- Point of contact with the outside world
 - Connectivity between the UE to external packet data networks
 - point of exit and entry of traffic for the UE
- The PDN GW performs policy enforcement, packet filtering for each user, charging support, lawful Interception and packet screening.

Policy and Charging Rule Function (PCRF)

How a certain packet is delivered to a certain user considering the QoS and charging?

- QoS: Differentiation of subscribers and services
- Charge subscribers based on their volume of usage of high-bandwidth applications
- Charge extra for QoS guarantees
- Limit app usage while a user is roaming
- Lower the bandwidth of wireless subscribers using heavy-bandwidth apps during peak usage times.


A Simplified Data Flow with 4G...(1/2)

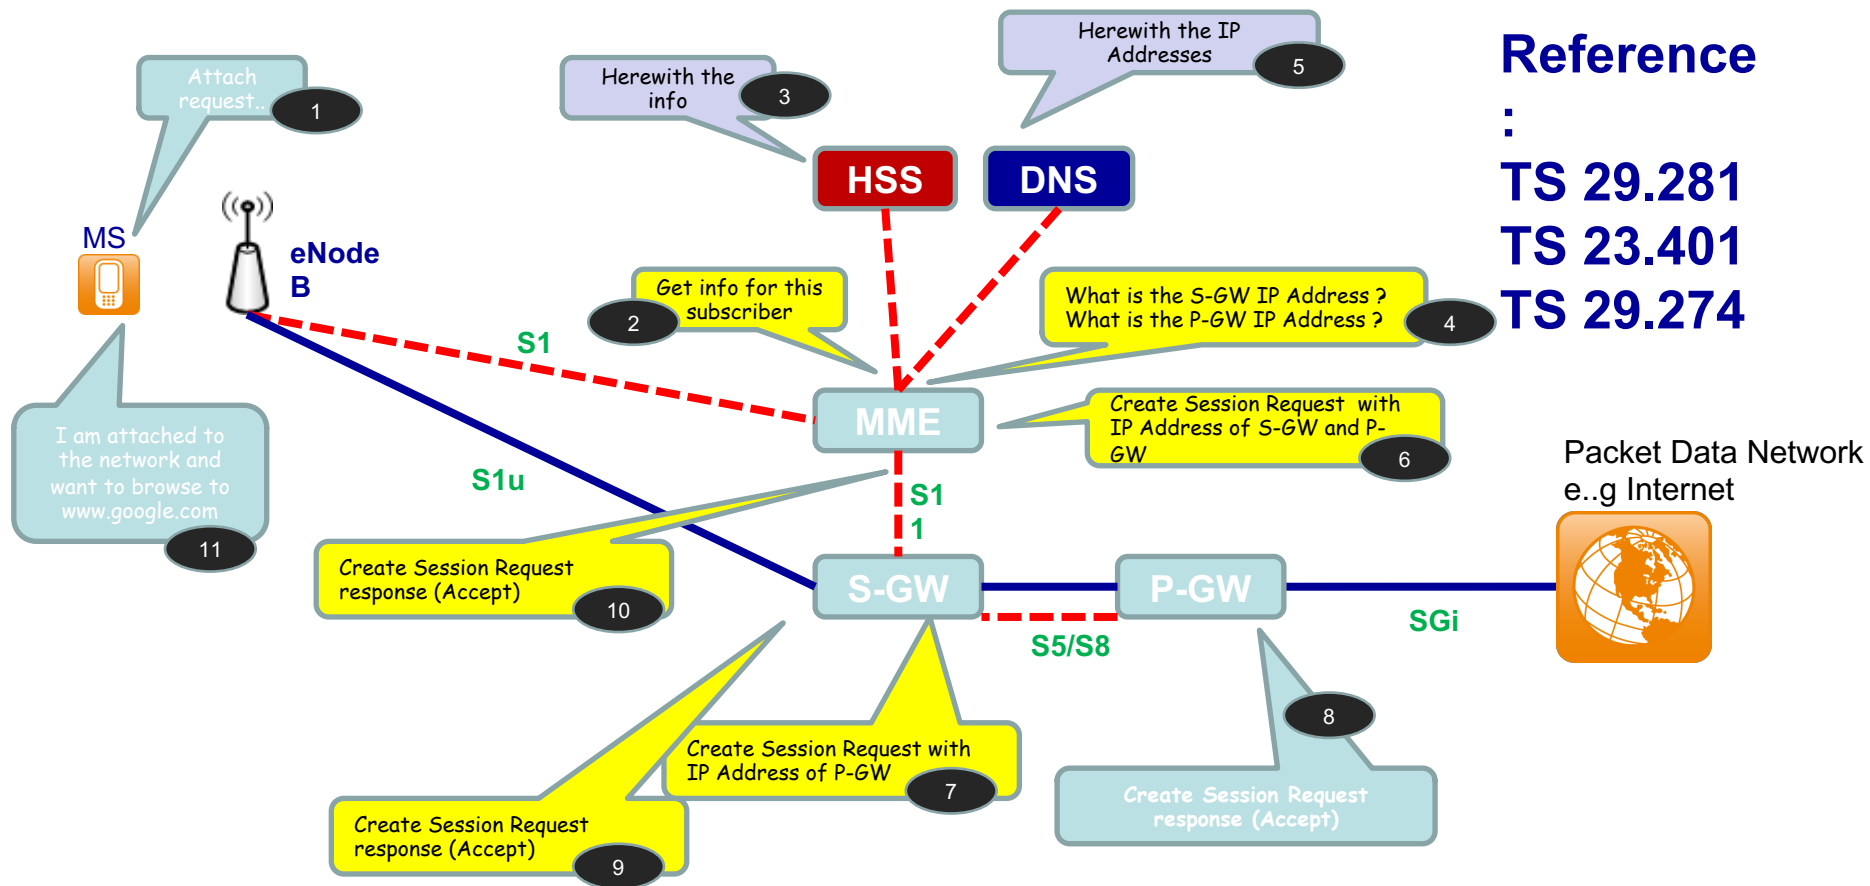

A Simplified Data Flow with 4G... (2/2)

Reference


:
TS 29.281
TS 23.401
TS 29.274

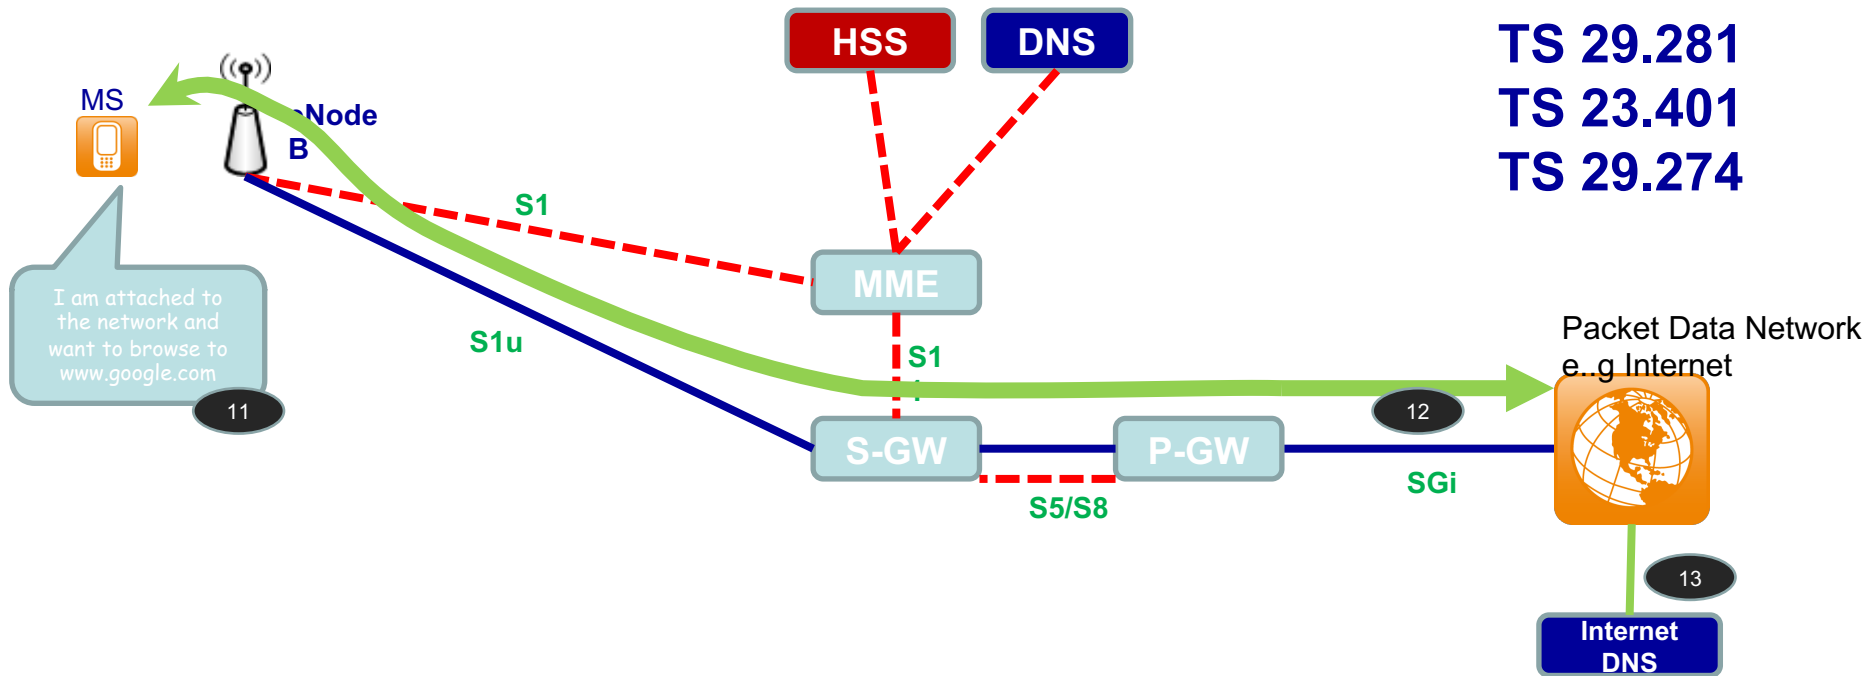

Outline

- Brief history of wireless
- What is wireless communication?
- Bottom-down approach
 - Physical layer : how can we transmit signals in air?
 - Link layer : multiple access
 - Wireless impact higher layers?
- **Wireless Systems**
 - Mobile Broadband Networks
 - Wifi

Wireless LAN Architecture

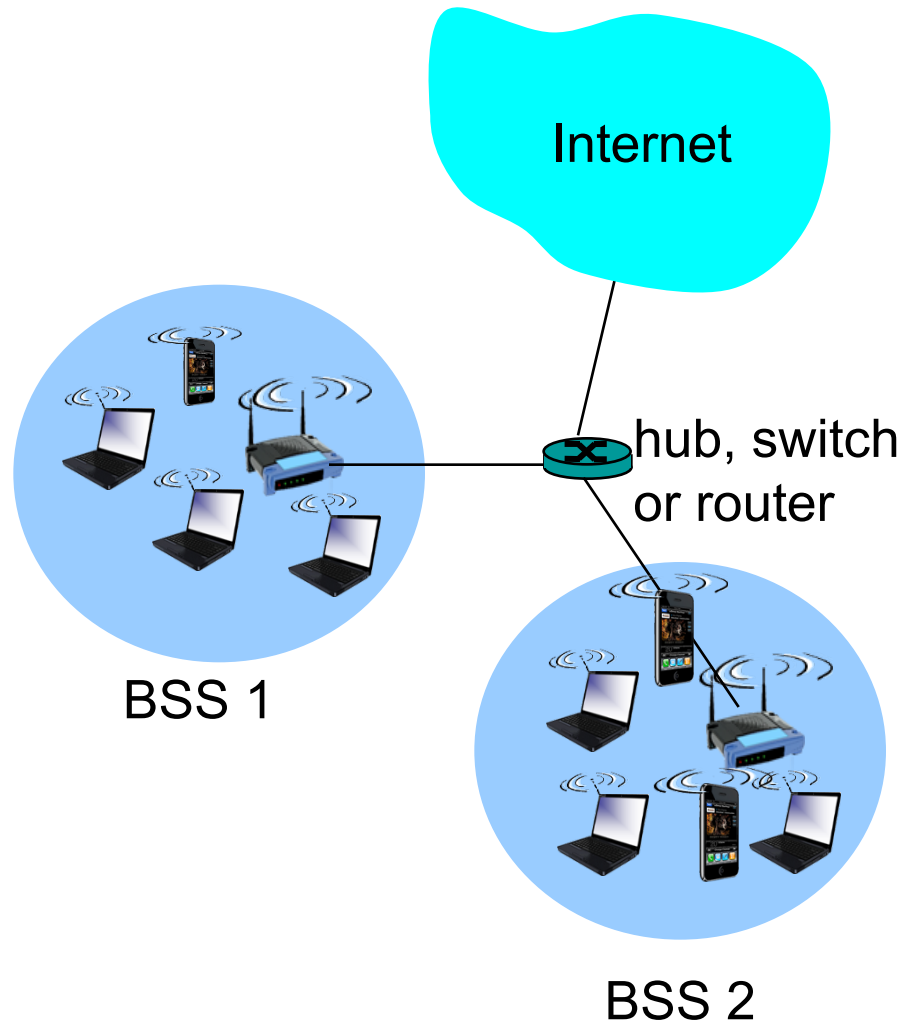

- ❖ wireless host communicates with access points (AP)
- ❖ The owner of the AP becomes the operator
- ❖ Basic Service Set (BSS) in infrastructure mode contains:
 - wireless hosts
 - access point (AP): base station
 - ad hoc mode: hosts only

IEEE 802.11 Wireless LAN

802.11b

- 2.4-5 GHz unlicensed spectrum
- up to 11 Mbps

802.11a

- 5-6 GHz range
- up to 54 Mbps

802.11g


- 2.4-5 GHz range
- up to 54 Mbps

802.11n: multiple antennas

- 2.4-5 GHz range
- up to 200 Mbps

Wireless network characteristics (1)

Multiple wireless senders and receivers create additional problems (beyond multiple access):


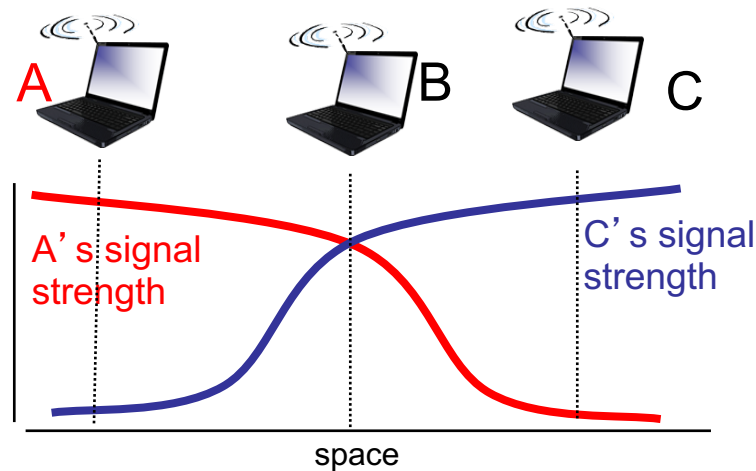


Signal attenuation:

- ❖ B, A hear each other
- ❖ B, C hear each other
- ❖ A, C can not hear each other
interfering at B

Wireless network characteristics (2)

Multiple wireless senders and receivers create additional problems (beyond multiple access):

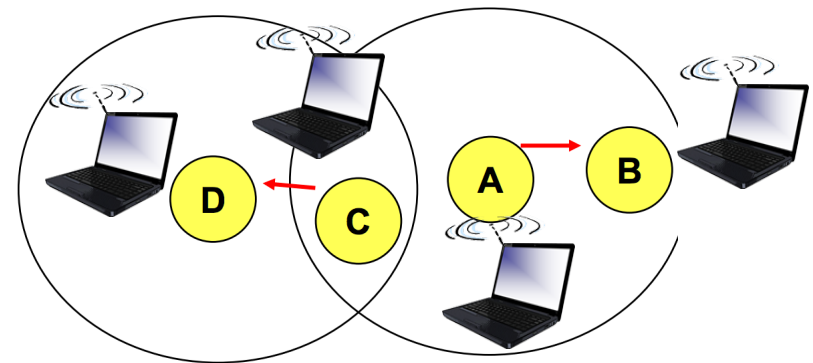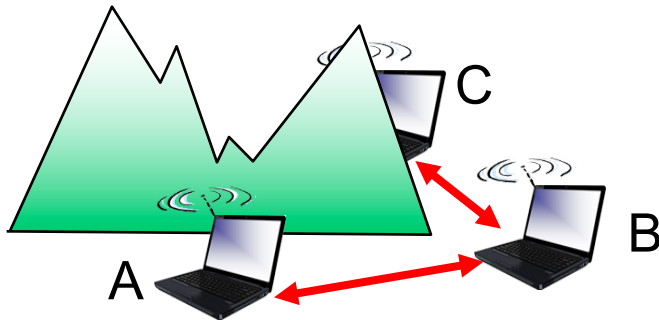

Hidden terminal problem

- ❖ B, A hear each other
- ❖ B, C hear each other
- ❖ A, C can not hear each other means A, C unaware of their interference at B

Exposed terminal problem

- ❖ C wants to send D, A wants to send B
- ❖ When A transmits to B, C waits
- ❖ But D is outside of the range of A, so the wait is unnecessary

Carrier Sense Multiple Access (CSMA)

- Listen (CS) Before Talk (LBT):
 - channel idle: transmit entire frame
 - channel busy: defer transmission
 - 1-Persistent CSMA: retry immediately when channel becomes idle
 - P-Persistent CSMA: retry immediately with probability p when channel becomes idle
 - Non-persistent CSMA: retry after random interval
- Human analogy: don't interrupt others!
 - Politicians are sometimes 1-Persistent...
- Collisions
 - sender 1 may not immediately see 2's transmission (propagation delay)
 - entire frame transmission time wasted

What happens if two senders do this?


Example: IEEE 802.11 CSMA/CA

802.11 sender

- 1 if sense channel idle for **DIFS** then transmit entire frame (no CD)
- 2 if sense channel busy then start random backoff time
timer counts down while channel idle
transmit when timer expires
if no ACK, increase random backoff interval, repeat 2

802.11 receiver

- if frame received OK
return ACK after **SIFS** (ACK needed due to hidden terminal problem)

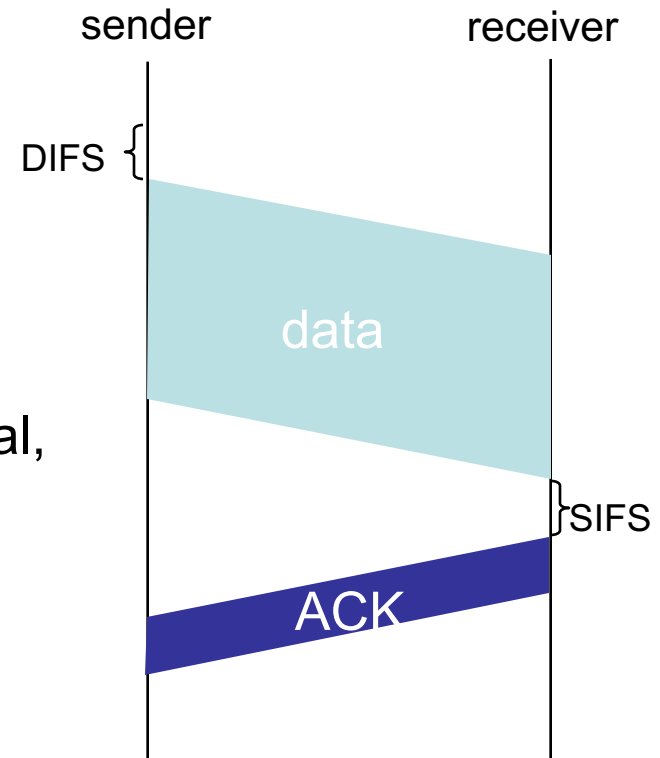


Avoiding collisions

- Idea:** allow sender to “reserve” channel rather than random access of data frames: avoid collisions of long data frames
- sender first transmits *small* request-to-send (RTS) packets to BS using CSMA
 - RTSs may still collide with each other (but they’re short)
 - BS broadcasts clear-to-send CTS in response to RTS
 - CTS heard by all nodes
 - sender transmits data frame
 - other stations defer transmissions

*avoid data frame collisions completely
using small reservation packets!*

Collision Avoidance: RTS-CTS exchange

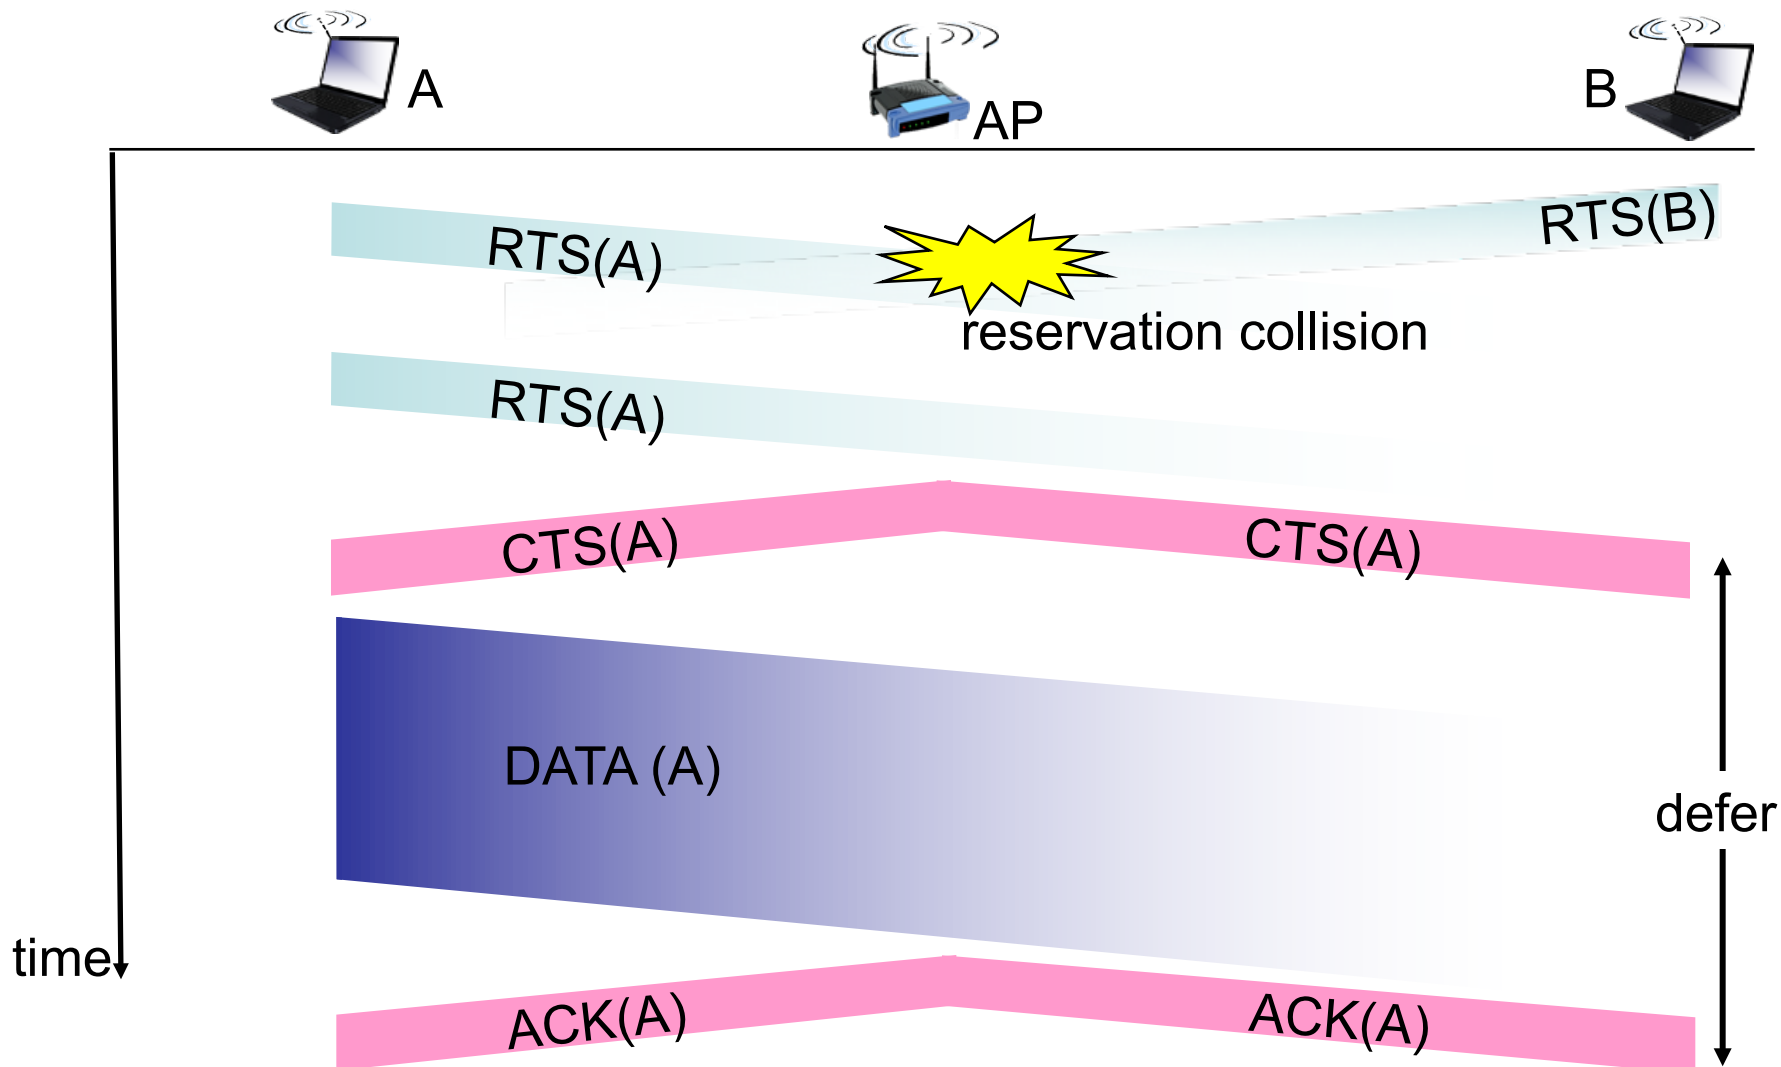

OTHER WIRELESS NETWORKS

Satellite Networks

- More than 500 satellites have been launched, servicing radio, television and telephony.
- Universal Coverage, limited data rate, costly
- Applications:
 - Broadcasting, telephony and backup to terrestrial
 - Military: providing robust and sophisticated secure communications network
 - Mission critical services
 - Autonomous driving and Unmanned Aerial Vehicle
 - Tele-medicine

Wireless Sensor Networks (WSNs)

- Based on 802.15.4
 - Some devices: ZigBee (802.15.4 PHY+MAC + layers 3 / 7)
 - uses CSMA/CA
 - Many devices can run TinyOS or Contiki OSes
- Specific scenarios – alarm based systems, regular measurements, ... => specific improvements possible
 - e.g. static topology, regular updates: can do special routing; can put nodes to sleep when they don't communicate
 - transport: sometimes per-hop reliability
 - often: one static sink => “funneling effect” of traffic going “up the tree”, earlier battery depletion of nodes near the sink
 - Solution: mobile sink (e.g. radio controlled helicopter)

Mobile Ad Hoc Networks (MANETs)

- Mobile devices, also acting as routers
- Memory and CPU restrictions
- Flexible environment, changing topology
- Not too many realistic usage scenarios
 - When do you not have a base station but want to connect anyway?
 - Military battlefield was a common example scenario – is it the only real use case?
 - Better to incorporate base stations and consider the (somewhat less mobile) network formed by the heterogeneous equipment connected in this way
 - Wireless Mesh Network (WMN)

Cognitive Radio

- Spectrum utilization depends strongly on time and place
 - Could do better than always use the same allocated frequencies
- Idea: let unlicensed (“secondary”) users access licensed (“primary”) bands without interfering with licensed (“primary”) users
 - Ideally, access a database which maintains a common view of who uses which spectrum
 - Many issues (e.g. security, incentives for cooperating, ..)

