

UiO **Conversity of Oslo**

INF3480 Evolutionary robotics Kyrre Glette



Today: Evolutionary robotics


- Why evolutionary robotics
- Basics of evolutionary optimization
 INF3490 will discuss algorithms in detail
- Illustrating examples
 - ROBIN in-house robotic platforms and experiments
- Research challenges
 - Reality gap

Machine intelligence in robotics

- Sensing, vision
 - Gather information about the world and represent it internally for further processing
- Control and planning
 - Low-level control
 - Path planning (arms and mobile robots)
 - Task planning
- Design
 - Robot body shape / structure

Example: Henriette




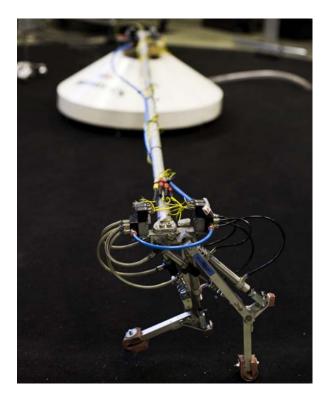

http://www.youtube.com/watch?v=mXpz5khMY2c

UiO **: University of Oslo**

Current robots

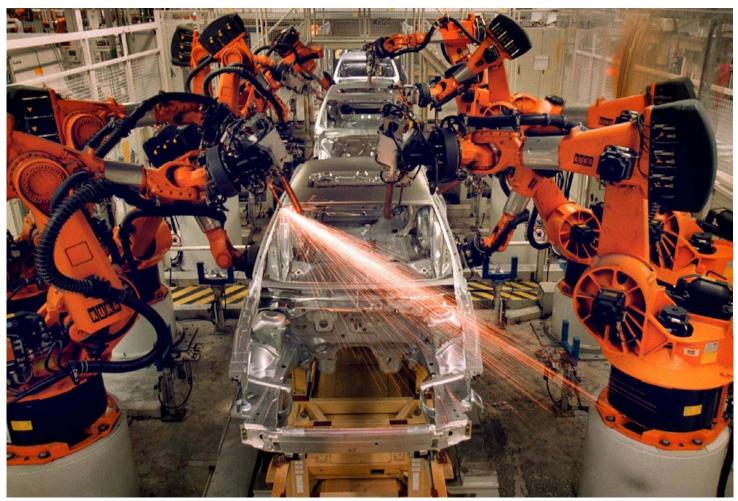


UiO **: University of Oslo**

Future scenarios



7


Future robots

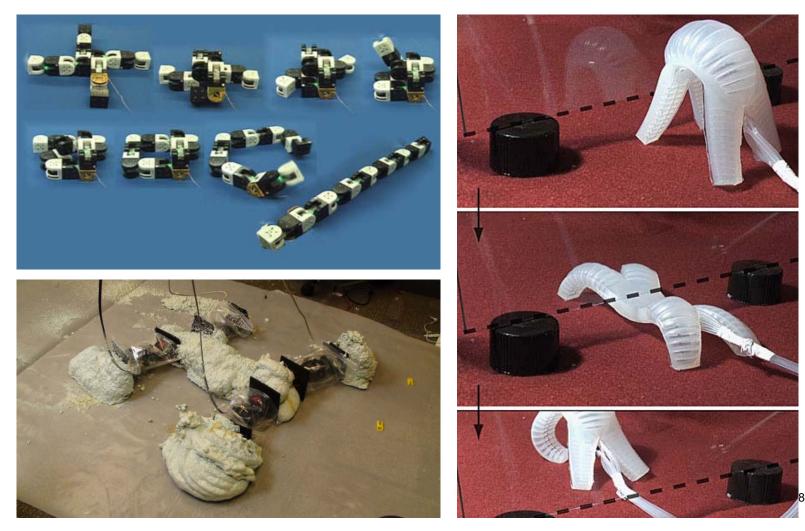

Why evolutionary robotics?


- Adaptation to changes in environment or robot
 - Robot may break or deteriorate
 - Environment may change unexpectedly
- Optimizing for efficiency
 - Energy, speed weight, actuators
- Unconventional, complex designs
 - New materials and actuators make it more challenging with conventional design approaches

Adaptation, optimization, exploration

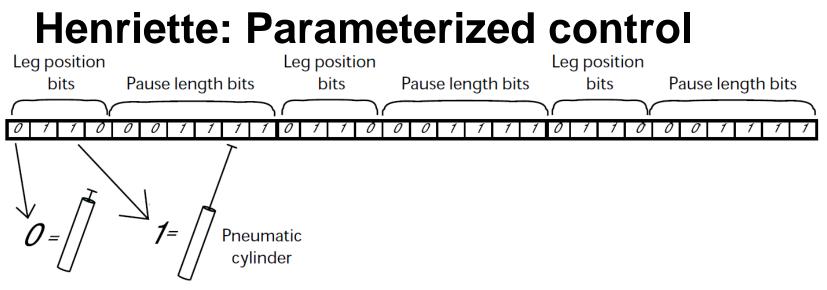

- Walking pattern coded into bit strings.
- 3 "states" consisting of leg configuration and pause length
- An evolutionary algorithm was used to evolve the leg configurations and the pause length.
- For each leg configuration, 4 bits denote the position of 4 actuators, 6 bits denote the length of the pause.
- Total bit string / genome length: 30 bits

Evolutionary Algorithm (EA)

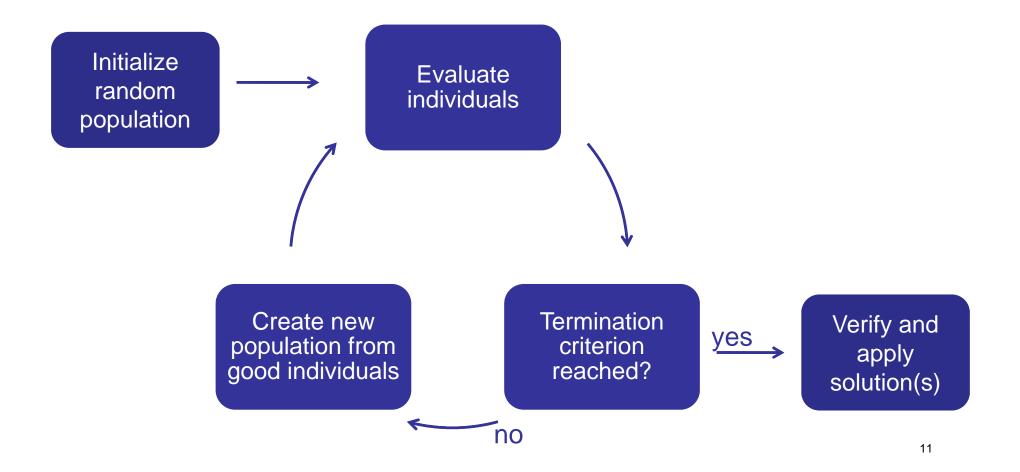


Evolutionary mechanisms

- Selection
 - Good / fit individuals have a higher chance of reproducing
- Inheritance
 - Properties from parents are transferred to offspring
- Variation
 - Changes in the genome adjust the behavior of the offspring, sometimes to the better

Selection

- Each *individual* in a population is evaluated and assigned a *fitness* value, ie. a measure of how a solution performs a given task
 - Example: The forward speed of a robot
 - Henriette: measured by the angular difference from the rotation encoder over 3 repetitions of the sequence
- The probability of an individual being selected for reproduction is proportional to its fitness value (randomness is present)

Inheritance + variation

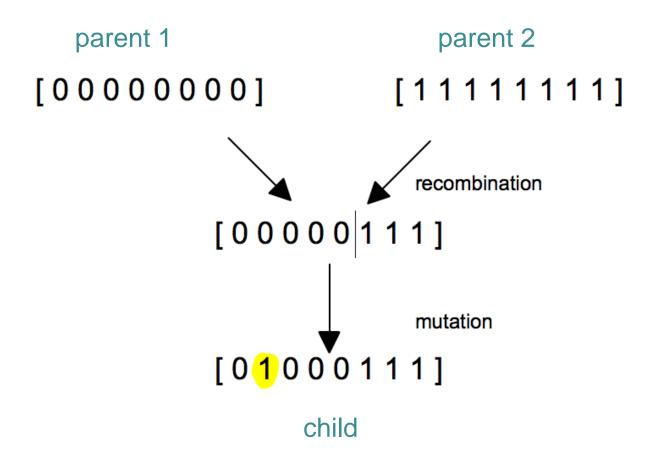

Without bio-terminology, what is an EA?

- A population-based stochastic search algorithm
 - Searching for *satisfactory* solutions in a solution space of all possible solutions
 - Searches in «parallel» on a population of solutions
 - Black-box: does not assume knowledge about the problem (but the results depend on the mapping and fitness function)
- Can handle large search spaces with complex fitness landscape
 - Less chance of being stuck in local optima
- Can give unexpected results




 \rightarrow


Simulation

- Evolution on a real robot is impractical
 - Time consuming
 - Requires supervision: can get stuck, fall over
 - Mechanical wear
- Simulation should help
 - Allows automated evaluation
 - Can be much faster
 - especially with parallel computation

Example: Quadratot

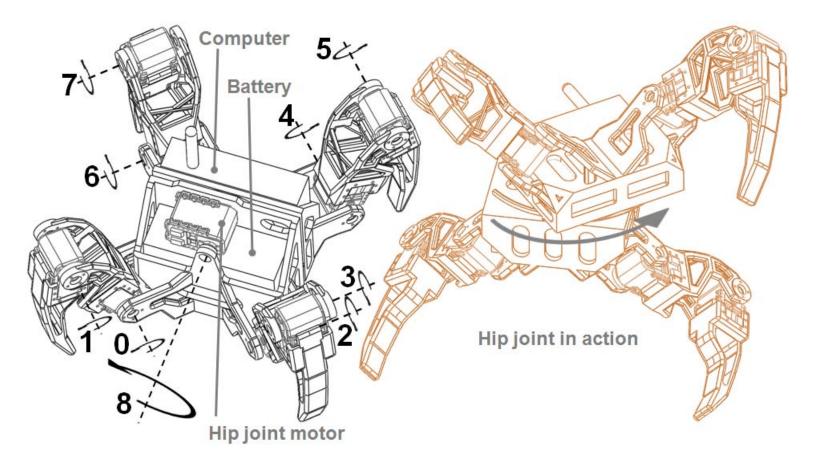

Quadratot: Hardware and model (DEMO)

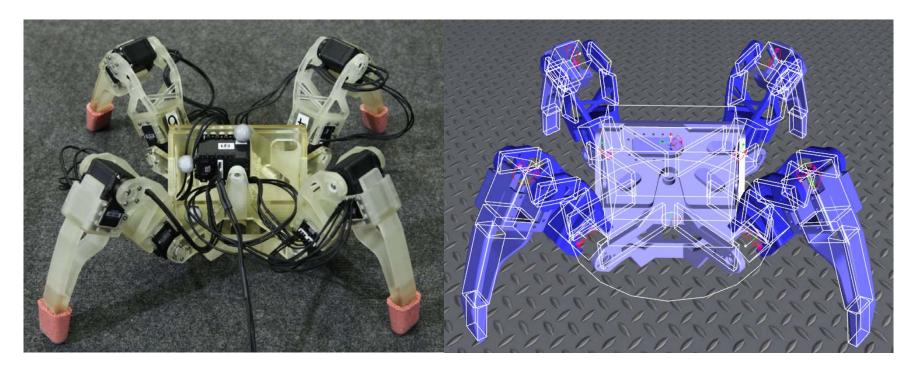

3D printed parts AX12/18 servos Silicone rubber socks NVIDIA PhysX Revolute motor joints Rigid bodies (boxes)

18





Quadratot: Parameterized control (mapping)




For each joint:


- Curve shape parameters (4)
- Phase
- Amplitude
- Center angle

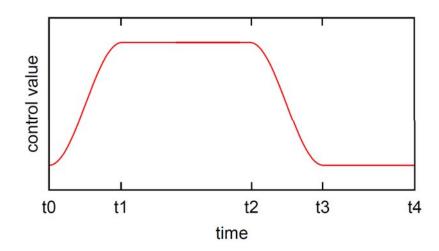

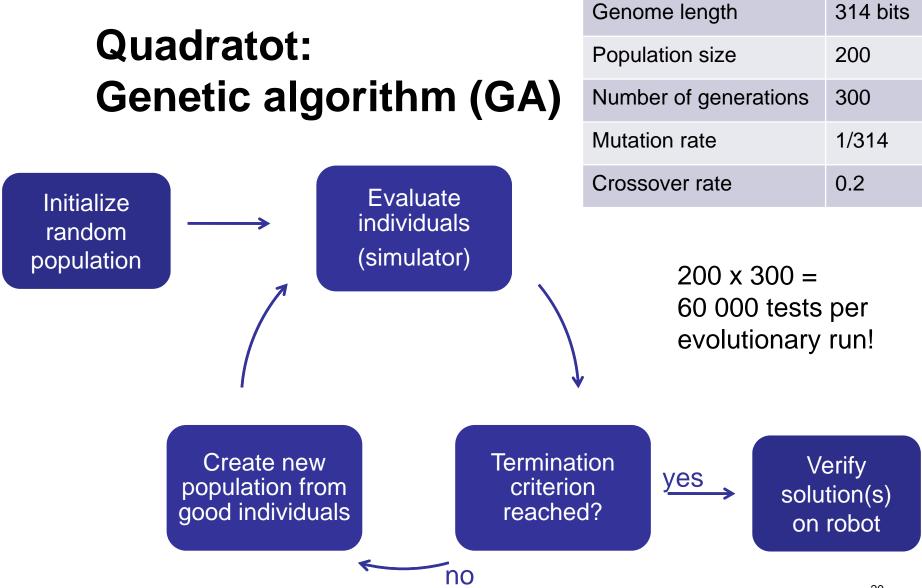


UiO **: University of Oslo**

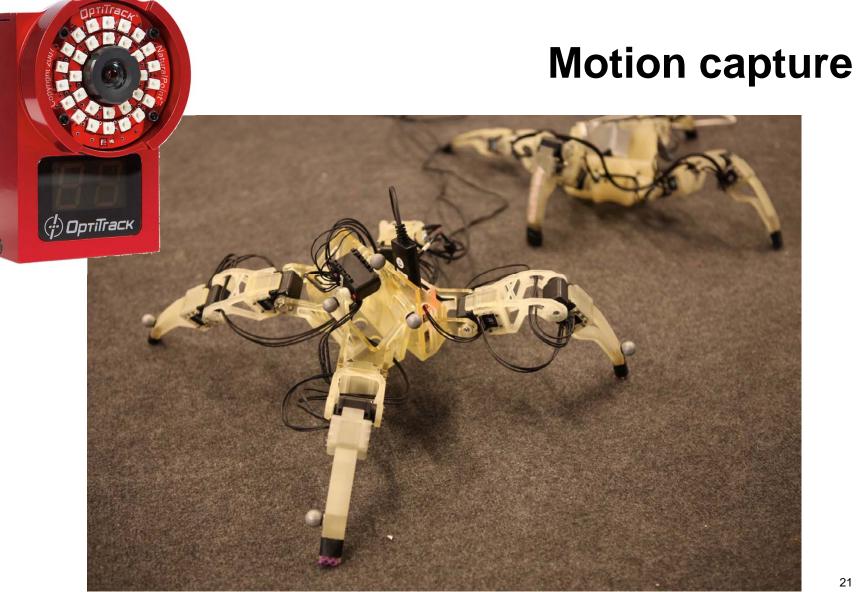


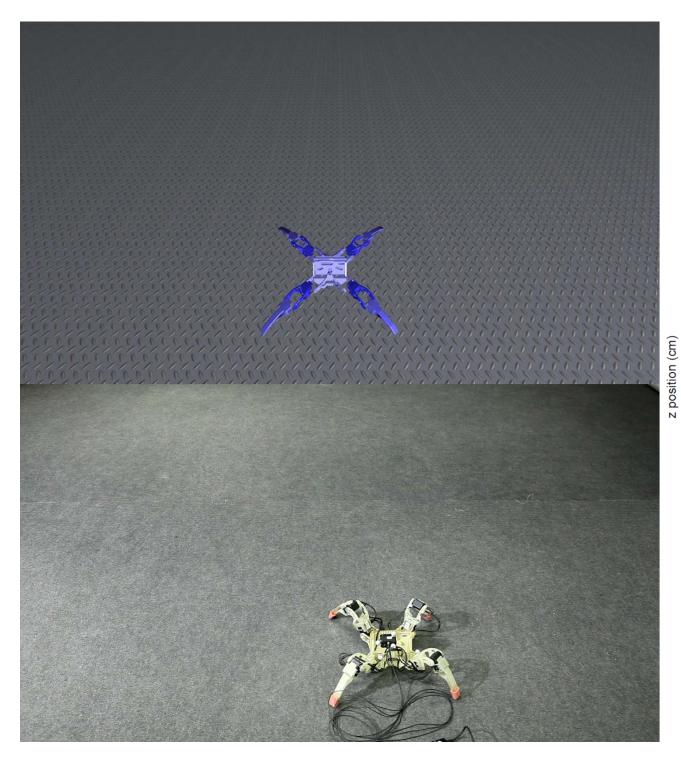

Quadratot: Evolved gait

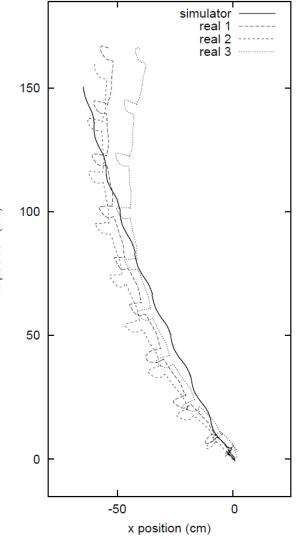

Benefits of simulation

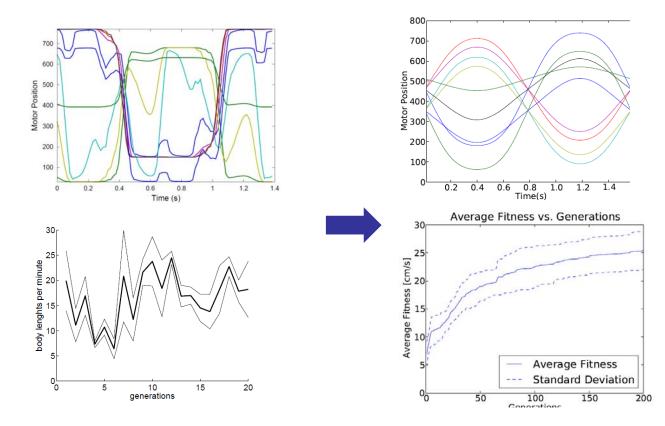


		Simulated	Real Vel.	Real Vel.
	Evaluations	Velocity	(CCML)	(ROBIN)
Parameterized gaits + optimization [25]	153	-	5.8	_
HyperNEAT in hardware [25]	180	-	9.7	_
RL PoWER Spline [18]	300	-	11.1	_
GA + simulator [9]	60000			17.8
HyperNEAT + simulator [this paper]	40000	**25.4	14.5	_

Challenge: Reality gap

- A simulator cannot capture all aspects of reality
- Evolved solutions may exploit features of the simulator not present in reality

 \rightarrow The solutions evolved in simulation behave differently when applied to the real robot!

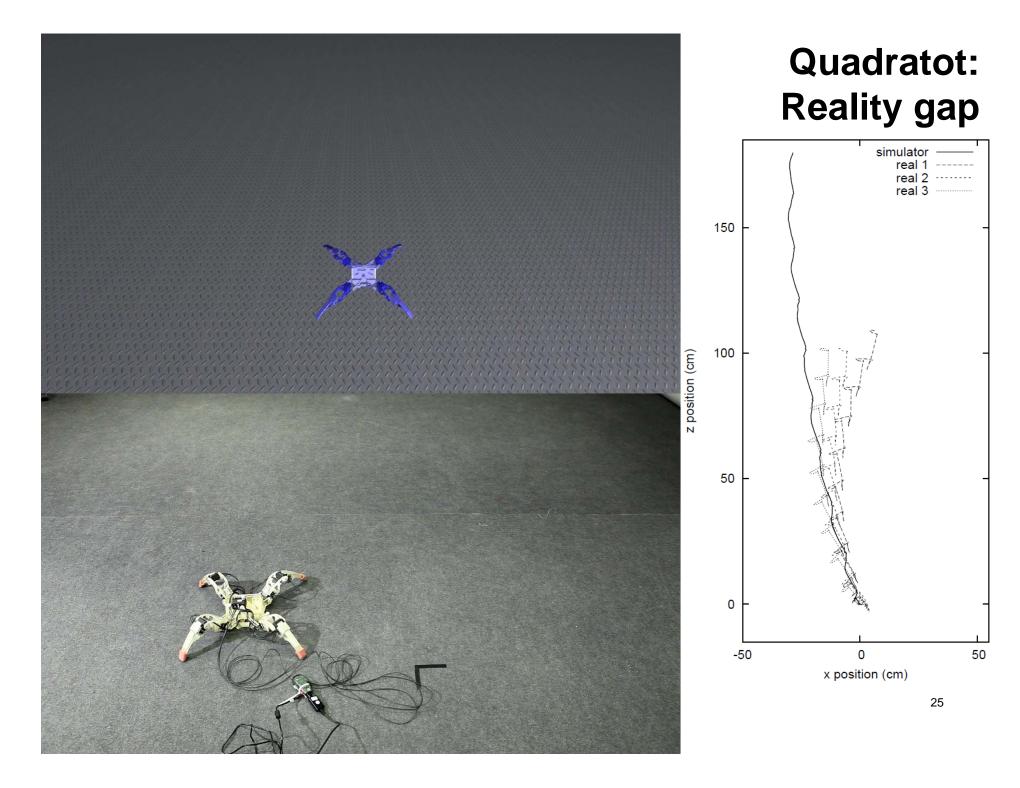

How to deal with the reality gap?


• Ideas?

How to deal with the reality gap

- 1. Increase simulation fidelity
 - Manually: do more precise measurements, increase solver accuracy
 - Automatically: measure deviation simulation-reality, autotune simulator for smaller deviation
- 2. Do not allow for solutions using badly simulated behaviour
 - Manually: E.g. Encourage slow, static movements, add noise
 - Automatically: Avoid solution types that transfer poorly
- 3. Online learning after deployment on real robot
 - Can use more evolution, reinforcement learning, or other method

1. Automatic simulator tuning


- Sample from real world
 - Test selected solutions on real robot
- Tune (evolve) simulator to fit all samples
- Evolve new solutions using tuned simulator

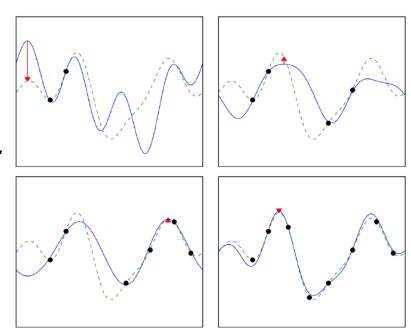

Self-modeling robot (Cornell U.)


- Creates self-model through exploratory actions
- Uses evolution to search for walking pattern using selfmodel
- If the robot is broken, a new selfmodel is constructed

http://youtu.be/3HFAB7frZWM

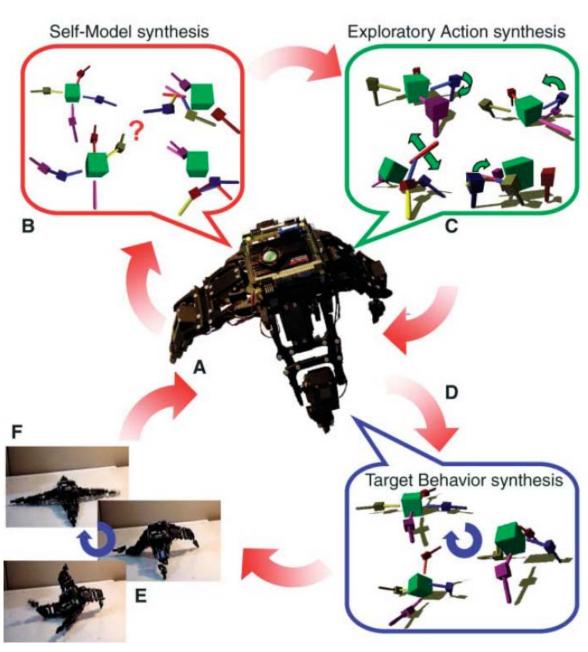


http://youtu.be/qDPbXvADyio http://youtu.be/MSwdmC0dZ74

2. Transferability (UPMC, Paris)

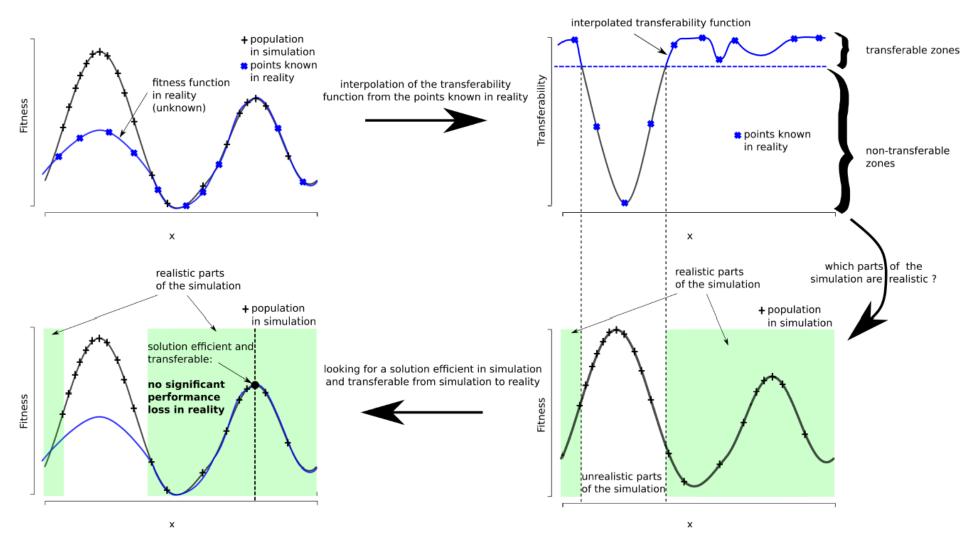

3. Adaptation after transferral (VIDEO)


- Reality gap is «accepted»
- Adaptation algorithm is carried out on the real robot
- Needs to take into account fewer tests and more noise

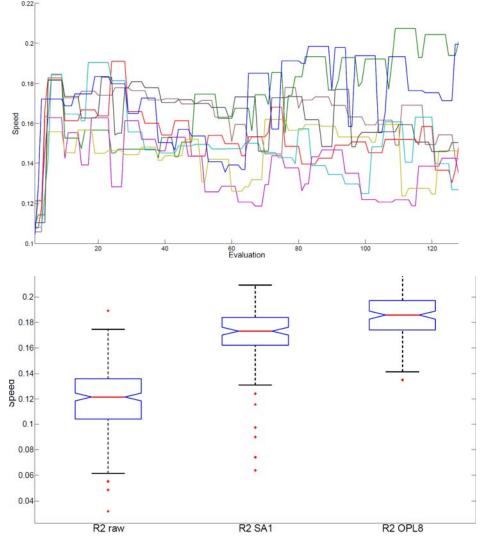


HONDA

Evolving shape and control


- Physics simulation allows evolution of shape and control simultaneously
 - More efficient designs for complex problems?
 - New designs for new environments?
 - Allows for offloading computation to the body?
- Sims: <u>http://youtu.be/JBgG_VSP7f8</u>
- GOLEM: <u>http://youtu.be/sLtXXFw_q8c</u>
- Soft robot: <u>http://youtu.be/z9ptOeByLA4</u>

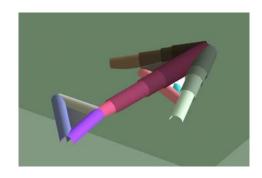

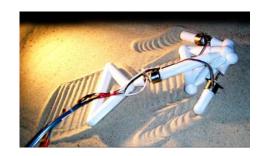


Example: «hox» body evolution


- Generative approach
 - A program builds the robot plan rather than all parameters directly coded
 - Allows a variety of bodies from a compact code
- Designed for production with 3D printer and commercial servos

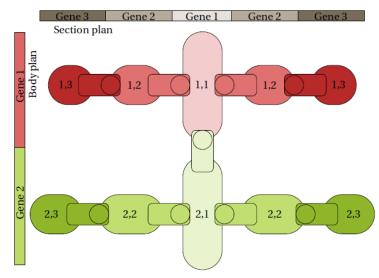


«hox»: Some results (video)






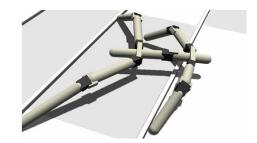

Results: different bodies

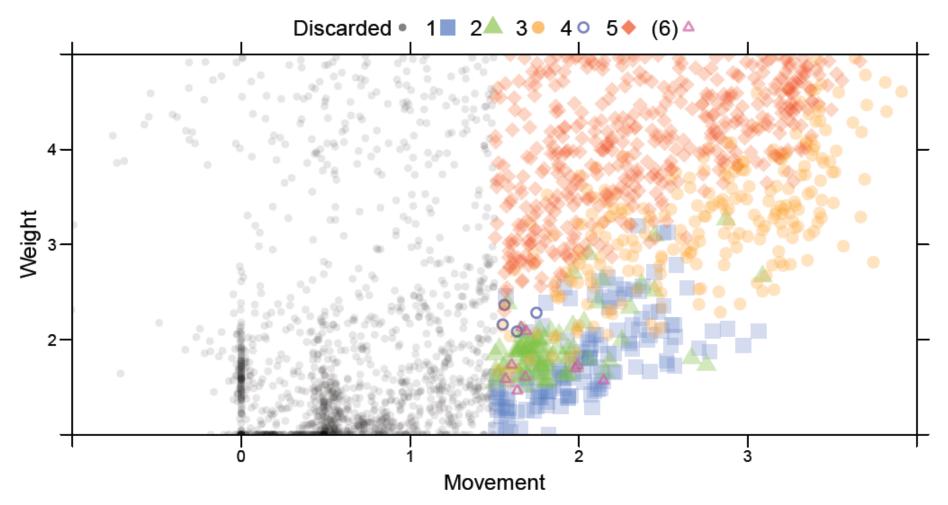

UiO **: University of Oslo**

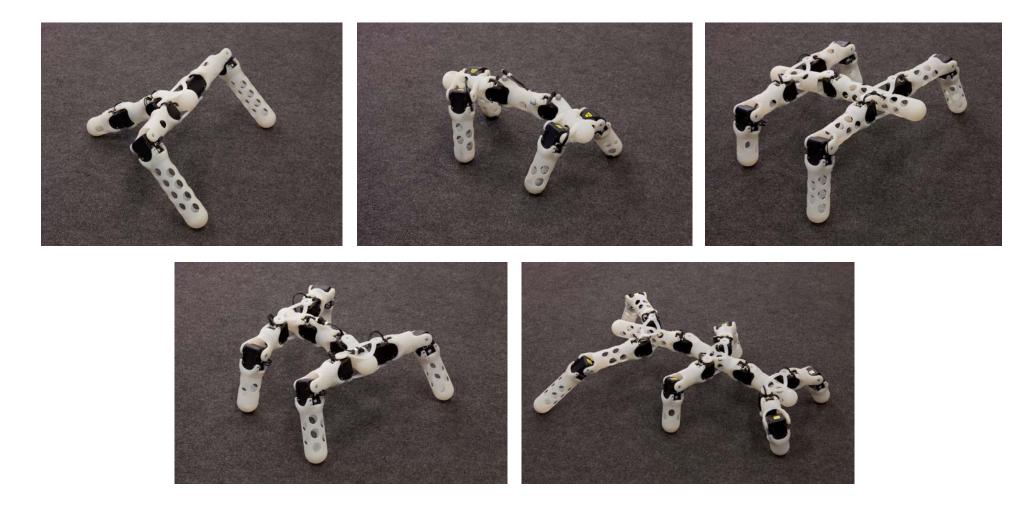

Summary

- Evolutionary robotics can be useful for adaptation, optimization, design exploration
- Simulation is useful for evolutionary search
- The reality gap remains a research challenge – Simulator tuning, transferability, online adaptation
- Co-evolution of body and control gives new possibilities

Master's thesis in robotics and intelligent systems (ROBIN group)

- Many possible topics
 - FPGA
 - Rapid prototyping
 - Machine learning
 - Intelligent, evolutionary and adaptive robots
 - Medical robotics and robotics in health care
 - Music technology
- Possible collaboration with external partners
- Perfect background for current and future industry ⁽ⁱ⁾

http://www.uio.no/studier/program/inf-nor-master/studieretninger/robotikk/opptak/

Master's projects in evolutionary robotics at the ROBIN group







- Integration of locomotion
 learning platform

 (evolutionary algorithm + simulator + hardware interface + sensing)
- Evolution of locomotion patterns for robots (walking, crawling, obstacles, adaptivity, robustness, neural networks, ...)
- Reality gap research (testing various algorithms for a smooth transfer from simulator to reality)
- Design and build new robot (CAD, 3D print, electronics, simulator)



2.5

2

1.5

0.5

Speed

Example MSc project: Karkinos

 Hybrid automatic / engineered design of robot shape and control











UiO: University of Oslo Example MSc project: Reality gap

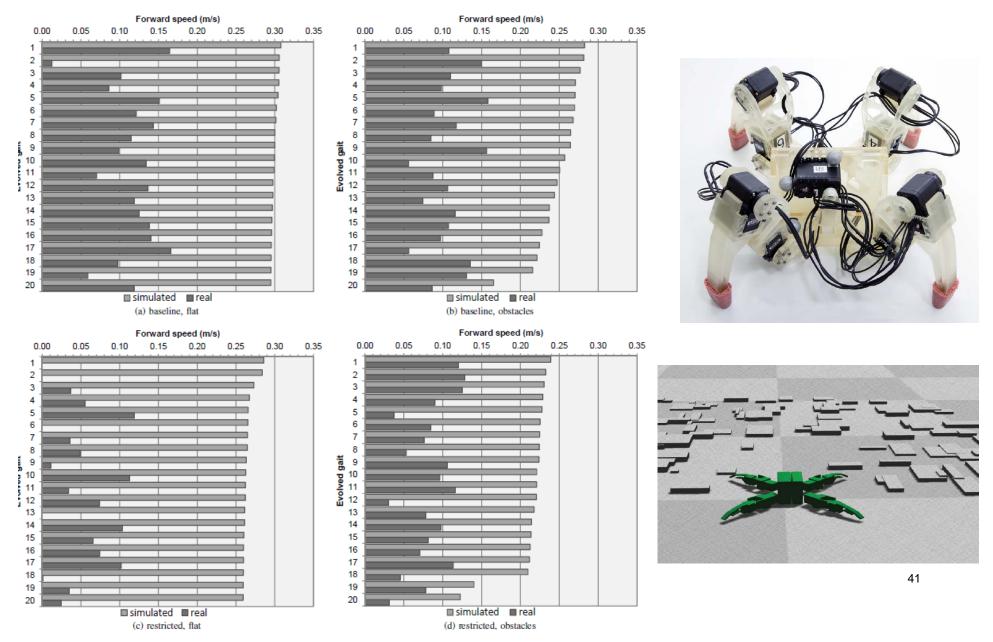



Example gait

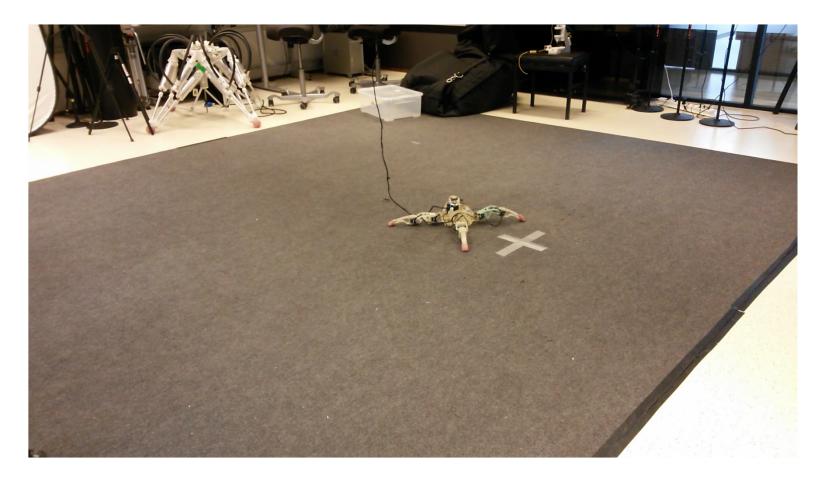

Relevant courses

- INF3490 Biologically inspired computing
- INF4500 Rapid prototyping of robotic systems

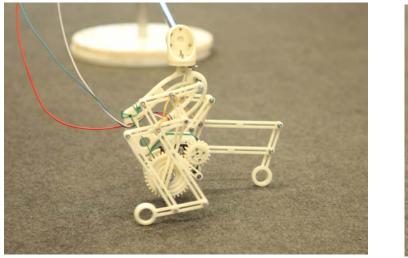

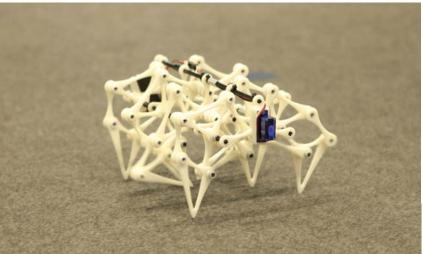

Bonus video

https://youtu.be/p6oegqDrCDs