



GSM speech coding

Wolfgang Leister
Forelesning INF 5080
Vårsemester 2004

Norsk Regnesentral



Sources

This part contains material from:

- Web pages Universität Bremen, Arbeitsbereich Nachrichtentechnik (ANT): Prof.K.D. Kammeyer, Jörg Bitzer, Frank Jordan, Volker Kühn
http://www.comm.uni-bremen.de/whomes/meyer/gsm_coder.html
- Sten Amundsen (INF-MKT presentation 2003)

Norsk Regnesentral
Wolfgang Leister

10-Mar-05



GSM

- Global System for Mobile communications,
 - originally developed for Europe
 - has now over 70% of the world market.
- Initially developed for operation in the 900MHz band and subsequently modified for the 850, 1800 and 1900MHz bands.
- GSM = Groupe Speciale Mobile (CEPT committee), 1982
- 1987: Memorandum to implement
- 1991: Start of operation

10-Mar-05

Norsk Regnesentral
Wolfgang Leister



GSM

- Best possible use of frequencies
- lower bandwidth than PSTN, LAN, WAN, etc: 13kBit/s
- mobile networks suffer from interferences and dropouts
 - but: not disturb end user
- GSM uses block coding
 - PCM and MPEG-1, MPEG-2 uses continuous coding
- Originally GSM is designed for:
 - One channel 16 kbit/s
 - Noise: BER of 10^{-2}
 - Maximum coding delay: 30 ms


10-Mar-05

Norsk Regnesentral
Wolfgang Leister



GSM system architecture

- radio access network and base net.
- Speech connection between GSM phone and PSTN or GSM

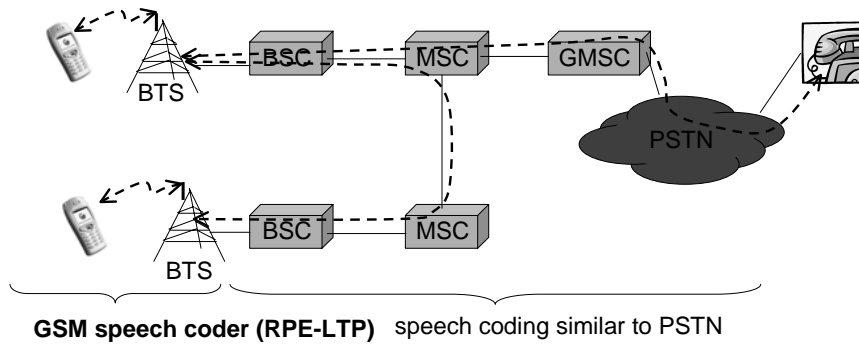


10-Mar-05

Norsk Regnesentral
Wolfgang Leister



Sender Functionality

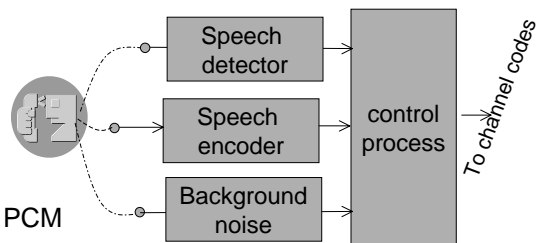


- Speech encoder receives PCM coded speech.
- Speech detector marks frames whether they contain speech.
- Background noise is sent in "silent suppression" mode.

10-Mar-05

Norsk Regnesentral
Wolfgang Leister



Receiver Functionality

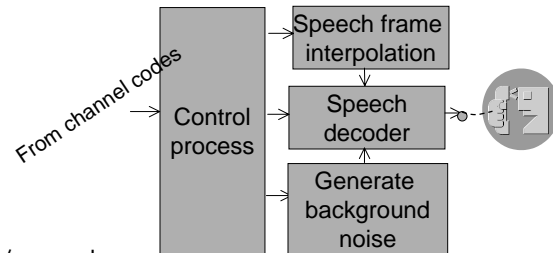

- Speech decoder gets 13 kbit/s speech
- Speech frame interpolation replaces frames lost in transmission (using last received frame)
- Generate background noise using noise frames.

10-Mar-05

Norsk Regnesentral
Wolfgang Leister



Speech coding

- Speech:
 - bandwidth ca. 12 kHz
 - dynamics: 100 dB (whisper-shout)
 - 20 Bit resolution at 24kHz sampling rate: 480 kBit/s
- Understandable speech:
 - bandwidth 300Hz-3400Hz (telephone)
 - dynamics: 50 dB
 - 8 Bit resolution at 8kHz sampling rate: 64 kBit/s
- Handy: 13 kBit/s
 - coding of speech signal necessary (source coding)


10-Mar-05

Norsk Regnesentral
Wolfgang Leister




What is speech?

■ Speech Generation:



■ Artificial Speech Model:



10-Mar-05


Norsk Regnesentral
Wolfgang Leister



GSM speech encoder overview

Five Steps:

- AD conversion
- PCM sample blocks
- LPC = Linear Predictive Coding
- LTP = Long-Term Prediction
- RPE = Regular Pulse Excitation

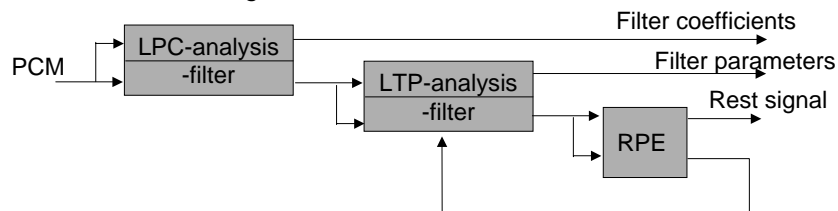


10-Mar-05

Norsk Regnesentral
Wolfgang Leister



GSM Speech encoder

- Step 1: produce digital audio/speech signal (microphone, low-pass filter, A/D converter)
- Step 2: Split up in blocks of 20 ms (160 samples) statistical parameters do not change in short time intervals (assume: short-time stationary behaviour)

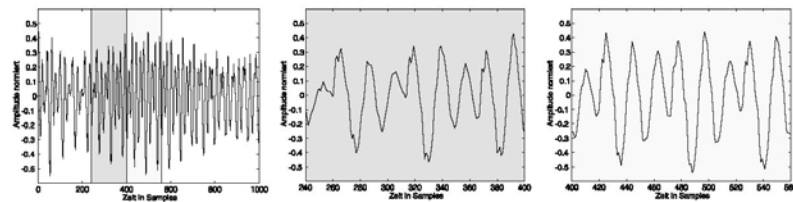

Norsk Regnesentral
Wolfgang Leister


10-Mar-05



GSM Speech encoder

- Step 3: Linear Predictive Coding
 - Find filter coefficients with parametric estimation, e.g., Burg Algorithm
 - Find reflection coefficients for lower data rate, quantize logarithmically
 - Filter signal with quantized coefficients
 - LPC uses 36 Bit/160 Samples transfer rate

Parameter	1	2	3	4	5	6	7	8
Bits	6	6	5	5	4	4	3	3
Wert	-0.932	0.735	0.145	0.69	-0.16	0.36	-0.2	-0.4

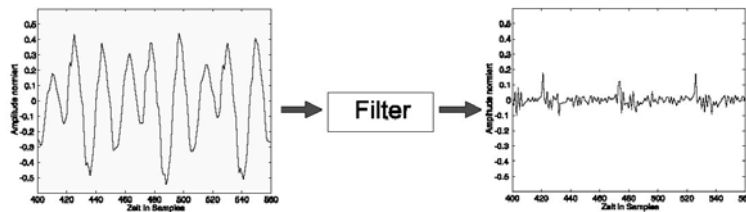

Norsk Regnesentral
Wolfgang Leister

10-Mar-05







GSM Speech encoder

Step 4: Long-Term Prediction

Split blocks into four parts of 40 samples each
There are still similarities in the encoding!

For each block calculate difference to RPE from last step (cross-correlation)
Calculate translation N_0 and amplification b
LPT uses $(2+7)*4$ Bit/160 samples transfer rate



Norsk Regnesentral
Wolfgang Leister




10-Mar-05



GSM Speech encoder

Step 5: Regular Pulse Excitation

- (a) Low pass filter with linear phase TP of degree 10




Norsk Regnesentral
Wolfgang Leister

10-Mar-05



GSM Speech encoder

- Step 5: Regular Pulse Excitation
 - (b) Split rest signal into 3 polyphases
 - chose polyphase with largest energy

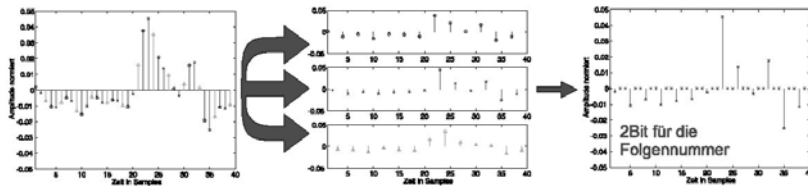

- (c) Normation of max value of chose sequence (6bit)
- quantize these 13 values with 3 bit linear
- RPE uses $(2+6+13*3)*4$ Bit/160 samples transfer rate

Norsk Regnesentral
Wolfgang Leister

10-Mar-05



GSM transfer rate

For 160 samples we need:

LPC filter coefficients		36 Bit
LTP filter coefficients	$(7+2)*4$	36 Bit
Index and Norm Step 5	$(6+2)*4$	32 Bit
Rest signal	$13*3*4$	156 Bit
		260 Bit

Data rate: $260\text{bit}/20\text{ms} = 13\text{kbit/s}$


Norsk Regnesentral
Wolfgang Leister

10-Mar-05



GSM speech coding

- Encoder consists of following parts:
 - Short term LPC (Linear Prediction Coding) -analysis
 - Short term LPC-filter
 - Long term LTP (Long Term Prediction) -analysis
 - Long term LTP-filter
 - RPE (Regular Pulse Excitation) position and coding of rest signal

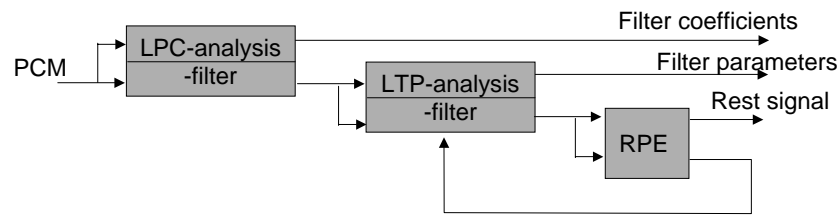


10-Mar-05

Norsk Regnesentral
Wolfgang Leister



LPE-LPT speech decoder

- Decoder consists of three parts:
 - RPE decoding and position
 - LTP synthesis filter
 - LPC short time synthesis filter

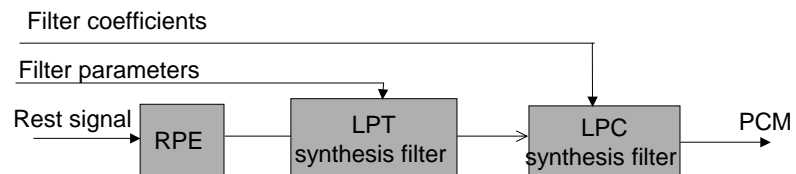

10-Mar-05

Norsk Regnesentral
Wolfgang Leister



GSM Sound examples

- Original
- GSM full-rate 13 kBit/s, error-free transmission
- Enhanced GSM full-rate 12,2 kBit/s, error-free transmission
- GSM half-rate 5.6 kBit/s, error-free transmission
- old Vocoder 5 kBit/s (no standard)

	original	GSM full-rate, 13 kBit	enhanced GSM full-rate, 13 kBit	GSM half-rate, 5.6 kBit	Old LPC- Vocoder (5kBit/s)	
Male voice, english, 8 kHz, 16 Bit linear						
Male voice, german, 8 kHz, 16 Bit linear						
Music sample, 8 kHz, 16 Bit linear						

Norsk Regnesentral
Wolfgang Leister

10-Mar-05



Future Development

- GSM is an ETSI standard
- RPE-LPT standardised for GSM by ETSI
- Three RPE-LTP speech coder standards:
 - FR: Full rate: 13 kbit/s
 - HR: Half rate: 5.6 kbit/s (frequency usage better, worse speech quality)
 - EFR: enhanced full rate: 12.2 kbit/s (better speech quality than FR)
- New specifications by ETSI
- Defines dynamic way to change speech encoders

Norsk Regnesentral
Wolfgang Leister

10-Mar-05



End of Part



Thank you for your attention!

10-Mar-05

Norsk Regnesentral
Wolfgang Leister