

# STK3405 – Week 43

A. B. Huseby & K. R. Dahl

Department of Mathematics  
University of Oslo, Norway

## Association and bounds for the system reliability

# Upper and lower bounds for the reliability of monotone systems

# Associated random variables

## Definition (Associated random variables)

Let  $T_1, \dots, T_n$  be random variables, and let  $\mathbf{T} = (T_1, \dots, T_n)$ . We say that  $T_1, \dots, T_n$  are associated if

$$\text{Cov}(\Gamma(\mathbf{T}), \Delta(\mathbf{T})) \geq 0,$$

for all binary non-decreasing functions  $\Gamma$  and  $\Delta$ .

NOTE: We only require  $\text{Cov}(\Gamma(\mathbf{T}), \Delta(\mathbf{T})) \geq 0$  for all *binary* non-decreasing functions.

## Associated random variables (cont.)

### Theorem (Generalized covariance property)

Let  $T_1, \dots, T_n$  be associated random variables, and  $f$  and  $g$  functions which are non-decreasing in each argument such that  $\text{Cov}(f(\mathbf{T}), g(\mathbf{T}))$  exists, i.e.,

$$E[|f(\mathbf{T})|] < \infty, E[|g(\mathbf{T})|] < \infty, E[|f(\mathbf{T})g(\mathbf{T})|] < \infty.$$

Then we have:

$$\text{Cov}(f(\mathbf{T}), g(\mathbf{T})) \geq 0.$$

# Bounds for the system reliability

## Theorem (6.2.1)

Let  $T_1, \dots, T_n$  be associated random variables such that  $0 \leq T_i \leq 1$ ,  $i = 1, \dots, n$ . Then, we have:

$$E\left[\prod_{i=1}^n T_i\right] \geq \prod_{i=1}^n E[T_i]$$

$$E\left[\prod_{i=1}^n T_i\right] \leq \prod_{i=1}^n E[T_i]$$

## Bounds for the system reliability (cont.)

PROOF: Note that since  $0 \leq T_i \leq 1$ , both  $T_i$  and  $S_i = 1 - T_i$  are non-negative random variables,  $i = 1, \dots, n$ . Hence, the product functions  $\prod_{i=j}^n T_i$  and  $\prod_{i=j}^n S_i$  are non-decreasing in each argument,  $j = 1, \dots, n$ .

By using the generalized covariance property, we find:

$$E\left[\prod_{i=1}^n T_i\right] - E[T_1]E\left[\prod_{i=2}^n T_i\right] = \text{Cov}\left(T_1, \prod_{i=2}^n T_i\right) \geq 0,$$

since the product function is non-decreasing in each argument.

This implies that:

$$E\left[\prod_{i=1}^n T_i\right] \geq E[T_1]E\left[\prod_{i=2}^n T_i\right].$$

By repeated use of this inequality, we get the first inequality.

## Bounds for the system reliability (cont.)

From the extension of property (iii),  $S_1, \dots, S_n$  are associated random variables. Moreover,  $0 \leq S_i \leq 1$ ,  $i = 1, \dots, n$ , so we can apply the first inequality to these variables.

From this it follows that:

$$\begin{aligned} E\left[\prod_{i=1}^n T_i\right] &= 1 - E\left[\prod_{i=1}^n (1 - T_i)\right] = 1 - E\left[\prod_{i=1}^n S_i\right] \\ &\leq 1 - \prod_{i=1}^n E(S_i) = 1 - \prod_{i=1}^n (1 - E[T_i]) \\ &= \prod_{i=1}^n E[T_i], \end{aligned}$$

so the second inequality is proved as well.



## Bounds for the system reliability (cont.)

We apply the theorem to the component state variables  $X_1, \dots, X_n$ :

- The first inequality says that for a series structure of associated components, an incorrect assumption of independence will lead to an *underestimation* of the system reliability.
- The second inequality says that for a parallel structure, an incorrect assumption of independence between the components will lead to an *overestimation* of the system reliability.

Since most systems are not purely series or purely parallel, we conclude that for an arbitrary structure, we *cannot say for certain what the consequences of an incorrect assumption of independence will be*.

Fortunately, it is still possible to obtain bounds on the system reliability.

## Bounds for the system reliability (cont.)

We skip the following results:

- Theorem 6.2.2 (Bounds on intersections of survival and failure events)
- Corollary 6.2.3 (Bounds on lifetime distributions of series and parallel systems)
- Theorem 6.2.4 (Very crude upper and lower bounds)
- Theorem 6.2.5 (We incorporate this result in Corollary 6.2.6)
- Theorem 6.2.7 (We incorporate this result in Corollary 6.2.8)

## Bounds for the system reliability (cont.)

### Corollary (6.2.6)

*Consider a monotone system  $(C, \phi)$ , where  $C = \{1, \dots, n\}$  and with minimal path sets  $P_1, \dots, P_p$  and minimal cut sets  $K_1, \dots, K_k$ .*

*Moreover, assume that the component state variables,  $X_1, \dots, X_n$  are associated with component reliabilities  $p_1, \dots, p_n$ . Then we have:*

$$\max_{1 \leq j \leq p} \prod_{i \in P_j} p_i \leq h \leq \min_{1 \leq j \leq k} \prod_{i \in K_j} p_i.$$

## Bounds for the system reliability (cont.)

PROOF: We have that:

$$\min_{i \in P_r} X_i \leq \max_{1 \leq r \leq p} \min_{i \in P_r} X_i = \phi(\mathbf{X}) = \min_{1 \leq s \leq k} \max_{i \in K_s} X_i \leq \max_{i \in K_s} X_i,$$

for all  $r = 1, \dots, p$  and all  $s = 1, \dots, k$ .

This implies that:

$$P(\min_{i \in P_r} X_i = 1) \leq h \leq P(\max_{i \in K_s} X_i = 1)$$

for all  $r = 1, \dots, p$  and all  $s = 1, \dots, k$ .

Hence, we must have:

$$\max_{1 \leq j \leq p} P[\min_{i \in P_j} X_i = 1] \leq h \leq \min_{1 \leq j \leq k} P[\max_{i \in K_j} X_i = 1].$$

## Bounds for the system reliability (cont.)

Furthermore, since  $X_1, \dots, X_n$  are associated, we may use Theorem 6.2.1 and get:

$$P[\min_{i \in P_j} X_i = 1] = E[\prod_{i \in P_j} X_i] \geq \prod_{i \in P_j} E[X_i] = \prod_{i \in P_j} p_i$$

$$P[\max_{i \in K_j} X_i = 1] = E[\prod_{i \in K_j} X_i] \leq \prod_{i \in K_j} E[X_i] = \prod_{i \in K_j} p_i$$

Inserting these inequalities into the bounds on the previous slide we get:

$$\max_{1 \leq j \leq p} \prod_{i \in P_j} p_i \leq h \leq \min_{1 \leq j \leq k} \prod_{i \in K_j} p_i.$$

## Bounds for the system reliability (cont.)

### Corollary (6.2.8)

Let  $(C, \phi)$  be a binary monotone system where  $C = \{1, \dots, n\}$ , and assume that the component state variables,  $X_1, \dots, X_n$  are independent with component reliabilities  $p_1, \dots, p_n$ .

Moreover, let  $P_1, \dots, P_p$  and  $K_1, \dots, K_k$  be respectively the minimal path and cut sets of the system.

Then we have:

$$\prod_{j=1}^k \prod_{i \in K_j} p_i \leq h(\mathbf{p}) \leq \prod_{j=1}^p \prod_{i \in P_j} p_i.$$

## Bounds for the system reliability (cont.)

PROOF: We introduce:

$$\rho_j(\mathbf{X}) = \prod_{i \in P_j} X_i, \quad j = 1, \dots, p,$$

$$\kappa_j(\mathbf{X}) = \prod_{i \in K_j} X_i, \quad j = 1, \dots, k.$$

Since  $\rho_1, \dots, \rho_p$  and  $\kappa_1, \dots, \kappa_k$  are non-decreasing functions of  $\mathbf{X}$ , they are associated. Hence, by Theorem 6.2.1 we have:

$$h(\mathbf{p}) = E\left[\prod_{j=1}^p \prod_{i \in P_j} X_i\right] = E\left[\prod_{j=1}^p \rho_j(\mathbf{X})\right] \leq \prod_{j=1}^p E[\rho_j(\mathbf{X})]$$

$$h(\mathbf{p}) = E\left[\prod_{j=1}^k \prod_{i \in K_j} X_i\right] = E\left[\prod_{j=1}^k \kappa_j(\mathbf{X})\right] \geq \prod_{j=1}^k E[\kappa_j(\mathbf{X})]$$

## Bounds for the system reliability (cont.)

Moreover, since the component state variables,  $X_1, \dots, X_n$ , are *independent*, we have:

$$E[\rho_j(\mathbf{X})] = E\left[\prod_{i \in P_j} X_i\right] = \prod_{i \in P_j} p_i,$$

$$E[\kappa_j(\mathbf{X})] = E\left[\prod_{i \in K_j} X_i\right] = \prod_{i \in K_j} p_i.$$

Inserting this into the bounds on the previous slide, i.e.:

$$\prod_{j=1}^k E[\kappa_j(\mathbf{X})] \leq h(\mathbf{p}) \leq \prod_{j=1}^p E[\rho_j(\mathbf{X})],$$

we get:

$$\prod_{j=1}^k \prod_{i \in K_j} p_i \leq h(\mathbf{p}) \leq \prod_{j=1}^p \prod_{i \in P_j} p_i.$$



## Bounds for the system reliability (cont.)

In the coming examples we shall compare the bounds from Corollary 6.2.6 to those from Corollary 6.2.8.

Let  $h_n(p)$  denote the reliability of a parallel system of  $n$  components where all components have the same reliability  $p$ . We then have:

$$\begin{aligned}h_2(p) &= p \text{ II } p = 1 - (1 - p)(1 - p) \\ &= 1 - (1 - 2p + p^2) = 2p - p^2,\end{aligned}$$

$$\begin{aligned}h_3(p) &= p \text{ II } p \text{ II } p = 1 - (1 - p)(1 - p)(1 - p) \\ &= 1 - (1 - 3p + 3p^2 - p^3) = 3p - 3p^2 + p^3.\end{aligned}$$

## Bounds for the system reliability (cont.)

EXAMPLE 1: A 3-out-of-4 system with  $p_i = p$ ,  $i = 1, 2, 3, 4$  where all the component state variables are independent.

The minimal path sets for the 3-out-of-4 system are:

$$P_1 = \{1, 2, 3\}, P_2 = \{1, 2, 4\}, P_3 = \{1, 3, 4\}, P_4 = \{2, 3, 4\},$$

and the minimal cut sets are:

$$K_1 = \{1, 2\}, K_2 = \{1, 3\}, K_3 = \{1, 4\}, K_4 = \{2, 3\}, K_5 = \{2, 4\}, K_6 = \{3, 4\}.$$

## Bounds for the system reliability (cont.)

The lower and upper bounds in Corollary 6.2.6 are denoted by  $l_1(p)$  and  $u_1(p)$  respectively, and are given by:

$$l_1(p) = \max_{1 \leq j \leq 4} \prod_{i \in P_j} p = \max_{1 \leq j \leq 4} p^3 = p^3,$$

$$u_1(p) = \min_{1 \leq j \leq 6} \prod_{i \in K_j} p = \min_{1 \leq j \leq 6} h_2(p) = 2p - p^2.$$

The lower and upper bounds in Corollary 6.2.8 are denoted by  $l_2(p)$  and  $u_2(p)$  respectively, and are given by:

$$l_2(p) = \prod_{j=1}^6 \prod_{i \in K_j} p = \prod_{j=1}^6 h_2(p) = (2p - p^2)^6,$$

$$u_2(p) = \prod_{j=1}^4 \prod_{i \in P_j} p = h_2(p^3) \Pi h_2(p^3) = 2(2p^3 - p^6) - (2p^3 - p^6)^2.$$

## Bounds for the system reliability (cont.)

The *true* reliability of the 3-out-of-4 system is given by:

$$h(p) = \sum_{i=3}^4 \binom{4}{i} p^i (1-p)^{4-i} = 4p^3(1-p) + p^4.$$

## Bounds for the system reliability (cont.)

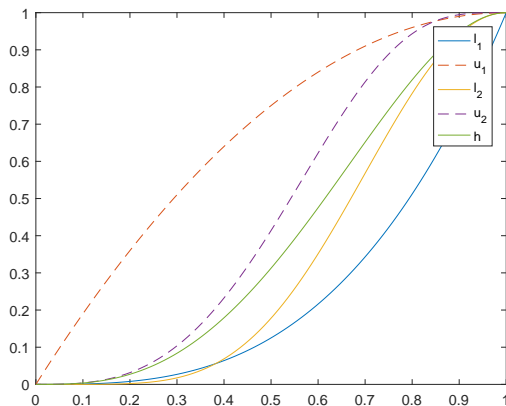


Figure: The true reliability function  $h$  as well as the bounds  $l_1$ ,  $u_1$ ,  $l_2$ ,  $u_2$ .

## Bounds for the system reliability (cont.)

EXAMPLE 2: A bridge system with  $p_i = p$ ,  $i = 1, 2, 3, 4, 5$  where all the component state variables are independent.

The minimal path sets for the bridge system are:

$$P_1 = \{1, 4\}, P_2 = \{1, 3, 5\}, P_3 = \{2, 3, 4\}, P_4 = \{2, 5\},$$

and the minimal cut sets are:

$$K_1 = \{1, 2\}, K_2 = \{1, 3, 5\}, K_3 = \{2, 3, 4\}, K_4 = \{4, 5\}.$$

## Bounds for the system reliability (cont.)

The lower and upper bounds in Corollary 6.2.6 are denoted by  $l_1(p)$  and  $u_1(p)$  respectively, and are given by:

$$l_1(p) = \max_{1 \leq j \leq 4} \prod_{i \in P_j} p = \max(p^2, p^3, p^3, p^2) = p^2,$$

$$u_1(p) = \min_{1 \leq j \leq 4} \prod_{i \in K_j} p = \min(h_2(p), h_3(p), h_3(p), h_2(p)) = 2p - p^2.$$

The lower and upper bounds in Corollary 6.2.8 are denoted by  $l_2(p)$  and  $u_2(p)$  respectively, and are given by:

$$l_2(p) = \prod_{j=1}^4 \prod_{i \in K_j} p = h_2(p)^2 \cdot h_3(p)^2,$$

$$u_2(p) = \prod_{j=1}^4 \prod_{i \in P_j} p = h_2(p^2) \amalg h_2(p^3).$$

## Bounds for the system reliability (cont.)

The *true* reliability of the bridge system is given by:

$$h(p) = p \cdot h_2(p)^2 + (1 - p) \cdot h_2(p^2).$$



## Bounds for the system reliability (cont.)

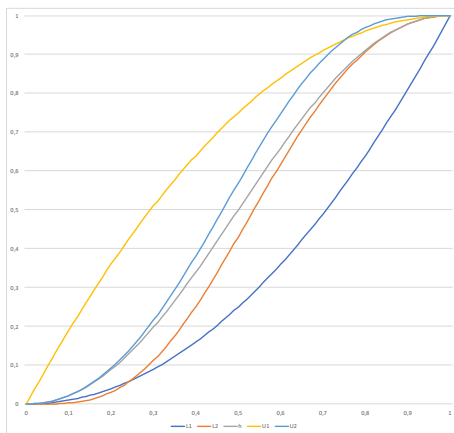


Figure: The true reliability function  $h$  as well as the bounds  $l_1$ ,  $u_1$ ,  $l_2$ ,  $u_2$ .

## Bounds for the system reliability (cont.)

We see that in both examples the bounds from Corollary 6.2.8 are better than those from Corollary 6.2.6 for *most* of the  $p$ -values.

NOTE:

- The lower bound  $l_1$  from Corollary 6.2.6 is better than  $l_2$  from Corollary 6.2.6 for small values of  $p$ .
- The upper bound  $u_1$  from Corollary 6.2.6 is better than  $u_2$  from Corollary 6.2.6 for large  $p$ -values.

In order to always get the best bounds, we may introduce  $l^*$  and  $u^*$  defined as follows:

$$l^* = \max(l_1, l_2),$$

$$u^* = \min(u_1, u_2)$$