

## **i Informasjon**

# **Exam IN1020 autumn 2022**

### **Time**

12th of December at 15:00-19:00

The lecturers will visit you some time after 16:00.

### **This examset**

This examset consists of 4 sections, whereas each section gives up to 25 points and hence the total would be 100 points for this examset.

Section 1 regards Digital representation and assembler code

Section 2 regards Hardware and computer architecture

Section 3 regards Security.

Section 4 regards Computer network

Notice that each section has to be passed in order to pass the whole exam.

### **The problems**

The problems are different variants of multiple choice questions. Some questions may have several correct answers, while others have only one. All will have at least one correct answer. You obtain points for each correct answer and lose points for wrong ones, but you will never get less than 0 points for any problem.

### **Permitted aids**

Any written or printed material.

A simple calculator without possibilities for communication.

A calculator is available in the Inspira system.

## **i Seksjon 1**

**You are now in section 1 - Digital representation and assembler code.**

The problem number 1.1, 1.2, 1.3, 1.4, 1.5, 1.6 and 1.7 are part of section 1.

## 1.1 HTML Fargekoder

HyperText Markup Language (HTML) is a standard markup language used to format content in web browsers. HTML can for example be used to display text in various colors. In HTML, color is represented with a red (R), green (G) and blue (B) value - termed RGB. These are usually given in hexadecimal notation, where the first byte (from the left) is red, the second byte is green and the third byte is blue.

Consider the color 0xA07CD1. What are the values for red, green and blue?



Select one or more alternatives:

- rød=148, grønn=128, blå=191
- rød=160, grønn=134, blå=179
- rød=148, grønn=124, blå=209
- rød=160, grønn=124, blå=209

---

Maximum marks: 1

## 1.2 2'er Komplement - variant 2

Consider the following two bytes:

Byte A:

0	1	0	0	1	1	0	0
---	---	---	---	---	---	---	---

Byte B:

0	1	0	1	0	0	0	1
---	---	---	---	---	---	---	---

Calculate a new byte C that is the sum of these ( $C = A + B$ ). What values can C have?

Select one or more alternatives:

- 126
- 157
- 99
- 67

---

Maximum marks: 3

## 1.3 Tallsystemer

Convert the following numbers to decimal (base 10) numbers.

- a)  $1101_2$   (51, 13, 23, 135, Ingen av disse)
- b)  $113_4$   (Ingen av disse, 23, 135, 51, 13)
- c)  $0x33$   (23, 51, 13, 135, Ingen av disse)
- d)  $207_8$   (23, Ingen av disse, 13, 135, 51)

---

Maximum marks: 5

## 1.4 Godt og Blandet

Check right or wrong for the following claims.

Please match the values:

	Riktig	Galt
A machine that is built on von neumann architecture has both code and data in the same memory.	<input type="radio"/>	<input type="radio"/>
DAT is a normal machine instruction that LMC understands.	<input type="radio"/>	<input type="radio"/>
One byte can represent a total of 512 unique values.	<input type="radio"/>	<input type="radio"/>
ASCII has room for 128 unique control- or character-symbols.	<input type="radio"/>	<input type="radio"/>
ASCII can easily be translated into UTF8 by setting the upper bit to zero.	<input type="radio"/>	<input type="radio"/>
Vector graphics is an appropriate format to store photos taken with a smart phone.	<input type="radio"/>	<input type="radio"/>
LMC has a total of three internal registers: the program counter, the instruction register and the accumulator.	<input type="radio"/>	<input type="radio"/>
LMC understands a total of 9 types of instructions.	<input type="radio"/>	<input type="radio"/>

Maximum marks: 5

## 1.5 LMC-1

```

      INP
      STA a
      INP
      BRZ print
      LDA a
      SUB b
      STA a
print  LDA a
      OTC
      HLT
a      DAT
b      DAT 32
```

When running this code, what will be printed when the user provides the following input data: **114** and **999**?

Select one or more alternatives:

- r
- q
- R
- T
- 999

---

Maximum marks: 3

## 1.6 LMC-2

```

                INP
                STA a
                INP
                STA b
loop           LDA a
                INSTRUKSJON 1
                INSTRUKSJON 2
                INSTRUKSJON 3
                INSTRUKSJON 4
                LDA a
                SUB en
                STA a
                BRA loop
slutt         LDA res
                OUT
                HLT
res           DAT 0
a             DAT
b             DAT
en           DAT 1

```

You are making a small program to multiply two numbers **a** and **b**, such that

$res = a * b$

You have written the program above, but some instructions are missing. Which ones?

Instruksjon 1:

Select alternative ▼ (BRA slutt, BRZ slutt, BRP slutt)

Instruksjon 2:

Select alternative ▼ (LDA b, LDA a, LDA res, STA a)

Instruksjon 3:

Select alternative ▼ (ADD en, ADD b, ADD res, ADD a)

Instruksjon 4:

Select alternative ▼ (STA b, Ingen instruksjon, STA a, STA res)

Maximum marks: 5

## 1.7 LMC-3

start	INP	00	INP
	BRZ slutt	01	BRZ 13
	STA in	02	STA 27
	LDA laster	03	LDA 28
	ADD in	04	ADD 27
	STA loop	05	STA 06
loop	HLT	06	HLT
	BRZ start	07	BRZ 00
	OTC	08	OTC
	LDA loop	09	LDA 06
	ADD en	10	ADD 26
	STA loop	11	STA 06
	BRA loop	12	BRA 06
slutt	HLT	13	HLT
lmc	DAT 76 // L	14	DAT 76
	DAT 77 // M	15	DAT 77
	DAT 67 // C	16	DAT 67
	DAT 0 // NULL	17	DAT 00
jul	DAT 74 // J	18	DAT 74
	DAT 117 // u	19	DAT 117
	DAT 108 // l	20	DAT 108
	DAT 0 // NULL	21	DAT 00
ifi	DAT 73 // I	22	DAT 73
	DAT 70 // F	23	DAT 70
	DAT 73 // I	24	DAT 73
	DAT 0 // NULL	25	DAT 00
en	DAT 1	26	DAT 01
in	DAT	27	DAT 00
laster	LDA 0	28	LDA 00

The code above writes out one and one character from a provided address until a "zero" is read from memory.

After providing the input "14", the user inputs "18" and then "0". What text is printed?

Select alternative  ("LMC", "Jul", and nothing else., "IFI", "Jul", and nothing else., The program crashes., "IFI" and nothing else.)

What machine-code will we find on the label **loop** after the sixth instruction has been fully executed?


Select alternative  (300, 514, 500, 914, 906, 518)

Maximum marks: 3

**i Seksjon 2**

You are now in section 2 - Hardware and computer architecture.

The problem number 2.1, 2.2, 2.3, 2.4, 2.5 and 2.6 are part of section 2.

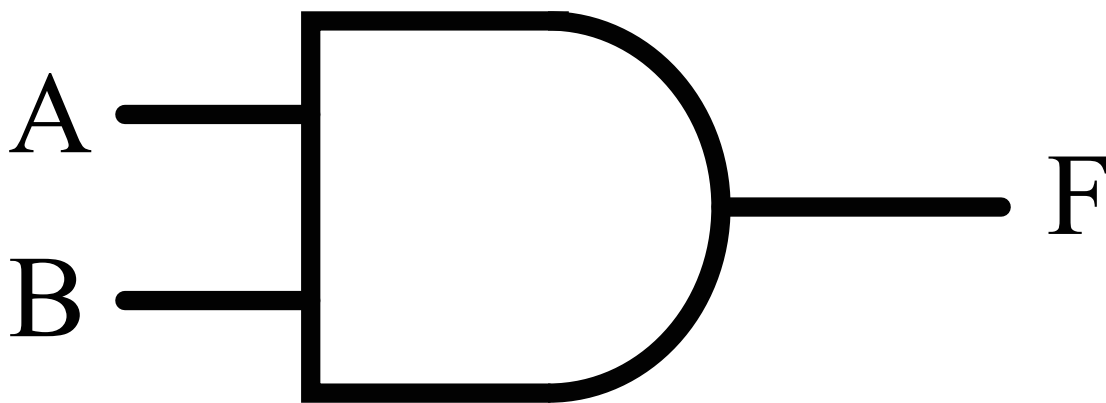**2.1 Gates**

Which gate(s) is /are on the above figure:

**Select one or more alternatives:**


- NOR-gate
- XOR-gate
- AND-gate
- XNOR-gate
- NAND-gate
- OR-gate
- NOT-gate

---

Maximum marks: 1



## 2.2 Kretsanalyse

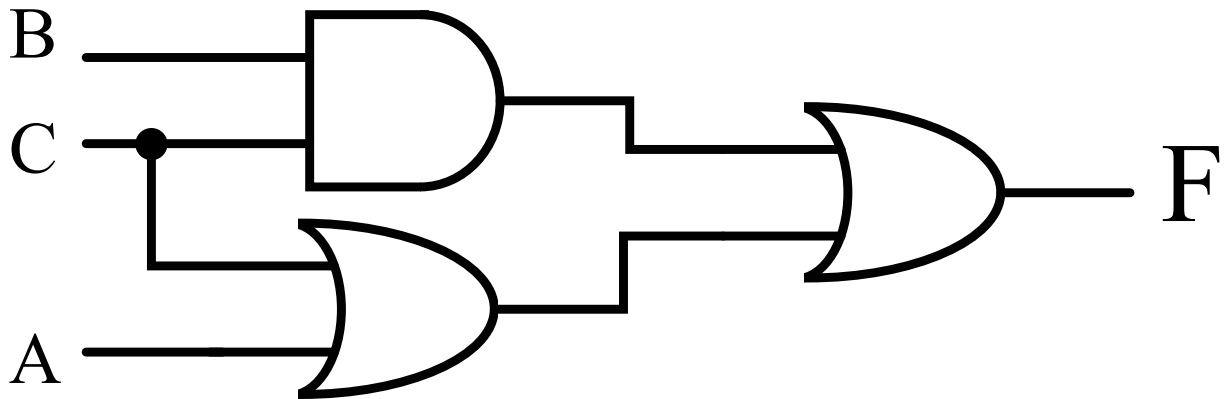

The function  $F$  is given by:

Select one or more alternatives:

- $F = A + B$
- $F = C + A$
- $F = C + AB$
- $F = B + AC$
- $F = A + C$
- $F = B + C$
- $F = ABC$
- $F = AC$
- $F = A + BC$
- $F = A + B + C$
- $F = AB$
- $F = BC$

---

Maximum marks: 5

## 2.3 Cache

Assume that there are 3000 instructions left and that one instruction takes 1 clock cycle, except for any cache misses. Furthermore, you can assume that there will be 50% cache miss where it will take a total of 4 clock cycles for each instruction in cache miss.

What is the total time required?

**Select one or more alternatives:**

- 13250
- 8250
- 10000
- 9000
- 6600
- 5000
- 15000
- 5500
- 7500
- 3000

---

Maximum marks: 3

## 2.4 Godt og blandet H2022

Please match the values:

	True	False
Transistor is a collection of current that makes 1 byte	<input type="radio"/>	<input type="radio"/>
Secondary memory is volatile memory	<input type="radio"/>	<input type="radio"/>
The ALU is situated right outside of the CPU	<input type="radio"/>	<input type="radio"/>
Cache-miss is when a part of the memory is broken	<input type="radio"/>	<input type="radio"/>
A register contains of many RAMs	<input type="radio"/>	<input type="radio"/>
A databus (BUS) transports information between the processor and other units	<input type="radio"/>	<input type="radio"/>
The technological evolution contributes to the fact that there will be less transistors on a chip	<input type="radio"/>	<input type="radio"/>
A full-adder can be used as a subtractor by adding a 1 to the carry-in	<input type="radio"/>	<input type="radio"/>
The clock-signal in a CPU is stored in RAM	<input type="radio"/>	<input type="radio"/>
A 64-bits ALU needs 65 elements of a 1-bit ALU	<input type="radio"/>	<input type="radio"/>

Maximum marks: 8

## 2.5 Pensum H2022

Which of these topics below are part of this years curriculum? Drag-and-drop the topics inn to the representative grey areas. It is possible to put the topics on top of each other.

Ikke del av pensum  
Not part of curriculum

Med i årets pensum  
Within this years curriculum

Cache XOR Transistor

RAM CPU BUS Decoder

Karnaugh diagram ALU Multiplexor

Styresignal

---

Maximum marks: 3

## 2.6 Abstraksjonsnivå H2022

Place these elements in the correct order in regards to the abstraction level.

Highest level:  (STA 04, Transistor, Pipeline, Register)

(STA 04, Pipeline, Transistor, Register)

(Pipeline, Transistor, STA04, Register)

Lowest level:  (STA 04, Transistor, Register, Pipeline)

---

Maximum marks: 5

## i Seksjon 3

You are now in section 3 - Security.

The problem number 3.1, 3.2, 3.3, 3.4, 3.5, 3.6 and 3.7 are part of section 3.

### 3.1 Sikkerhetsmål

Security services are essential in information security. Which of the following is defined as a security service:

**Select one or more alternatives:**

- Integrity
- Worm
- Authorization
- Firewall
- Non-repudiation
- Access control
- Availability
- Two-factor authentication

---

Maximum marks: 2

### 3.2 Sikkerhetstiltak: Konfidensialitet

Confidentiality is an essential requirement in Norwegian Privacy Act. Which of the following security services will ensure the confidentiality of personal data processed in an IT system:

**Select one or more alternatives:**

- Identify all the users of the IT system
- Use of cryptography for data stored in the system
- Use of perimeter defense
- Provide a backup of your hardware
- Provide a backup of your data
- Provide for redundant services.

---

Maximum marks: 2

### 3.3 Sikkerhetstiltak: Integritet

Integrity is an essential requirement in Norwegian Privacy Act. Which of the following security services will ensure the integrity of personal data processed in an IT system:

**Select one or more alternatives:**

- Provide for redundant services.
- Keep all software well security updated
- Have good routines for access control in the IT-system
- Encrypt all network traffic to, from and internally in the computer system.
- Ensure a backup copy of all the hardware
- Identify all the users of the IT system

---

Maximum marks: 2

### 3.4 Autentisering

How can two-factor authentication with a combination of the authentication factors *Something you know* and *Something you have* for logging in help improve the security of an IT system?

**Select one or more alternatives:**

- This makes it unnecessary to further secure data stored in the IT system.
- It makes it more difficult for attackers to exploit user information leaked in e.g. phishing attacks.
- It makes it difficult to succeed with so-called brute-force attacks.
- It restricts what users are permitted to do in an IT system.

---

Maximum marks: 3



### 3.5 Symmetrisk kryptering

Symmetric encryption is one of several categories of encryption used in computer-based cryptography.

**Which of the following statements about symmetric encryption are true and which are false?**

	True	False
Is used for encryption of secret messages.	<input type="radio"/>	<input type="radio"/>
The sender and the receiver share one secret cryptographic key.	<input type="radio"/>	<input type="radio"/>
Is used for so-called digital signature.	<input type="radio"/>	<input type="radio"/>
Can be used to ensure data confidentiality.	<input type="radio"/>	<input type="radio"/>
Safe exchange of the secret cryptographic key is a common security challenge.	<input type="radio"/>	<input type="radio"/>
Is based on the use of a pair of cryptographic keys known as a public and a private key.	<input type="radio"/>	<input type="radio"/>
Symmetric encryption destroys the message so that it can never be decrypted.	<input type="radio"/>	<input type="radio"/>
Can be used to ensure non-repudiation.	<input type="radio"/>	<input type="radio"/>

Maximum marks: 4

### 3.6 Asymmetrisk kryptering

The company where you are employed has the need for strong security and authenticity for data and messages, and has introduced a separate, local public-key infrastructure (PKI). All employees have been assigned a cryptographic key pair, consisting of a private and a public key. Since you have passed the course IN1020, it will be your task to explain to your colleagues which keys are to be used for which operations.

**For each operation below enter the correct key:**

Key sender uses for signing (digital signature):  (The recipient's public key, The sender's public key, The recipient's private key, The sender's private key).

Key recipient uses for validation (digital signature):  (The sender's public key, The recipient's public key, The sender's private key, The recipient's private key)

Key sender uses for encryption (secret message exchange):  (The recipient's private key, The sender's public key, The recipient's public key, The sender's private key)

Key recipient uses for decryption (exchange of secret message):   
(The sender's public key, The sender's private key, The recipient's private key, The recipient's public key)

---

Maximum marks: 3

### 3.7 Personvern og trusselmodellering

Viken County Council plans to introduce a new digital system for conducting and examining final written exams for upper secondary school students.

One of the solutions they are considering is a cloud service from an external IT provider, available to students, examiners and the school administration as a web application. Both the storage of data and the execution of the application take place on the supplier's computer equipment which is physically located in an EU country, while the exam itself is carried out in a browser on the schools' computers on the school's premises.

The examination system have to contain enough information to uniquely identify students and examiners (social security number, name, candidate id), the students' examination answers, as well as the examination justification and grade for each individual exam answer the examiners give.

#### Task A)

The county council have to assess requirements for *personal data protection* (GDPR), and you are going to help them on their way. Consider the following statements, and mark the correct ones based on the use of an examination system as described above:

#### Select one or more alternatives:

- The county council is not legally responsible for information about pupils being processed in accordance with the Personal Data Act, as the examination system in its entirety is provided by an external company.
- The Personal Data Act sets requirements for information security; Confidentiality, integrity and availability.
- The county council can disregard the Personal Data Act for the processing of personal data, since it is absolutely necessary to process data about students in order to complete the exam.
- Students have the right to gain insight in the personal data stored about them.

#### Task B)

The county council's next concern is the *integrity* of the data stored and processed in the examination system. That e.g. exam answers or grades are changed by unauthorized persons. Which of the following might be a threat to integrity, given the information above:

**Select one or more alternatives:**

- Lack of redundant services.
- Poor information security expertise at the company that supplies the exam solution.
- Man-in-the-middle attacks* on network traffic.
- Rootkit* installed on an exam examiner's computer.
- Unavailability attacks from outsiders with malicious intent.
- Use of passwords as the only authentication factor.

---

Maximum marks: 9

**i Seksjon 4**

You are now in section 4 - Computer network.

The problem number 4.1, 4.2, 4.3, 4.4, 4.5, 4.6, 4.7, 4.8 and 4.9 are part of section 4.

**4.1 Klient-tjener**

What characterises the access model client-server?

**Select one or more alternatives:**

- A server listens for requests and delivers a service when a request is received.
- A client initiates the exchange by connecting to a server and request a service.
- The nodes can function both as clients and servers.
- There is no centralized control over the service.
- Many independent nodes cooperate to deliver a service.

---

Maximum marks: 2

## 4.2 Linjeswitching

What is true for a circuit-switched network?

**Select one or more alternatives:**

- Capacity has to be reserved along the entire path.
- Different packets can take different paths from sender to receiver.
- A dedicated connection is established between the sender and receiver.
- Data for transmission is split into smaller parts that are sent independently in the network.

---

Maximum marks: 2

## 4.3 Overføringshastighet

You want to download a 150 megabyte file, and the bandwidth on your Internet connection is 50 megabit per second down and 20 megabit per second up. What is the theoretical transfer time?

**Select one alternative:**

- 24 seconds
- 150 seconds
- 60 seconds
- 7,5 seconds
- 3 seconds

---

Maximum marks: 3

#### 4.4 Punktnotasjon til CIDR

A computer has the IP-address: 172.16.100.18

The netmask is: 255.255.255.248

What is the IP-address to the machine written in CIDR notation?

**Select one alternative:**

- 172.16.100.18/29
- 172.16.100.1/26
- 172.16.100.1/29
- 172.16.100.18/26

---

Maximum marks: 3

#### 4.5 Antall IP-adresser

A subnet as the network mask 11111111.11111111.11111111.11111000

How many valid IP-addresses can be allocated to hosts in the subnet?

**Select one alternative:**

- 256
- 6
- 32
- 30
- 8

---

Maximum marks: 2

## 4.6 Broadcast-adresse

You have a machine with the following IP-address written in CIDR-notation: 172.16.10.112/26

What is the broadcast-address in this subnet?

**Select one alternative:**

- 172.16.1.255
- 172.16.10.127
- 172.16.10.64
- 172.16.10.1
- 172.16.10.255
- 172.16.10.63

---

Maximum marks: 5

## 4.7 IPv6

What is the primary motivation for upgrading from IPv4 to IPv6?

**Select one alternative:**

- Easier to connect IP-addresses and MAC-addresses.
- Makes it harder to do a "man-in-the-middle" attack.
- More ports will be available per IP-address.
- Increase the number of globally addressable IP-addresses.

---

Maximum marks: 2

## 4.8 Transportlagsprotokoller

The transport layer in the TPC/IP stack contains mainly two protocols: TCP and UDP.

**Which of the following statements about protocols in the transport layer are true and which are false?**

	False	True
Congestion Control makes sure that the capacity in the network is shared on all connections.	<input type="radio"/>	<input type="radio"/>
TCP is the most used of the two protocols in the transport layer.	<input type="radio"/>	<input type="radio"/>
TCP is a connection-oriented protocol.	<input type="radio"/>	<input type="radio"/>
It is not possible to use encryption on the application layer when UDP is used.	<input type="radio"/>	<input type="radio"/>
UDP is a lightweight protocol and is therefore well suited to transfer large files.	<input type="radio"/>	<input type="radio"/>
Both TCP and UPD makes sure that data is delivered in-order.	<input type="radio"/>	<input type="radio"/>
The transport layer only works on end-to-end and has no knowledge on how data is transmitted over the network.	<input type="radio"/>	<input type="radio"/>
Flow control makes sure that TCP does not transmit data faster than capacity in the network.	<input type="radio"/>	<input type="radio"/>

Maximum marks: 4



## 4.9 HTTP-streaming

Which statements are correct with regards to streaming over HTTP?

**Select one or more alternatives:**

- With HTTP-streaming you must buffer the entire video before playback can start.
- Streaming over HTTP only uses UDP to transfer the video.
- It is the client that descides which qualirt layer to download, not the server.
- Video is divided in small segments and different quality layers.

---

Maximum marks: 2