
INF 5300 – Flexible shape extraction

Anne Solberg (anne@ifi.uio.no)

Next two lectures:

- Example: finding the border of the left ventricle
- Deformable templates
- Snakes
- Active shape models

Snakes 15.02.12

INF 5300

1

Example – segmenting ultrasound images of the hearth




Find the border of the left ventricle

- 3D object with a closed border
- 2D views have partly discontinuous border
- Noisy image

INF 5300

2

Can previous segmentation methods work?

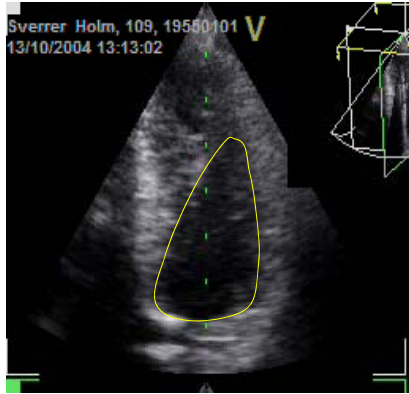

- Thresholding?
- Hit and miss?
- Region growing?
- Edge-based segmentation?
- Watershed?
- Line detection?
- Hough transform?
 - Ellipse?
 - Can be extended to general shapes if the precise mathematical description of the shape is known.

INF 5300

3

Motivation

- Common assumption for many segmentation methods:
 - Digital images will show real world objects as well-defined regions with unique gray levels and a clear border against a uniform background.
 - There are many applications where this assumption does not hold.
 - Textured images.
 - Noisy images (ultrasound, SAR (synthetic aperture radar)) images.
 - Images with partly occluded borders
 - » 2D images of 3D objects

INF 5300

4

Motivation



Beware of extreme case of blending and occlusion

INF 5300

5

Motivation

- We have seen several cases where such knowledge is used:
 - Thresholding: knowledge about distribution of gray levels can be used.
 - Adaptive thresholding: Window size should be determined in relation to the size of the objects we want to find.
 - Character recognition: size (and shape) of the typical characters useful for both segmentation and feature extraction.
 - Hough transform: a precise model for the shape is used.

INF 5300

6

Motivation

1. The images we will look at now are just another example of segmentation methods using models external to the image in order to obtain the best possible segmentation.
2. A typical application where these methods are useful is segmentation of medical ultrasound images
 - Much noise and blurred edges
 - Much knowledge about the shape of the objects.

INF 5300

7

Introduction to deformable templates and energy functions


- Consider detection of the eye.
- An eye template consists a circle (the pupil) inside a closed contour of two parabolas.

- Parabola:

$$y = a - \frac{a}{b^2}x^2$$

- Find the values of the parameters $\{c_p, a, b, c, c_c, r\}$ that best fits the image, in the sense that they maximize an energy function

$$\sum_{(x,y) \in \text{circle.perimeter, parabola.perimeter}} E_{x,y}$$



INF 5300

8

Introduction to deformable templates

- First, define an **edge energy**. The sum is over all edge points that are either on the parabolas or on the circle, and normalized by the nof. points on the contour.

$$E_e = \frac{\sum_{(x,y) \in \text{circle.perimeter}} E_{x,y}}{\text{circle.perimeter}} + \frac{\sum_{(x,y) \in \text{parabola.perimeter}} E_{x,y}}{\text{parabola.perimeter}}$$

- Assume also that the iris is darker than the sclera (the white area). Let $P_{x,y}$ be the gray levels.
- Consider **backscatter energy for the iris**:

$$E_v = -\frac{\sum_{(x,y) \in \text{circle}} P_{x,y}}{\text{circle.area}}$$

- Since the iris is dark, a minus sign is used to create a function that has large values for pixels with small gray levels.
- For the **white regions**, we compute the average pixels value of pixels inside the parabola, but outside the circle:

$$E_p = \frac{\sum_{(x,y) \in \text{parabola-circle}} P_{x,y}}{\text{parabola.area} - \text{circle.area}}$$

INF 5300

9

Combining the energy functions:

- Combine the three terms into:

$$E = c_e E_e + c_v E_v + c_p E_p$$

- c_p , c_v , and c_e are weights that influence the weighting of the different energy terms.
- Parameters to estimate: 8 shape parameters, 3 weights
 - How do we optimize all 11 parameters?
 - Suboptimal solutions can be found using genetic algorithms, but simpler models with fewer parameters are more popular.

INF 5300

10

The initial idea: Snakes


- An active contour (snake) is a set of points which aims to enclose a target feature.
- Snakes are model-based methods for localization and tracking of image structures.
- The snake is defined as an energy minimizing contour (often defined using splines).
- The energy of the snake depends on its shape and location within the image.
- Snakes are attracted to image boundaries through forces.

INF 5300

11

The initial idea: Snakes

- Goal: find a closed contour that defines the boundary of the object of interest
- Location of the boundary: It should be located either at a texture edge or intensity edge.
- Shape of the boundary: It should be reasonably smooth without sharp bends

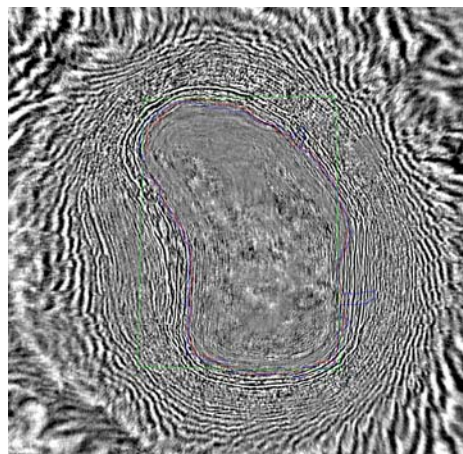

INF 5300

12

The initial idea: Snakes

- The approach is iterative:
 1. The user draws an initial approximate contour.
 2. A dynamic simulation is started.
 3. The contour is deformed until it reaches equilibrium.
- Snakes depend on:
 - Interaction with the user
 - Interaction with a high-level description.
 - Interaction with image data adjacent in space and time.

The initial idea: Snakes

- The energy of the snakes is affected by different types of forces:
 1. **Internal forces – The shape of the snake:**
 - Tension/**elasticity** forces that make the snake act like a membrane.
 - Rigidity forces that make the snake act like a thin plate that resists **bending**.
 2. **Image forces – How well the shape fit texture or intensity borders.**
 3. **Constraint forces**
 - User-supplied forces that come from higher-level image understanding processes.

Representation of the contour


- The contour is represented as a vector of coordinates:
$$v(s) = (x(s), y(s))^T$$
- This is a parametric representation of the contour.
- The vector describing the position of every point on the contour makes one pass over the entire contour as s varies from its minimum to its maximum value.
- Typically, s is normalized
$$s \in [0, 1]$$
- **We only need coordinates $(x(s), y(s))$ of the points on the contour, not a mathematical equation for the contour.**

INF 5300

15

What is a parametric contour?

- Let $x(s) = \cos(2\pi s)$ and $y(s) = \sin(2\pi s)$
- Let $s \in [0, 1]$
- Then $v(s)$ describes a circle as s varies from 0 to 1.



- See also contour representation in INF 4300
- With snakes, we do not need the mathematical formula for the contour, we just need a start contour and rules on how the contour can change locally.

INF 5300

16

Energy functions

- Finding the contour is described as an energy minimization problem.
- The energy function consists of several terms:
 - The snakes own properties (bending, stretching)
 - Image energy (edge magnitude along the snake)
 - Constraints making the contour smooth etc.
- The energy function is also called a functional.
- The final position of the contour will correspond to a minimum of this energy function.
- Typically, the energy function is minimized in a iterative algorithm.

INF 5300

17

The energy function

$$E_{snake} = \int_{s=0}^1 E_{int}(v(s)) + E_{image}(v(s)) + E_{con}(v(s)) ds$$

Internal deformation energy
of the snake itself.
How it can bend and stretch.

A term that relates to gray
levels in the image, e.g.
attracts the snake to points
with high gradient magnitude.

Constraints on the shape of the
snake. Encourages the contour
to be smooth.

- The minimum values is found by derivation:

$$\frac{dE_{snake}}{dv} = 0$$

INF 5300

18

The internal deformation term

$$E_{\text{int}} = \alpha(s) \left| \frac{dv(s)}{ds} \right|^2 + \beta(s) \left| \frac{d^2v(s)}{ds^2} \right|^2$$

First derivative

Measures how stretched the contour is.
 Keyword: point spacing/elastic energy.
 Imposes tension.
 The curve should be short if possible.
 Analogy: v acts like a rubber band that can stretch.

Second derivative

Measures the curvature or bending energy.
 Keyword: point variation.
 Imposes rigidity.
 Changes in direction should be smooth.
 Physical analogy: v acts like a thin plate.

- α and β are parameters that control the weight of the two terms.
- Low α values: the snake can stretch much.
- Low β values: the snake can have high curvature.

INF 5300

19

The image term of E

- Attracts the snake to features in the image, like edge pixels or bright pixels.
- Originally, it consisted of a term for lines, edges (and maybe also terminations):

$$E_{\text{image}} = w_{\text{line}} E_{\text{line}} + w_{\text{edge}} E_{\text{edge}} + w_{\text{term}} E_{\text{term}}$$

- w_{line} , w_{edge} , and w_{term} are weights that control the influence of each term.
- E_{line} can be set to image intensity values. If w_{line} is positive, it will attract the snake to dark regions, and to bright regions if w_{line} is negative.
- E_{edge} can be computed using an edge detector.
- E_{term} is not commonly used.
- In general, E_{image} is an integral over the curve (we will later discretize the curve)

$$E_{\text{image}} = \int_0^1 P(v(s)) ds$$

INF 5300

20

The image term

$$E_{image} = \int_0^1 P(v(s)) ds$$

- $P(v(s))$ denotes a scalar potential function defined on the image plane.
- We are minimizing the energy function.
- We choose $P(x,y)$ in such a way that it coincides with special features in the image, e.g. bright or dark areas, or edges.
- If $I(x,y)$ is the intensity for point (x,y) , what kind of structure does this function attract the snake to?

$$P(x,y) = -I(x,y)$$

INF 5300


21

The image term

- A common way of defining $P(x,y)$ is:

$$P(x,y) = -c |\nabla(G_\sigma * I(x,y))|$$

- c is a constant, ∇G_σ is a gradient operator, and $I(x,y)$ the input image. Note the minus sign as the gradient is high for edges.




- If we are looking for e.g. a texture edge, the input image should be a texture feature image that results in a high gradient.

INF 5300

22

A texture example

- Test yourself: what kind of texture feature could you apply to this image before inputting to a snake algorithm?
- Hint: the desired boundary should be related to high gradient.

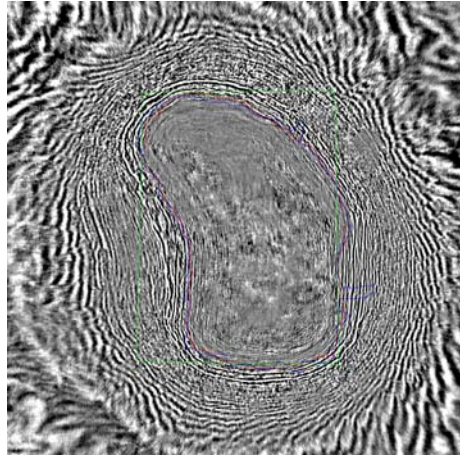

Snakes

INF 5300

23

The energy function

- Simple snake with only two terms (no termination energy):

$$\begin{aligned} E_{snake}(s) &= E_{int}(v_s) + E_{image}(v_s) \\ &= \alpha \left| \frac{dv_s}{ds} \right|^2 + \beta \left| \frac{d^2v_s}{ds^2} \right|^2 + \gamma E_{edge} \end{aligned}$$

- We need to approximate both the first derivative and the second derivative of v_s , and specify how E_{edge} will be computed.
- The snake is initialized from a starting position, e.g. a circle with given center and radius.
- How should the snake iterate from its initial position?

INF 5300

24


How do we implement this?

- The energy function involves finding the new location of S new coordinates (x_s, y_s) , $0 \leq s \leq 1$ for one iteration.
- Which algorithm can we use to find the new coordinate locations?
 1. Greedy algorithm
 - Simple, suboptimal, easier to understand
 2. Complete Kass algorithm
 - Optimizes all points on the contour simultaneously by solving a set of differential equations.
- These two algorithms will now be presented.

INF 5300

25

The greedy algorithm for snakes

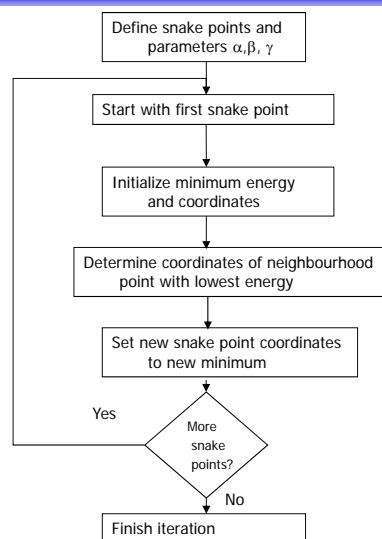

INF 5300

26

Coordinates of the initial contour

- The starting point of the snake is the initial contour. It can e.g. be *no* (number of points) on a circle with radius *rad*:

```

points(rad,no,xc,yc) := for s ∈ 0..no-1
    x_s ← xc + floor( rad*cos( (s*2*π)/no ) + 0.5 )
    y_s ← yc + floor( rad*sin( (s*2*π)/no ) + 0.5 )
    α_s ← 0.5
    β_s ← 0.5
    γ_s ← 1
    point_s ← [ x_s
                y_s
                α_s
                β_s
                γ_s ]
point
    
```

Code 6.1 Specifying an initial contour

INF 5300

27

Approximating the first derivative of v_s

Consider a local point s on the curve.

Average distance
between points
on the contour

Distance between
this point and the
next point

$$\begin{aligned}
 \left| \frac{dv_s}{ds} \right|^2 &= \left| \sum_{i=0}^{s-1} \|v_i - v_{i+1}\| / S - \|v_s - v_{s+1}\| \right|^2 \\
 &= \left| \sum_{i=0}^{s-1} \sqrt{(x_i - x_{i+1})^2 + (y_i - y_{i+1})^2} / S - \sqrt{(x_s - x_{s+1})^2 + (y_s - y_{s+1})^2} \right|^2
 \end{aligned}$$

INF 5300

28

Approximating the second derivative of v_s

Why is this correct?
INF 2310 – Konvolusjon og ikke-lineære filtere (1.3.2011)
Hint: Check the derivation
of the 2D Laplace operator

$$\left| \frac{d^2 v_s}{ds^2} \right|^2 = |(v_{s+1} - 2v_s + v_{s-1})|^2$$
$$= (x_{s+1} - 2x_s + x_{s-1})^2 + (y_{s+1} - 2y_s - y_{s-1})^2$$

INF 5300

29

Computing E_{edge}

- E_{edge} can be implemented as the magnitude of the Sobel operator at point (x,y) .
- The energy should be minimized, so we invert the edge image (maximizing a function f is equivalent to minimizing $-f$). (Alternatively we use a negative value of α)
- Normalize all energy terms so that they have an output in the interval $[0,1]$.

INF 5300

30

The full greedy algorithm

```

grdy(edg,con) := for s1e0..rows(con)
                 s←mod(s1,rows(con))
                 xmin←(cons)0
                 ymin←(cons)1
                 forces←balance[(cons)0,(cons)1,edg,s,con]
                 Emin←(cons)2.Econt(xmin,ymin,s,con)
                 Emin←Emin+(cons)3.Ecur(xmin,ymin,s,con)
                 Emin←Emin+(cons)4·(edg0)(cons)1,:(cons)0
                 for x∈(cons)0-1..(cons)0+1
                   for y∈(cons)1-1..(cons)1+1
                     if check(x,y,edg0)
                       xx←x-(cons)0+1
                       yy←y-(cons)1+1
                       Ej←(cons)2·(forces0,0)yy,xx
                       Ej←Ej+(cons)3·(forces0,1)yy,xx
                       Ej←Ej+(cons)4·(edg0)y,x
                       if Ej<Emin
                         Emin←Ej
                         xmin←x
                         ymin←y
                 cons←
                 [ xmin
                   ymin
                   (cons)2
                   (cons)3
                   (cons)4 ]
con

```

INF 5300

31

Comments on the greedy algorithm

- A threshold on the number of changes done in a single iteration can be used to avoid oscillations between two contours with very similar energy.
- If $\alpha=0$, contour points can have very different spacing.
- If $\beta=0$, points with high curvature can be allowed (this can be allowed locally if β varies with s).
- If $\gamma=0$, we ignore the image and the position of the contour can be far from the real edge in the image.

INF 5300

32

From the greedy algorithm to a full snake

- The greedy algorithm only finds the minimum energy for one point (x,y) on the snake at the time, and only points that are neighbors of current snake points are checked at a given iteration.
- A full algorithm should minimize the energy for all snake points $v_s, s=1,S$.

INF 5300

33

The complete snake - derivation

- Assume that we seek an iterative solution.
- Assume that we have one solution

$$\hat{v}(s) = (\hat{x}(s), \hat{y}(s))$$

- If this solution is perturbed slightly by $\varepsilon\delta v(s)$, the solution that has minimum energy must satisfy:

$$\frac{dE_{snake}(\hat{v}(s) + \varepsilon\delta v(s))}{d\varepsilon} = 0$$

The new solution should be a minimum, so the derivative must be 0.

- The slight spatial perturbation is defined as $\delta v(s) = (\delta_x(s), \delta_y(s))$.
- The perturbed snake solution is:

$$\hat{v}(s) + \varepsilon\delta v(s) = (\hat{x}(s) + \varepsilon\delta_x(s), \hat{y}(s) + \varepsilon\delta_y(s))$$

INF 5300

34

- The snake equation is:

$$E_{snake} = \int_{s=0}^1 E_{int}(v(s)) + E_{edge}(v(s)) ds$$

- With a slight perturbation:

$$E_{snake}(\hat{v}(s) + \varepsilon \delta v(s)) = \int_{s=0}^1 E_{int}(\hat{v}(s) + \varepsilon \delta v(s)) + E_{edge}(\hat{v}(s) + \varepsilon \delta v(s)) ds$$

Insert the perturbed solution

- Insert the values derived for E_{int} and E_{edge} :

$$E_{snake}(\hat{v}(s) + \varepsilon \delta v(s)) = \int_{s=0}^1 \left\{ \alpha(s) \left| \frac{d(\hat{v}(s) + \varepsilon \delta v(s))}{ds} \right|^2 + \beta(s) \left| \frac{d^2(\hat{v}(s) + \varepsilon \delta v(s))}{ds^2} \right|^2 + E_{edge}(\hat{v}(s) + \varepsilon \delta v(s)) \right\} ds$$

INF 5300

35

- Separate into $x(s)$ and $y(s)$:

$$E_{snake}(\hat{v}(s) + \varepsilon \delta v(s)) = \int_{s=0}^1 \left\{ \alpha(s) \left[\left(\frac{d\hat{x}(s)}{ds} \right)^2 + 2\varepsilon \frac{d\hat{x}(s)}{ds} \frac{d\delta_x(s)}{ds} + \left(\varepsilon \frac{d\delta_x(s)}{ds} \right)^2 \right] + \left(\frac{d\hat{y}(s)}{ds} \right)^2 + 2\varepsilon \frac{d\hat{y}(s)}{ds} \frac{d\delta_y(s)}{ds} + \left(\varepsilon \frac{d\delta_y(s)}{ds} \right)^2 \right\} + \beta(s) \left\{ \left(\frac{d^2\hat{x}(s)}{ds^2} \right)^2 + 2\varepsilon \frac{d^2\hat{x}(s)}{ds^2} \frac{d^2\delta_x(s)}{ds^2} + \left(\varepsilon \frac{d^2\delta_x(s)}{ds^2} \right)^2 + \left(\frac{d^2\hat{y}(s)}{ds^2} \right)^2 + 2\varepsilon \frac{d^2\hat{y}(s)}{ds^2} \frac{d^2\delta_y(s)}{ds^2} + \left(\varepsilon \frac{d^2\delta_y(s)}{ds^2} \right)^2 \right\} + E_{edge}(\hat{v}(s) + \varepsilon \delta v(s)) \right\} ds$$

INF 5300

36

- Use Taylor series expansion on E_{edge} :

$$\begin{aligned}
 E_{\text{edge}}(\hat{v}(s) + \varepsilon \delta v(s)) &= E_{\text{edge}}(\hat{x}(s) + \varepsilon \delta_x(s), \hat{y}(s) + \varepsilon \delta_y(s)) \\
 &= E_{\text{edge}}(\hat{x}(s), \hat{y}(s)) + \varepsilon \delta_x(s) \frac{\partial E_{\text{edge}}}{\partial x} \Big|_{\hat{x}, \hat{y}} + \varepsilon \delta_y(s) \frac{\partial E_{\text{edge}}}{\partial y} \Big|_{\hat{x}, \hat{y}} + O(\varepsilon^2)
 \end{aligned}$$

- E_{edge} must be twice differentiable, which holds for edge information.

Taylor expansion of $f(x+h)=f(x)+hf'(x)+h^2/2f''(x)+\dots$
 If ε is small, ε^2 can be neglected.

INF 5300

37

- Since ε is small, ignore all second order terms in ε and reformulate E_{snake} :

$$\begin{aligned}
 E_{\text{snake}}(\hat{v}(s) + \varepsilon \delta v(s)) &= E_{\text{snake}}(\hat{v}(s)) \\
 &+ 2\varepsilon \int_{s=0}^1 \alpha(s) \frac{d\hat{x}(s)}{ds} \frac{d\delta_x(s)}{ds} + \beta(s) \frac{d^2\hat{x}(s)}{ds^2} \frac{d^2\delta_x(s)}{ds^2} + \frac{\delta_x(s)}{2} \frac{\partial E_{\text{edge}}}{\partial x} \Big|_{\hat{x}, \hat{y}} ds \\
 &+ 2\varepsilon \int_{s=0}^1 \alpha(s) \frac{d\hat{y}(s)}{ds} \frac{d\delta_y(s)}{ds} + \beta(s) \frac{d^2\hat{y}(s)}{ds^2} \frac{d^2\delta_y(s)}{ds^2} + \frac{\delta_y(s)}{2} \frac{\partial E_{\text{edge}}}{\partial y} \Big|_{\hat{x}, \hat{y}} ds
 \end{aligned}$$

INF 5300

38

- Since $\hat{v}(s)$ is a valid solution, it must be a local minimum and the two integral terms must be zero:

$$\int_{s=0}^1 \alpha(s) \frac{d\hat{x}(s)}{ds} \frac{d\delta_x(s)}{ds} + \beta(s) \frac{d^2\hat{x}(s)}{ds^2} \frac{d^2\delta_x(s)}{ds^2} + \frac{\delta_x(s)}{2} \frac{\partial E_{edge}}{\partial x} \Big|_{\hat{x}, \hat{y}} ds = 0$$

$$\int_{s=0}^1 \alpha(s) \frac{d\hat{y}(s)}{ds} \frac{d\delta_y(s)}{ds} + \beta(s) \frac{d^2\hat{y}(s)}{ds^2} \frac{d^2\delta_y(s)}{ds^2} + \frac{\delta_y(s)}{2} \frac{\partial E_{edge}}{\partial y} \Big|_{\hat{x}, \hat{y}} ds = 0$$

To solve this integral, use the rule for partial integration

$$\int f(x)G(x)dx = F(x)G(x) - \int F(x)g(x)dx$$

with

$$G(x) = \alpha(s) \frac{d\hat{x}(s)}{ds} \quad \text{and} \quad f(x) = \frac{d\delta_x(s)}{ds}$$

- By integration we get:

$$\left[\alpha(s) \frac{d\hat{x}(s)}{ds} \delta_x(s) \right]_{s=0}^1 - \int_{s=0}^1 \frac{d}{ds} \left\{ \alpha(s) \frac{d\hat{x}(s)}{ds} \right\} \delta_x(s) ds$$

$$\left[\beta(s) \frac{d^2\hat{x}(s)}{ds^2} \delta_x(s) \right]_{s=0}^1 - \left[\frac{d}{ds} \left\{ \beta(s) \frac{d^2\hat{x}(s)}{ds^2} \right\} \delta_x(s) \right]_{s=0}^1$$

$$+ \int_{s=0}^1 \frac{d^2}{ds^2} \left\{ \beta(s) \frac{d^2\hat{x}(s)}{ds^2} \right\} \delta_x(s) ds + \frac{1}{2} \int_{s=0}^1 \frac{\partial E_{edge}}{\partial x} \Big|_{\hat{x}, \hat{y}} \delta_x(s) ds = 0$$

- As s goes from 0 to 1, we traverse one full contour and end up at precisely the same point. Thus $\delta_x(1) - \delta_x(0) = 0$ and $\delta_y(1) - \delta_y(0) = 0$.
- Because of this, the first, third and fourth term is zero.

- So we get:

$$\int_{s=0}^1 \left\{ -\frac{d}{ds} \left\{ \alpha(s) \frac{d\hat{x}(s)}{ds} \right\} + \frac{d^2}{ds^2} \left\{ \beta(s) \frac{d^2 \hat{x}(s)}{ds^2} \right\} + \frac{1}{2} \int_{s=0}^1 \frac{\partial E_{edge}}{\partial x} \Big|_{x,y} \right\} \delta_x(s) ds = 0$$

- Because this must be true for all $\delta_x(s)$ the term within the outer {} must be zero:

$$-\frac{d}{ds} \left\{ \alpha(s) \frac{d\hat{x}(s)}{ds} \right\} + \frac{d^2}{ds^2} \left\{ \beta(s) \frac{d^2 \hat{x}(s)}{ds^2} \right\} + \frac{1}{2} \int_{s=0}^1 \frac{\partial E_{edge}}{\partial x} \Big|_{x,y} = 0$$

- A similar derivation can be done for $y(s)$. Thus, we have a pair of differential equations.
- A complete snake must solve these two equations.

Solving the differential equations

- So, we have two differential equations.
- We approximate the first order derivatives: $dx(s)/ds \cong x_{s+1} - x_s$
- And the second order derivatives:
 $d^2x(s)/ds^2 \cong x_{s+1} - 2x_s + x_{s-1}$
- We discretize the contour into S ($s=1, \dots, S$) points with spacing h :

$$\begin{aligned} & -\frac{1}{h} \left\{ \alpha_{s+1} \frac{x_{s+1} - x_s}{h} - \alpha_s \frac{x_s - x_{s-1}}{h} \right\} \\ & + \frac{1}{h^2} \left\{ \beta_{s+1} \frac{x_{s+2} - 2x_{s+1} + x_s}{h^2} - 2\beta_s \frac{x_{s+1} - 2x_s + x_{s-1}}{h^2} + \beta_{s-1} \frac{x_s - 2x_{s-1} + x_{s-2}}{h^2} \right\} \\ & + \frac{1}{2} \frac{\partial E_{edge}}{\partial x} \Big|_{x_s, y_s} \end{aligned}$$

- We can write this on the form

$$f_s = a_s x_{s-2} + b_s x_{s-1} + c_s x_s + d_s x_{s+1} + e_s x_{s+2}$$

where

$$f_s = -\frac{1}{2} \frac{\partial E_{edge}}{\partial x} \Big|_{x_s, y_s} \quad a_s = \frac{\beta_{s-1}}{h^4} \quad b_s = -\frac{2(\beta_s + \beta_{s-1})}{h^4} - \frac{\alpha_s}{h^2}$$

$$c_s = \frac{\beta_{s+1} + 4\beta_s + \beta_{s-1}}{h^4} + \frac{\alpha_{s+1} + \alpha_s}{h^2} \quad d_s = -\frac{2(\beta_{s+1} + \beta_s)}{h^4} - \frac{\alpha_{s+1}}{h^2} \quad e_s = \frac{\beta_{s+1}}{h^4}$$

- This is also a matrix equation: $Ax = f_x(x, y)$ where $f_x(x, y)$ is the first order differential edge magnitude along the x-axis and

$$A = \begin{bmatrix} c_1 & d_1 & e_1 & 0 & \dots & a_1 & b_1 \\ b_2 & c_2 & d_2 & e_2 & 0 & \dots & a_2 \\ a_3 & b_3 & c_3 & d_3 & e_3 & 0 & \\ \vdots & \vdots & \vdots & \vdots & \vdots & \vdots & \vdots \\ e_{s-1} & 0 & \dots & a_{s-1} & b_{s-1} & c_{s-1} & d_{s-1} \\ d_s & e_s & 0 & \dots & a_s & b_s & c_s \end{bmatrix}$$

INF 5300

43

- The equivalent holds for $y(s)$. So we have two equations

$$Ax = f_x(x, y)$$

$$Ay = f_y(x, y)$$

- These means that the snake energy should be balanced by the edge energy.
- We need an iterative approach to get a solution that is globally optimal (one single iteration by computing A^{-1} gives a local optimal solution).
- An iterative solution must have snake points that depend on time, a snake that can move.
- Let $x^{<i>}, y^{<i>}$ denote the solution at time i .

INF 5300

44

Manipulating the equation

- We have:

$$Ax^{<i>}</i> - f_x(x^{<i>}, y^{<i>}) = 0$$

$$Ay^{<i>}</i> - f_y(x^{<i>}, y^{<i>}) = 0$$

- To solve these equations, set them equal to a small step size λ times the negative time derivatives of the coordinates (also assume for simplicity that f_x and f_y are constant during one time step):

$$Ax^{<i+1>}</i+1> - f_x(x^{<i>}, y^{<i>}) = -\lambda(x^{<i+1>}</i+1> - x^{<i>}</i>)$$

$$Ay^{<i+1>}</i+1> - f_y(x^{<i>}, y^{<i>}) = -\lambda(y^{<i+1>}</i+1> - y^{<i>}</i>)$$

- If the solution is at an equilibrium, the right hand side will equal 0 and the original equation be fulfilled.
- Rewrite this as:

$$(A + \lambda I)x^{<i+1>}</i+1> = f_x(x^{<i>}, y^{<i>}) + \lambda x^{<i>}</i>$$

$$(A + \lambda I)y^{<i+1>}</i+1> = f_y(x^{<i>}, y^{<i>}) + \lambda y^{<i>}</i>$$

INF 5300

45

$$(A + \lambda I)x^{<i+1>}</i+1> = f_x(x^{<i>}, y^{<i>}) + \lambda x^{<i>}</i>$$

$$(A + \lambda I)y^{<i+1>}</i+1> = f_y(x^{<i>}, y^{<i>}) + \lambda y^{<i>}</i>$$

⇕

$$x^{<i+1>}</i+1> = (A + \lambda I)^{-1}(\lambda x^{<i>}</i> + f_x(x^{<i>}, y^{<i>}))$$

$$y^{<i+1>}</i+1> = (A + \lambda I)^{-1}(\lambda y^{<i>}</i> + f_y(x^{<i>}, y^{<i>}))$$

- The matrix $A + \lambda I$ is pentadiagonal banded and can be inverted fast using LU-decomposition.
- A whole set of contour points is found for each solution.

INF 5300

46