Group Seminar Week 2: Homogeneous Transform

Tony Nguyen

- Responsible for correcting the mandatory assignment
 - Backup Group-teacher

Email: *hpnguyen@ifi.uio.no*

Session's plan

- Brief talk on mandatory assignments

- A short example on homogeneous transform

- Walkthrough on weekly exercise 2.10-2.11, 2.38.

Delivery


• Start early on the assignments, each task becomes solvable for each lecture

 All assignments must be "PASSED" in order to take exam

Devilry -

- Postponing the delivery, send an e-mail to one of us
 - Preferably early and couple of days beforehand

Delivering the assignment

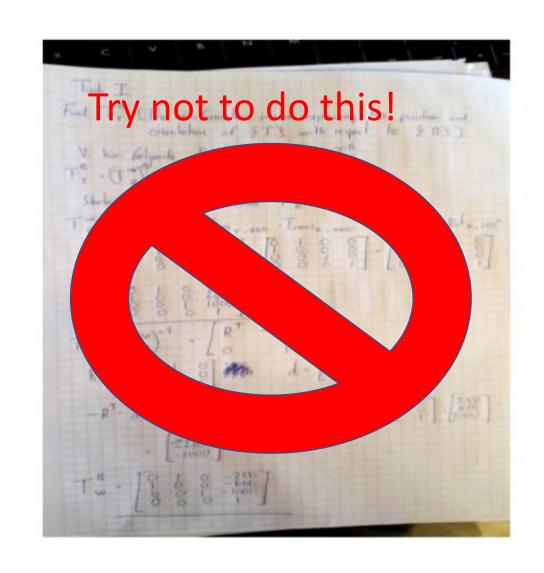

Do one of these two methods:

Task I:

Task 1a) → Løst i matlab, se vedlegg

Task 1b) → Løst i matlab-filene, se vedlegg

Task 1c) - Use the functions to show how you can verify that the inverse and forward kinematics are correctly derived.

Ved å først ta å beregne DH-matrisene for hele robot-manipulatoren, så utledes forward kinematic og inverse kinematic. Men dette ble gjort i forrige oblig og jeg antar og forutsetter at det fremdeles samme manipulator og ingen endringer i linkene slik at forward –og inverse kinematic er det samme

Ved å bruke de kartetiske punktene og vinklene fra forrige oblig, altså:

skal man få punktet ovenfor

Disse punktene kommer i fra forrige oblig.

Task II:

a١

Word

Vi har følgende matriser til forward kinematics som er:

$$A_1 = \begin{bmatrix} C_1 & 0 & -S_1 & 0 \\ S_1 & 0 & C_1 & 0 \\ 0 & -1 & 0 & L_1 \\ 0 & 0 & 0 & 1 \end{bmatrix} \qquad A_2 = \begin{bmatrix} C_2 & -S_2 & 0 & L_2C_2 \\ S_2 & C_2 & 0 & L_2S_2 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} \qquad A_3 = \begin{bmatrix} C_3 & -S_3 & 0 & L_2C_3 \\ S_3 & C_3 & 0 & L_2S_3 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix}$$

$$T_1^0 = A_1$$

Hpnguyen

$$T_2^0 = T_1^0 * T_2^1 = A_1 * A_2 = \begin{bmatrix} C_2 & -S_2 & 0 & L_2C_2 \\ S_2 & C_2 & 0 & L_2S_2 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} * \begin{bmatrix} C_3 & -S_3 & 0 & L_3C_2 \\ S_3 & C_3 & 0 & L_3S_2 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix}$$

$$=\begin{bmatrix} C_2C_1 & -S_2C_1 & -S_1 & L_2C_2C_1\\ S_1C_2 & -S_2S_1 & C_1 & L_2C_2S_1\\ -S_2 & -C_2 & 0 & L_1-L_2S_2\\ 0 & 0 & 0 & 1 \end{bmatrix}$$

Page 2

1 Rotation and Translation

A rotation matrix is a matrix that is used to perform a rotation in euclidean space. In 3 dimensional space a basic rotation is a rotation about one of the axes of a coordinate system. As such we can perform a single rotation θ along one of three different axis which are following x,y,z in the respective coordinate frame.

Rotation matrix for rotation around x-axis with θ degree and observe that x-axis every axis are perpendicular with one another. This is equal for all of the rotation matrices.

$$Rot_{x,\theta} = \begin{bmatrix} 1 & 0 & 0\\ 0 & \cos\theta & \sin\theta\\ 0 & -\sin\theta & \cos\theta \end{bmatrix} \tag{1}$$

Rotation matrix for rotation around y-axis with θ degree

$$Rot_{y,\theta} = \begin{bmatrix} \cos\theta & 0 & -\sin\theta \\ 0 & 1 & 0 \\ \sin\theta & 0 & \cos\theta \end{bmatrix}$$
 (2)

Rotation matrix for rotation around z-axis with θ degree

$$Rot_{z,\theta} = \begin{bmatrix} \cos \theta & \sin \theta & 0 \\ -\sin \theta & \cos \theta & 0 \\ 0 & 0 & 1 \end{bmatrix}$$

$$(3)$$

Translation matrix is a very useful matrix because its linearity allows for selective translation in 3d in either one, two or all of the three of axis'. For example, if we only want translation along z-axis we can extract only the rotation matrix, a 3x3 diagonal matrix in the translation matrix (4) and setting the t_x and t_y to 0 and only replace t_z with the designated translation.

$$Trans_{x} = \begin{bmatrix} 1 & 0 & 0 & t_{x} \\ 0 & 1 & 0 & t_{y} \\ 0 & 0 & 1 & t_{z} \\ 0 & 0 & 0 & 1 \end{bmatrix}$$
 (4)

Combining the rotation and translation matrices we can then

$$A_i = (5)$$

 A_i is represented as a product of four basic transformations and it is known as Denavit Hartenberg parameters.

$$A_i^{i-1} = Rot_{z,\theta}Trans_{z,d}Trans_{x,a}Rot_{x,\alpha} =$$
 (6)

$$\begin{bmatrix} \cos \theta & \sin \theta & 0 \\ -\sin \theta & \cos \theta & 0 \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 1 & d_i \\ 0 & 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} 1 & 0 & 0 & a_x \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} 1 & 0 & 0 \\ 0 & \cos \theta & \sin \theta \\ 0 & -\sin \theta & \cos \theta \end{bmatrix}$$
(7)

LaTeX

LaTeX


- Download on your personal laptops
- Use Overleaf.com → I highly recommend this

Question to you guys:

- Raise your hand if you want me to put out a simple template on LaTeX on the course page.

Word

• Intuitively simple to use, but can be tedious on long equations.

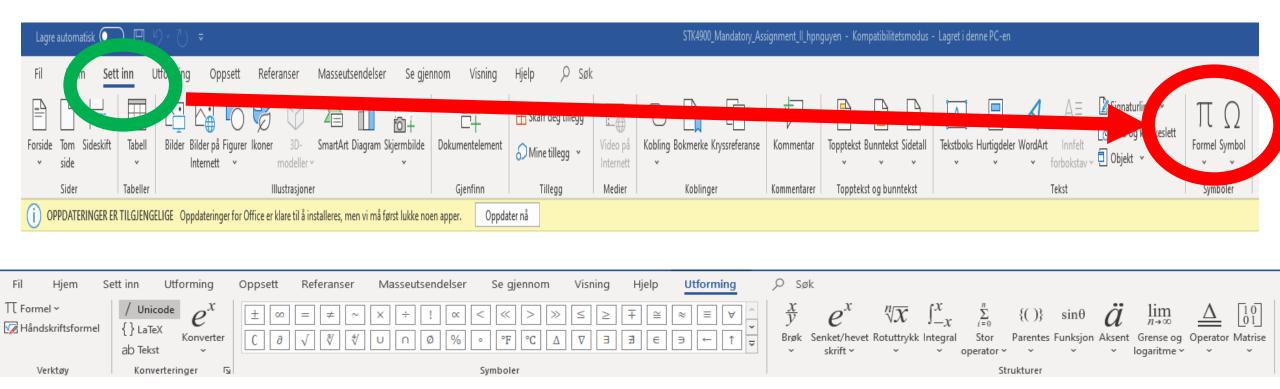


Raise your hand if you want me to put out a simple template on Word on the course-page or type in chat if you guys want me to create a template






Before Scan

After Scan

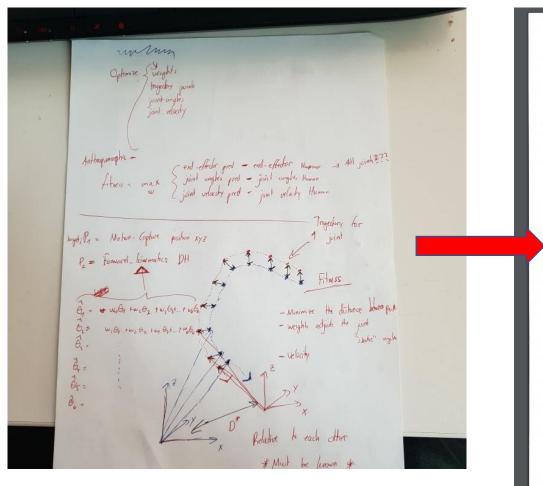

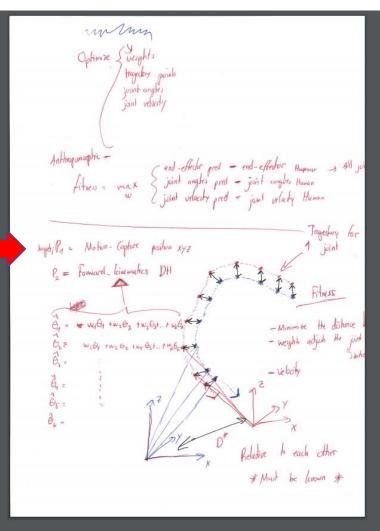

Programming Code:

```
import numpy as np
                  """This Function solves x+y+z and returns it
• Don't
                     params: x = x-coordinates
                             y = y-coordinates
                            z = z-coordinates
                  .....
Write
                                                                                                            ing
                  def function1(x,y,z):
                      return x+y*z
  similai
                  """This Function counts how many pancakes there are if there exists some on the moon and
  Examp
                     returns the amount.
                     params: cool param1 = boolean value, if there are pancakes at the moment
                                                                                                             and
                             cool param2 = How many pancakes on the moon at the moment
etc..."
• You <u>M</u>
                  def foo(cool param1, cool param2):
                      if cool param1:
                         return cool param2
                      return cool_param1
```

Homogeneous Transform


Represents position and orientation of rigid-body relative to another frame

$$H = \begin{bmatrix} R & d \\ 0 & 1 \end{bmatrix}, R is rotation matrix (3x3), d is translation vector (1x3)$$


$$R_x(heta) = egin{bmatrix} 1 & 0 & 0 \ 0 & \cos heta & -\sin heta \ 0 & \sin heta & \cos heta \end{bmatrix}$$


$$R_y(heta) = egin{bmatrix} \cos heta & 0 & \sin heta \ 0 & 1 & 0 \ -\sin heta & 0 & \cos heta \end{bmatrix}$$

$$R_z(heta) = egin{bmatrix} \cos heta & -\sin heta & 0 \ \sin heta & \cos heta & 0 \ 0 & 0 & 1 \end{bmatrix}$$

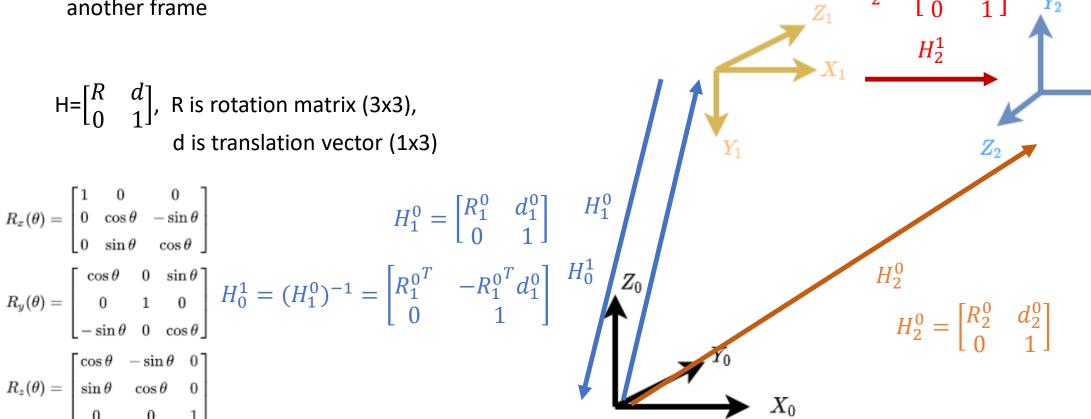


Homogeneous Transform Cont.

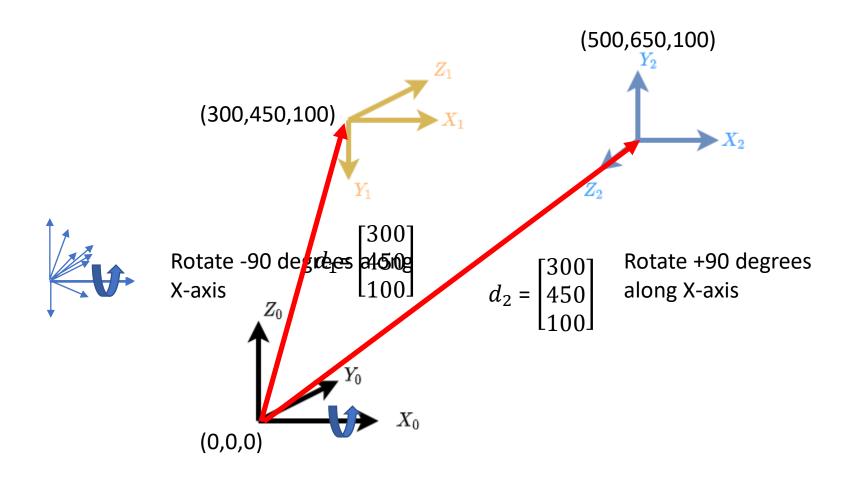




Robot Coordinate Frame

- A robot performs task in its own coordinate frame.
- The next lecture will focus on modeling a robotic manipulator using forward-kinematics

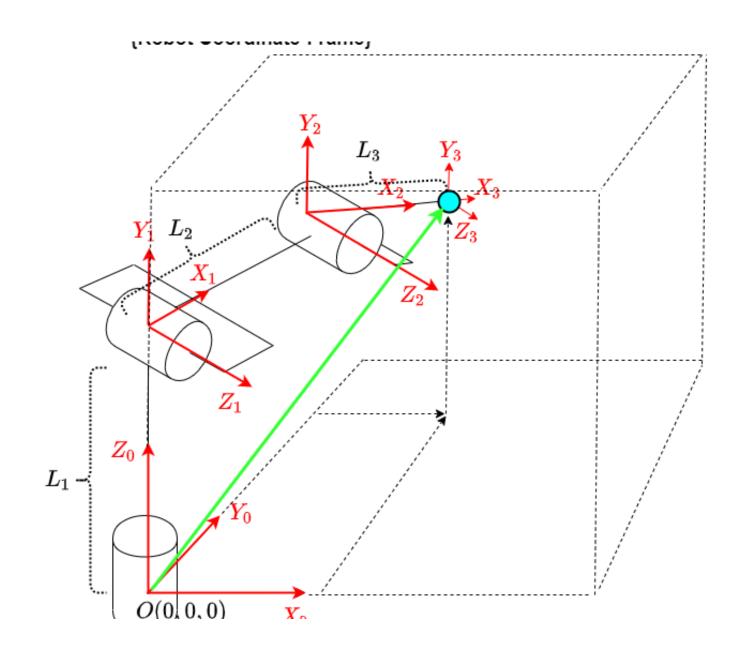


Two coordinate frames

• A robot is placed on another coordinate frame. Let's call this world coordinate frame.

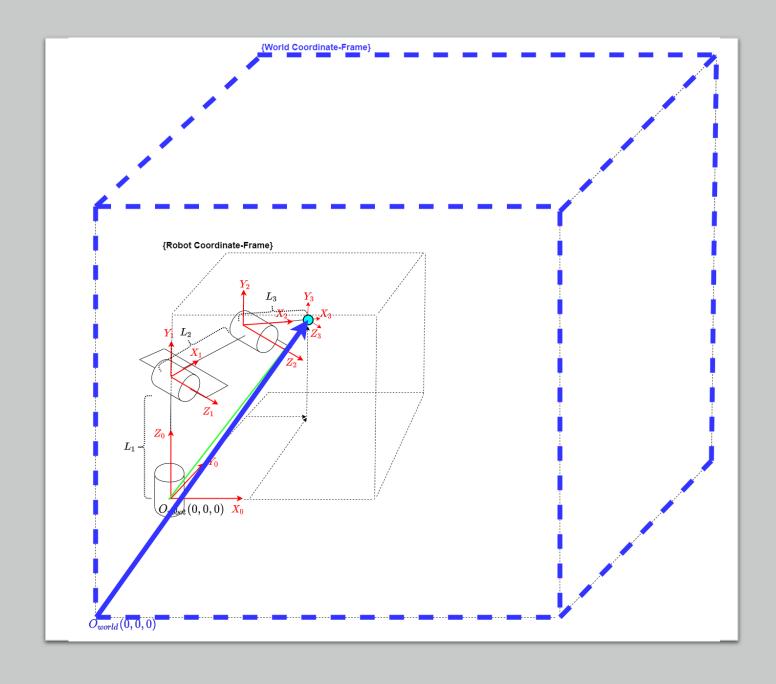

Three Coordinate frames

- With homogeneous transforms we can represent the points amongst the coordinate frames

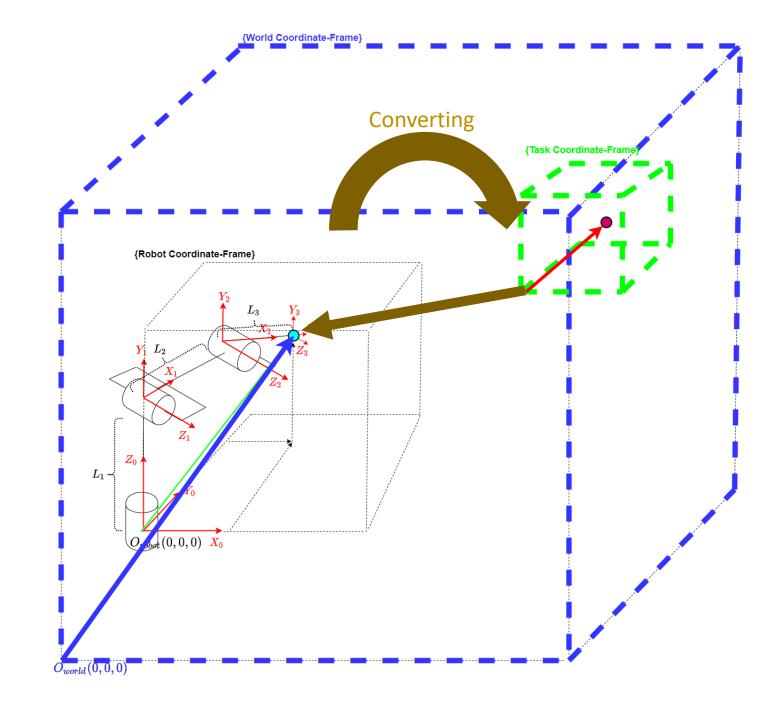

• R =
$$R_{y,\phi} R_{x,\phi} R_{z,\theta}$$

• Fixed, premultiply

Current, post-multiply

• Read 2.4.3 for a more detailed explanation

• R =
$$R_{z,\Theta} R_{x,\Phi} R_{x,\Psi}$$

• Fixed, premultiply

Current, post-multiply

• Read 2.4.3 for a more detailed explanation


Find H_1^0 , H_2^0 , H_2^1

 $H = \begin{bmatrix} R & d \\ 0 & 1 \end{bmatrix}, R is rotation matrix (3x3), d is translation vector (1x3)$

$$R_x(\theta) = egin{bmatrix} 1 & 0 & 0 \ 0 & \cos \theta & -\sin \theta \ 0 & \sin \theta & \cos \theta \end{bmatrix}$$

$$R_y(\theta) = \begin{bmatrix} \cos \theta & 0 & \sin \theta \\ 0 & 1 & 0 \\ -\sin \theta & 0 & \cos \theta \end{bmatrix}$$

$$R_z(heta) = egin{bmatrix} \cos heta & -\sin heta & 0 \ \sin heta & \cos heta & 0 \ 0 & 0 & 1 \end{bmatrix}$$

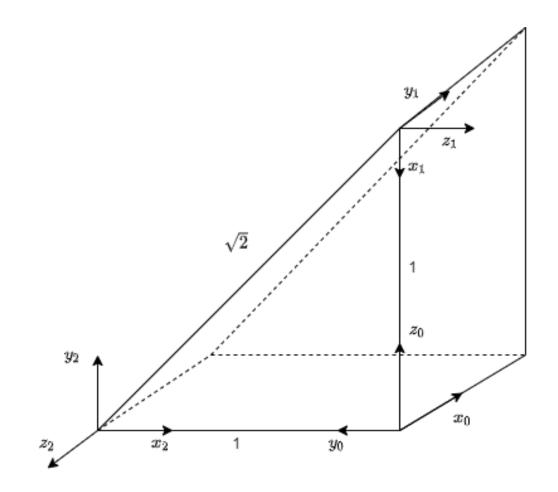


Let us start by finding the H_1^0

$$R = R_{x,90} R_{z,270} (R_{z,-90})$$

 $t = [0 \ 0 \ 1]$

$$R_x(heta) = egin{bmatrix} 1 & 0 & 0 \ 0 & \cos heta & -\sin heta \ 0 & \sin heta & \cos heta \end{bmatrix} \qquad R_z(heta) = egin{bmatrix} \cos heta & -\sin heta & 0 \ \sin heta & \cos heta & 0 \ 0 & 0 & 1 \end{bmatrix}$$

$$H_1^0 = \begin{bmatrix} R_{x,90} R_{z,270} & t \\ 0 & 1 \end{bmatrix} = \begin{bmatrix} r_{11} & r_{12} & r_{13} & 0 \\ r_{21} & r_{22} & r_{23} & 0 \\ r_{31} & r_{32} & r_{33} & 1 \\ 0 & 0 & 0 & 1 \end{bmatrix}$$

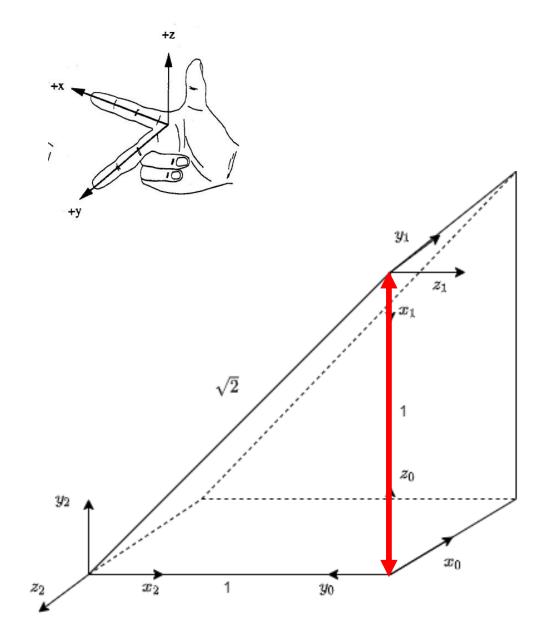


Finding the H_2^0

$$R = R_{y,270} R_{x,270} \qquad (R_{y,-90} R_{x,-90})$$

 $t = [0 \ 1 \ 0]$

$$R_x(\theta) = \begin{bmatrix} 1 & 0 & 0 \\ 0 & \cos \theta & -\sin \theta \\ 0 & \sin \theta & \cos \theta \end{bmatrix} \qquad R_y(\theta) = \begin{bmatrix} \cos \theta & 0 & \sin \theta \\ 0 & 1 & 0 \\ -\sin \theta & 0 & \cos \theta \end{bmatrix}$$

$$H_2^0 = \begin{bmatrix} R_{y,270} & R_{x,270} & t \\ 0 & 1 \end{bmatrix} = \begin{bmatrix} r_{11} & r_{12} & r_{13} & 0 \\ r_{21} & r_{22} & r_{23} & 1 \\ r_{31} & r_{32} & r_{33} & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix}$$

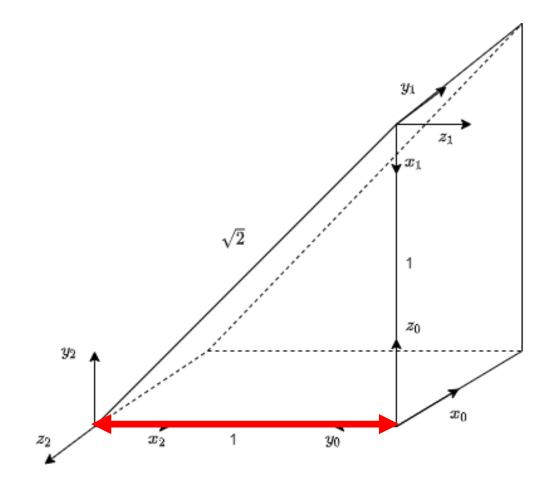

Finding the H_2^1


$$R = R_{z,90} R_{y,-90}$$

 $(R_{z,-270}R_{y,270})$

$$t = [1 \ 0 \ -1]$$

$$R_z(heta) = egin{bmatrix} \cos heta & -\sin heta & 0 \ \sin heta & \cos heta & 0 \ 0 & 0 & 1 \end{bmatrix} \qquad R_y(heta) = egin{bmatrix} \cos heta & 0 & \sin heta \ 0 & 1 & 0 \ -\sin heta & 0 & \cos heta \end{bmatrix}$$


$$H_2^1 = \begin{bmatrix} R_{z,90} & R_{y,-90} & t \\ 0 & 1 \end{bmatrix} = \begin{bmatrix} r_{11} & r_{12} & r_{13} & 1 \\ r_{21} & r_{22} & r_{23} & 0 \\ r_{31} & r_{32} & r_{33} & -1 \\ 0 & 0 & 0 & 1 \end{bmatrix}$$

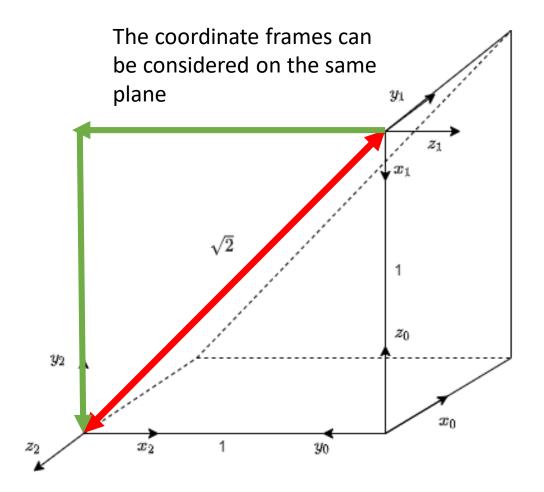

Show that $H_2^0 = H_1^0 H_2^1$


$$H_1^0 = \begin{bmatrix} R_{x,90} R_{z,270} & t \\ 0 & 1 \end{bmatrix} = \begin{bmatrix} r_{11} & r_{12} & r_{13} & 0 \\ r_{21} & r_{22} & r_{23} & 0 \\ r_{31} & r_{32} & r_{33} & 1 \\ 0 & 0 & 0 & 1 \end{bmatrix}$$

$$H_2^1 = \begin{bmatrix} R_{z,90} & R_{y,-90} & t \\ 0 & 1 \end{bmatrix} = \begin{bmatrix} r_{11} & r_{12} & r_{13} & 1 \\ r_{21} & r_{22} & r_{23} & 0 \\ r_{31} & r_{32} & r_{33} & -1 \\ 0 & 0 & 0 & 1 \end{bmatrix}$$

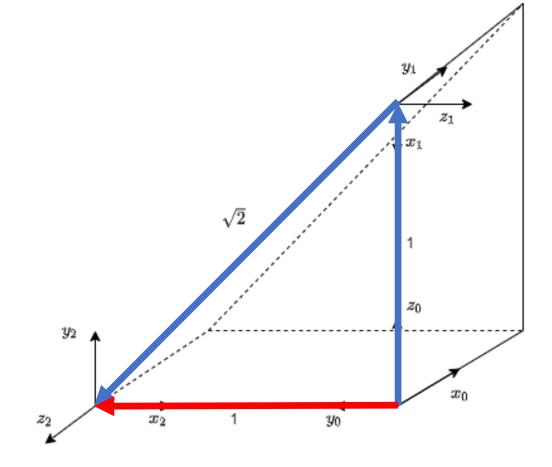


$$H_2^0 = H_1^0 H_2^1 = \begin{bmatrix} R_{x,90} R_{z,270} & t \\ 0 & 1 \end{bmatrix} \begin{bmatrix} R_{z,90} R_{y,-90} & t \\ 0 & 1 \end{bmatrix} = \begin{bmatrix} R_{y,270} R_{x,270} & t \\ 0 & 1 \end{bmatrix}$$

• Try to solve 2.39 by hand. Get an idea how to rotate the coordinate frames using right hand rule.



Find H_1^0, H_2^0, H_3^0 and H_3^2

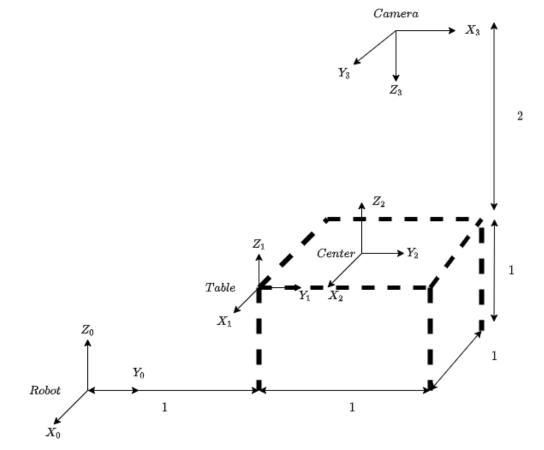


Find H_1^0

$$H = \begin{bmatrix} R & d \\ 0 & 1 \end{bmatrix}, R is rotation matrix (3x3), d is translation vector (1x3)$$

$$R_x(heta) = egin{bmatrix} 1 & 0 & 0 \ 0 & \cos heta & -\sin heta \ 0 & \sin heta & \cos heta \end{bmatrix}$$

$$R_y(heta) = egin{bmatrix} \cos heta & 0 & \sin heta \ 0 & 1 & 0 \ -\sin heta & 0 & \cos heta \end{bmatrix}$$

$$R_z(heta) = egin{bmatrix} \cos heta & -\sin heta & 0 \ \sin heta & \cos heta & 0 \ 0 & 0 & 1 \end{bmatrix}$$

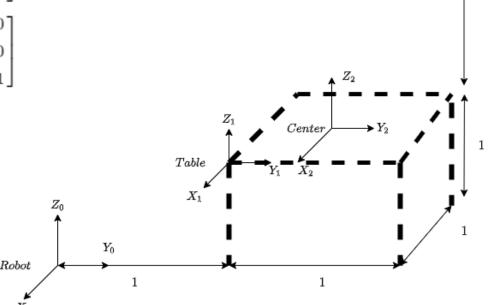

Camera

$$t = [0 \ 1 \ 1]$$


$$R = \begin{array}{cccc} 1 & 0 & 0 \\ 0 & 1 & 0 \\ 0 & 0 & 1 \end{array}$$

$$H_1^0 = \begin{bmatrix} R & d \\ 0 & 1 \end{bmatrix} = \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 1 \\ 0 & 0 & 1 & 1 \\ 0 & 0 & 0 & 1 \end{bmatrix}$$


Find H_2^0

$$T = [Tx Ty Tz] = [-0.5 1.5 1]$$

$$H_2^0 = \begin{bmatrix} R & d \\ 0 & 1 \end{bmatrix} = \begin{bmatrix} 1 & 0 & 0 & -0.5 \\ 0 & 1 & 0 & 1.5 \\ 0 & 0 & 1 & 1 \\ 0 & 0 & 0 & 1 \end{bmatrix}$$

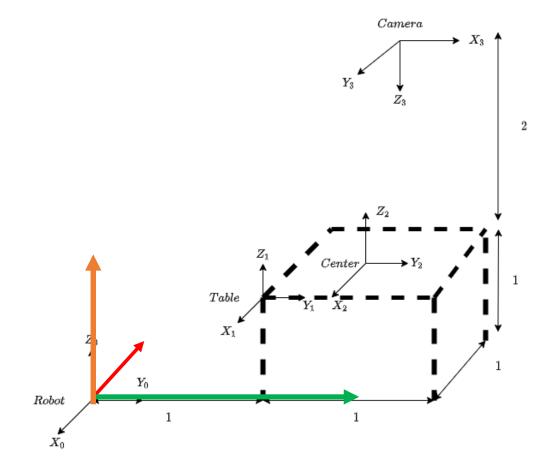

Find H_3^0




$$R = R_{z,90} R_{x,180}$$

$$R_z(heta) = egin{bmatrix} \cos heta & -\sin heta & 0 \ \sin heta & \cos heta & 0 \ 0 & 0 & 1 \end{bmatrix}$$

$$R_x(\theta) = \begin{bmatrix} 1 & 0 & 0 \\ 0 & \cos \theta & -\sin \theta \\ 0 & \sin \theta & \cos \theta \end{bmatrix}$$

$$T = [Tx Ty Tz] = [-0.5 1.5 3.0]$$

$$H_3^0 = \begin{bmatrix} R_{z,90} & R_{x,180} & d \\ 0 & 1 \end{bmatrix} = \begin{bmatrix} 1 & 0 & 0 & -0.5 \\ 0 & 1 & 0 & 1.5 \\ 0 & 0 & 1 & 3.0 \\ 0 & 0 & 0 & 1 \end{bmatrix}$$

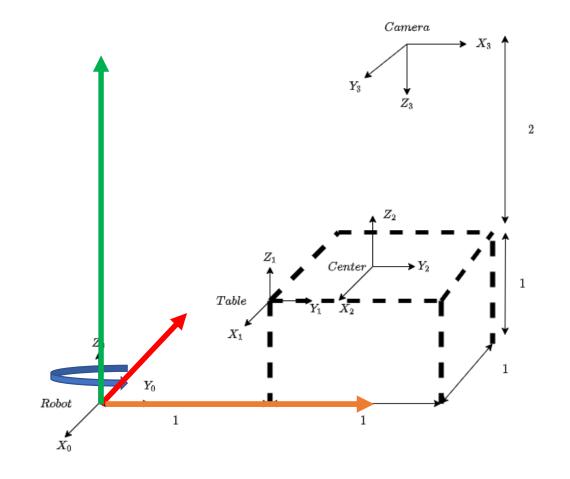


Find H_3^2

$$R = R_{z,90} R_{x,180}$$

$$R_z(\theta) = egin{bmatrix} \cos \theta & -\sin \theta & 0 \ \sin \theta & \cos \theta & 0 \ 0 & 0 & 1 \end{bmatrix} \qquad R_x(\theta) = egin{bmatrix} 1 & 0 & 0 \ 0 & \cos \theta & -\sin \theta \ 0 & \sin \theta & \cos \theta \end{bmatrix}$$

$$T = [0 \ 0 \ 2]$$

$$H_3^2 = \begin{bmatrix} R & d \\ 0 & 1 \end{bmatrix} = \begin{bmatrix} r_{11} & r_{12} & r_{13} & 0 \\ r_{21} & r_{22} & r_{23} & 0 \\ r_{31} & r_{32} & r_{33} & 2 \\ 0 & 0 & 0 & 1 \end{bmatrix}$$

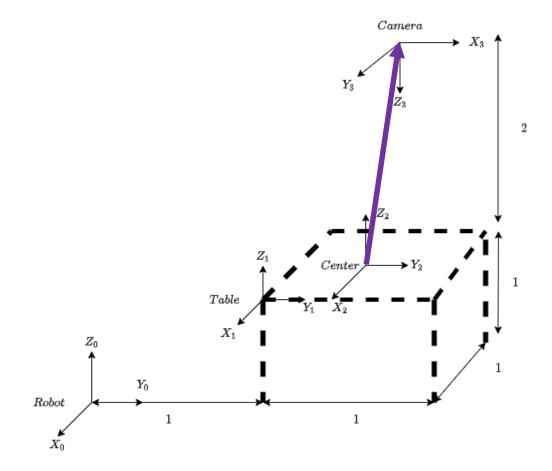

Next week

• Forward kinematics, Denavit Hartenberg