


# Lufkin®

TAPES, RULES AND LEVELS

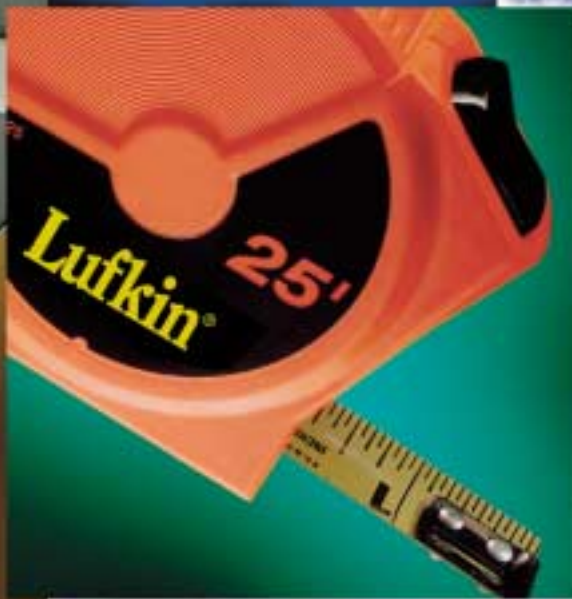

## Lufkin® Table of Contents

<b>Contents</b>	<b>Page No.</b>
EC-Standardization	77
Power Tapes	78-83
Pocket Tapes	84-86
Long Tapes	87-89
Fiberglass Tapes	90
Private Branded Tapes	91
Spirit Levels	92-95
Wooden Folding Rules	96-97
Plastic Folding Rules	97
Lufkin® Numerical Index	227

Each Lufkin measure tape (steel) corresponds to the Class II of the European Weights and Measure Regulations (except CME tapes, HY and HYT-series). Tolerance of dimensional accuracy in mm +/- is for the whole tape length.

Class	1 m	2 m	3 m	5 m	10 m	15 m	20 m	30 m	50 m
I	0,2	0,3	0,4	0,6	1,1	1,6	2,1	3,1	5,1
II	0,5	0,7	0,9	1,3	2,3	3,3	4,3	6,3	10,3
III	1,0	1,4	1,8	2,6	4,6	6,6	8,6	12,6	20,6

The tolerance has been determined at a temperature of 20°C and a power of 50 Newton.

**Class II with Certificate of Standardization**

Each measure tape (except CME tapes, HS, HY and HY-series) is available with an individual Certificate according to Class II at which 5 measuring points are determined. Certificate Class II length ranges from 2 - 8 m, 10 - 20 m and 30 - 50 m.

**Class I with Certificate**

The following types are available (Price includes measure tape incl. Certificate)

Lufkin	Type	Length	Width	Code		
				Dutch	English	German
2000	2003	3 m	16 mm	0068902003	0068902005	0068902004
Ultralok	Y23CM	3 m	13 mm	0068900023	0068900021	0068900020

The tolerances of measure tapes of Class I and Class II are determined by the following formula.

$$(a + b \times L)$$

L = nominal length in meter

	a	b
Class I:	0,1	0,1
Class II:	0,3	0,2

**Example :**  
3 m tapes/EC-Class II:  $(0,3 + 0,2 \times 3) = +/- 0,9$  mm difference

Identification of the measure tapes produced at Lufkin, Holland.



EC-Class of accuracy      Grant No. of model      Imprint for standardization

### Series 2000



- Ergonomic design, rounded case to feel as if it was part of the hand
- High strength case with removable belt clip
- Blade lock placed on top where the thumb expects it to be
- Lock holds blade securely at any length
- Unbreakable end hook and bright, clean graphics
- Built-in shock absorber cushions blade return

Type	Code No.	Packed	Blade Size		Weight g	Shelf Pack	Replacement Blade Type	Code No.	Shelf Pack
			Width	Length					
2002	0069200204	Carded	16 mm	2 m	114	6	R2002	0069221701	6
2002	0069200254	Boxed	16 mm	2 m	100	50	R2002	0069221701	6
2006	0069200611	Carded	16 mm <sup>5/8</sup> "	2 m/6'	114	6	R2006	0069221702	6
2003	0069200304	Carded	16 mm	3 m	135	6	R2003	0069221704	6
2003	0069200354	Boxed	16 mm	3 m	123	50	R2003	0069221704	6
2010	0069201011	Carded	16 mm <sup>5/8</sup> "	3 m/10'	135	6	R2010	0069221705	6
2003(GB)	0069810113	Carded	16 mm <sup>5/8</sup> "	3 m/10'	135	6	R2010	0069221705	6
2105	0069210504	Carded	16 mm	5 m	191	6	R2105	0069221707	6
2105	0069210554	Boxed	16 mm	5 m	186	50	R2105	0069221707	6
2116	0069211611	Carded	16 mm <sup>5/8</sup> "	5 m/16'	195	6	R2116	0069221708	6
2205	0069220504	Carded	19 mm	5 m	230	6	RY35CM	0063803504	6
2205	0069220554	Boxed	19 mm	5 m	216	50	RY35CM	0063803504	6
2216	0069221611	Carded	19 mm <sup>3/4</sup> "	5 m/16'	240	6	RY35CME	0063803511	6
2005(GB)	0069810114	Carded	19 mm <sup>3/4</sup> "	5 m/16'	240	6	RY35CME	0063803511	6
2208	0069220804	Carded	25 mm	8 m	439	6	RY48CM	0063804804	6
2226	0069222611	Carded	25 mm/1"	8 m/26'	460	6	RY48CME	0063804811	6
2008(GB)	0069232611	Carded	25 mm/1"	8 m/26'	460	6	RY48CME	0063804811	6
2410	2410CME	Carded	25 mm/1"	10 m/33'	1181	6	RXL410CME	RXL410CME	6

- Chrome-plated lightweight high strength case
- Blade lock holds blade at any length
- Powered blade return
- Built-in shock absorber cushions blade return
- Removable belt clip



Type	Code No.	Packed	Blade Size		Weight g	Shelf Pack	Replacement Blade Type	Code No.	Shelf Pack
			Width	Length					
Y23CM	0060402304	Carded	13 mm	3 m	110	6	RY23CM	0063802304	6
Y23CM	0060402354	Boxed	13 mm	3 m	105	50	RY23CM	0063802304	6
Y23CME	0060402311	Carded	13 mm <sup>1/2"</sup>	3 m/10'	110	6	RY23CME	0063802311	6
Y25CM	0060402504	Carded	13 mm	5 m	160	6	RY25CM	0063802504	6
Y25CM	0060402554	Boxed	13 mm	5 m	155	50	RY25CM	0063802504	6
Y25CME	0060402511	Carded	13 mm <sup>1/2"</sup>	5 m/16'	160	6	RY25CME	0063802511	6
Y35CM	0060403504	Carded	19 mm	5 m	205	6	RY35CM	0063803504	6
Y35CM	0060403554	Boxed	19 mm	5 m	200	50	RY35CM	0063803504	6
Y35CME	0060403511	Carded	19 mm <sup>3/4"</sup>	5 m/16'	205	6	RY35CME	0063803511	6
Y38CM	0060403804	Carded	19 mm	8 m	335	6	RY38CM	0063803804	6
Y38CM	0060403834	Boxed	19 mm	8 m	320	30	RY38CM	0063803804	6
Y38CME	0060403811	Carded	19 mm <sup>3/4"</sup>	8 m/26'	335	6	RY38CME	0063803811	6

### Unilok



- Black high strength case
- Blade lock holds blade at any length
- Powered blade return
- Built-in shock absorber cushions blade return
- Removable belt clip

Type	Code No.	Packed	Blade Size		Weight g	Shelf Pack	Replacement Blade Type	Code No.	Shelf Pack
			Width	Length					
YU822CM	0061082204	Carded	13 mm	2 m	86	6	RY22CM	0063802204	6
YU822CM	0061082254	Boxed	13 mm	2 m	82	50	RY22CM	0063802204	6
YU822CME	0061082211	Carded	13 mm <sup>1/2</sup> "	2 m/6'	86	6	RY22CME	0063802211	6
YU823CM	0061082304	Carded	13 mm	3 m	110	6	RY23CM	0063802304	6
YU823CM	0061082354	Boxed	13 mm	3 m	100	50	RY23CM	0063802304	6
YU823CME	0061082311	Carded	13 mm <sup>1/2</sup> "	3 m/10'	110	6	RY23CME	0063802311	6
YU835CM	0061083504	Carded	19 mm	5 m	202	6	RY35CM	0063803504	6
YU835CM	0061083554	Boxed	19 mm	5 m	199	50	RY35CM	0063803504	6
YU835CME	0061083511	Carded	19 mm <sup>3/4</sup> "	5 m/16'	202	6	RY35CME	0063803511	6
YU838CM	0061083804	Carded	19 mm	8 m	323	6	RY38CM	0063803804	6
YU838CME	0061083811	Carded	19 mm <sup>3/4</sup> "	8 m/26'	323	6	RY38CME	0063803811	6



- Good value at a low price
- Durable ABS case, contour shape fits comfortably in hand
- HiViz® colour makes it easy to find
- Unique slide lock for easy control
- Triple-riveted (5 m and 8 m) respectively double-riveted (3 m)
- Reinforced end-hook
- Belt clip
- Carded, blister packed



Type	Code No.	Packed	Blade Size		Weight g	Shelf Pack	Replacement Blade Type	Code No.	Shelf Pack
			Width	Length					
L503CM	L503CM	Carded	13 mm	3 m	107	6	-	-	-
L510CME	L510CME	Carded	13 mm/ <sup>1</sup> / <sub>2</sub> "	3 m/10'	107	6	-	-	-
L505CM	L505CM	Carded	19 mm	5 m	209	6	-	-	-
L516CME	L516CME	Carded	19 mm/ <sup>3</sup> / <sub>4</sub> "	5 m/16'	209	6	-	-	-
L508CM	L508CM	Carded	25 mm	8 m	403	6	-	-	-
L525CME	L525CME	Carded	25 mm/1"	8 m/26'	403	6	-	-	-

Metric version with verification mark (L...CMV) available on request.

### Series 1000

- Attractive power tapes in high visibility colours orange, yellow and red
- High strength case
- Blade lock holds blade at any length
- Powered blade return
- Built-in shock absorber cushions blade return
- Removable belt clip



HVY....= yellow



HVO....= orange



HVR....= red

Type	Code No.	Packed	Blade Size		Weight g	Shelf Pack	Replacement Blade Type	Code No.	Shelf Pack
			Width	Length					
HVO1002	0069100205	Carded	16 mm	2 m	125	6	R2002	0069221701	6
HVY1002	0069100207	Carded	16 mm	2 m	125	6	R2002	0069221701	6
HVR1002	0069100208	Carded	16 mm	2 m	125	6	R2002	0069221701	6
HVO1003	0069100305	Carded	16 mm	3 m	145	6	R2003	0069221704	6
HVY1003	0069100307	Carded	16 mm	3 m	145	6	R2003	0069221704	6
HVR1003	0069100308	Carded	16 mm	3 m	145	6	R2003	0069221704	6
HVO1205	0069120505	Carded	19 mm	5 m	238	6	RY35CM	0063803504	6
HVY1205	0069120507	Carded	19 mm	5 m	238	6	RY35CM	0063803504	6
HVR1205	0069120508	Carded	19 mm	5 m	238	6	RY35CM	0063803504	6
HVO1208	0069120805	Carded	25 mm	8 m	435	6	RY48CM	0063804804	6
HVY1208	0069120807	Carded	25 mm	8 m	435	6	RY48CM	0063804804	6
HVR1208	0069120808	Carded	25 mm	8 m	435	6	RY48CM	0063804804	6



## Series 1000 with Metric/English graduations (CME)

Case colour "Black"

Type	Code No.	Packed	Blade Size		Weight g	Shelf Pack	Replacement Blade Type	Code No.	Shelf Pack
			Width	Length					
1023CME	0069810230	Carded	13 mm/ $1/2$ "	3 m/10'	125	6	RY23CME	0063802311	6
1035CME	0069810350	Carded	19 mm/ $3/4$ "	5 m/16'	212	6	RY35CME	0063803511	6
1038CME	0069810380	Carded	19 mm/ $3/4$ "	8 m/26'	325	6	RY38CME	0063803811	6
1048CME	0069810480	Carded	25 mm/1"	8 m/26'	417	6	RY48CME	0063804811	6

## Series 1000 with Metric/English graduations (CME)

Case colour "Orange"

Type	Code No.	Packed	Blade Size		Weight g	Shelf Pack	Replacement Blade Type	Code No.	Shelf Pack
			Width	Length					
HV1035CME	0069810340	Carded	19 mm/ $3/4$ "	5 m/16'	210	6	RY35CME	0063803511	6
HV1048CME	0069104811	Carded	25 mm/1"	8 m/26"	425	6	RY48CME	0063804811	6

## Focus

- Ergonomic high strength case, high visibility colour orange
- New type of scale marking can be read from both the left and the right
- Blade lock holds blade at any length
- Powered blade return
- Built-in shock absorber cushions blade return
- New developed "Quad" hook (on 1"/25mm tape only) ensures long life
- Removable belt clip



Type	Code No.	Packed	Blade Size		Weight g	Shelf Pack	Replacement Blade Type	Code No.	Shelf Pack
			Width	Length					
W35CM	0069103504	Carded	19 mm	5 m	240	6	-	-	-
W48CM	0069104804	Carded	25 mm	8 m	420	6	-	-	-

### Universal



- Small and compact
- Blade lock holds blade at any length
- Powered blade return
- High strength case
- Carded versions with removable belt clip

Type	Code No.	Packed	Blade Size		Weight g	Shelf Pack	Replacement Blade Type	Code No.	Shelf Pack
			Width	Length					
Y822CM	0061182204	Carded	13 mm	2 m	66	6	RY22CM	0063802204	6
Y822CM	0061182254	Boxed	13 mm	2 m	64	50	RY22CM	0063802204	6
Y822CME	0061182211	Carded	13 mm/1/2"	2 m/6'	66	6	RY22CME	0063802211	6
Y823CM	0061182304	Carded	13 mm	3 m	92	6	RY23CM	0063802304	6
Y823CM	0061182354	Boxed	13 mm	3 m	88	50	RY23CM	0063802304	6
Y823CME	0061182311	Carded	13 mm/1/2"	3 m/10'	92	6	RY23CME	0063802311	6

### Mezurall in Metal Case



- Attractive, rugged zinc alloy case
- Ideal for industrial use
- Power retraction operation

Type	Code No.	Packed	Blade Size		Weight g	Shelf Pack	Replacement Blade Type	Code No.	Shelf Pack
			Width	Length					
Y422CM	0060842204	Carded	13 mm	2 m	120	6	RY22CM	0063802204	6
Y422CM	0060842254	Boxed	13 mm	2 m	116	50	RY22CM	0063802204	6
Y422CME	0060842211	Carded	13 mm/1/2"	2 m/6'	120	6	RY22CME	0063802211	6
Y423CM	0060842304	Carded	13 mm	3 m	140	6	RY23CM	0063802304	6
Y423CM	0060842354	Boxed	13 mm	3 m	136	50	RY23CM	0063802304	6
Y423CME	0060842311	Carded	13 mm/1/2"	3 m/10'	140	6	RY23CME	0063802311	6

## Mezurall in Chrome Plated Plastic Case

- Chrome plated high strength plastic case
- Power retraction operation
- Belt clip



Type	Code No.	Packed	Blade Size		Weight g	Shelf Pack	Replacement Blade Type	Code No.	Shelf Pack
			Width	Length					
W9312D	W9312D	Carded	3/4"	12' Engineer's	167	6	-	-	-

## Key Ring Tapes

- Case in high visibility colour yellow
- Blade is not replaceable
- Spring action returns blade to case



Type	Code No.	Packed	Blade Size		Weight g	Shelf Pack	Replacement Blade Type	Code No.	Shelf Pack
			Width	Length					
KRY611CM	0069800214	Boxed	6 mm	1 m	20	6	-	-	-

### Pee Wee



- Pocket size ideal for office and home
- High strength case in black
- Power retraction operation
- Blade is not replaceable

Type	Code No.	Packed	Blade Size		Weight g	Shelf Pack	Replacement Blade Type	Code No.	Shelf Pack
			Width	Length					
Y612CM	0061561204	Carded	6 mm	2 m	35	6	-	-	-
Y612CM	0061561254	Boxed	6 mm	2 m	30	50	-	-	-
Y612CME	0061561211	Carded	6 mm/1/4"	2 m/6'	35	6	-	-	-
Y613CM	0061561304	Carded	6 mm	3 m	45	6	-	-	-
Y613CM	0061561354	Boxed	6 mm	3 m	40	50	-	-	-
Y613CME	0061561311	Carded	6 mm/1/4"	3 m/10'	45	6	-	-	-

### Executive® Diameter



- Designed for measuring diameters of pipe, cable, tire or any circular object
- Polished chrome case
- Zero falls in the same place on each side of the blade
- Model W606PD shows diameter inches to 100ths, W606PM to millimetres
- Yellow clad tape
- Easy-to-read bold graduations on yellow background
- Spring action returns blade to case

Type	Code No.	Packed	Blade Size		Weight g	Shelf Pack	Replacement Blade Type	Code No.	Shelf Pack
			Width	Length					
W606PD	W606PD	Boxed	1/4"	6'	38	6	RW06PD	RW06PD	6
W606PM	W606PM	Boxed	6 mm	2 m	38	6	RW06PM	RW06PM	6

- Traditional design
- Professional tradesmans' quality
- Rugged, vinyl-covered steel case
- Large easy action winding drum and friction washers
- Nylon rollers guide the tape smoothly in and out of case
- "YB" prefix denotes product blade is fitted with a ring, zero point 10 cm behind ring
- "HY" prefix denotes product blade is fitted with a hook ring, zero point at inner side of hook ring



Type	Code No.	Packed	Blade Size		Weight g	Shelf Pack	Replacement Blade Type	Code No.	Shelf Pack
			Width	Length					
YB210CM	0061821004	Carded	10 mm	10 m	357	1	RYB210CM	0064021004	1
YB220CM	0061822004	Carded	10 mm	20 m	602	1	RYB220CM	0064022004	1
YB230CM	0061823004	Carded	10 mm	30 m	762	1	RYB230CM	0064023004	1
YB250CM	0061825004	Carded	10 mm	50 m	1136	1	RYB250CM	0064025004	1
HY210CM	0061921031	Carded	10 mm	10 m	362	1	RHY210CM	0064221031	1
HY220CM	0061922031	Carded	10 mm	20 m	606	1	RHY220CM	0064222031	1
HY230CM	0061923031	Carded	10 mm	30 m	740	1	RHY230CM	0064223031	1
HY250CM	0061925031	Carded	10 mm	50 m	1134	1	RHY250CM	0064225031	1
YB210CME	0061821015	Carded	10 mm <sup>3/8"</sup>	10 m/33'	370	1	RYB210CME	0064021015	1
YB220CME	0061822015	Carded	10 mm <sup>3/8"</sup>	20 m/66'	621	1	RYB220CME	0064022015	1
YB230CME	0061823015	Carded	10 mm <sup>3/8"</sup>	30 m/100'	780	1	RYB230CME	0064023015	1
YB250CME	0061825015	Carded	10 mm <sup>3/8"</sup>	50 m/150'	1165	1	RYB250CME	0064025015	1
HY210CME	0061921041	Carded	10 mm <sup>3/8"</sup>	10 m/33'	367	1	RHY210CME	0064221041	1
HY220CME	0061922041	Carded	10 mm <sup>3/8"</sup>	20 m/66'	616	1	RHY220CME	0064222041	1
HY230CME	0061923041	Carded	10 mm <sup>3/8"</sup>	30 m/100'	776	1	RHY230CME	0064223041	1
HY250CME	0061925041	Carded	10 mm <sup>3/8"</sup>	50 m/150'	1165	1	RHY250CME	0064225041	1

Special



- Lightweight, high impact case
- Smooth wind-in mechanism
- Winding arm folds flat, contoured mouth stores blade end hook
- Pocket shaped
- “SB” prefix denotes product blade is fitted with a ring, zero point 10 cm behind ring
- “HS” prefix denotes product blade is fitted with a hook ring, zero point at inner side of hook ring

Type	Code No.	Packed	Blade Size		Weight g	Shelf Pack	Replacement Blade Type	Code No.	Shelf Pack
			Width	Length					
SB10CM	0062501004	Carded	10 mm	10 m	204	6	RSB10CM	0064101004	6
SB15CM	0062501504	Carded	10 mm	15 m	252	6	RSB15CM	0064101504	6
SB20CM	0062502004	Carded	10 mm	20 m	294	6	RSB20CM	0064102004	6
SB30CM	0062503004	Carded	10 mm	30 m	420	6	RSB30CM	0064103004	6
HS10CM	0062601001	Carded	10 mm	10 m	205	6	RHS10CM	0064301001	6
HS10CM	0062601031	Boxed	10 mm	10 m	195	30	RHS10CM	0064301001	6
HS15CM	0062601501	Carded	10 mm	15 m	256	6	RHS15CM	0064301501	6
HS20CM	0062602001	Carded	10 mm	20 m	298	6	RHS20CM	0064302001	6
HS20CM	0062602031	Boxed	10 mm	20 m	285	30	RHS20CM	0064302001	6
HS30CM	0062603001	Carded	10 mm	30 m	414	6	RHS30CM	0064303001	6
HS30CM	0062603031	Boxed	10 mm	30 m	400	30	RHS30CM	0064303001	6
HS10CME	0062601011	Carded	10 mm <sup>3/8</sup> "	10 m/33'	200	6	RHS10CME	0064301011	6
HS15CME	0062601511	Carded	10 mm <sup>3/8</sup> "	15 m/50'	252	6	RHS15CME	0064301511	6
HS20CME	0062602011	Carded	10 mm <sup>3/8</sup> "	20 m/66'	302	6	RHS20CME	0064302011	6
HS30CME	0062603011	Carded	10 mm <sup>3/8</sup> "	30 m/100'	426	6	RHS30CME	0064303011	6

50 Footer



- Durable ABS case in Hi-Viz® orange is easy to find on the job site
- Shock-resistant case with anti-slip covering
- Virtually unbreakable Quad Hook, four rivets for extra strength
- Lufkin roll technology permits integration of long tapes into pocket tape measures
- Smooth running tape return
- Ergonomically shaped
- Removable belt clip
- Blade of EL15CMR is fitted with hook and ring

Type	Code No.	Packed	Blade Size		Weight g	Shelf Pack	Replacement Blade Type	Code No.	Shelf Pack
			Width	Length					
EL15CMR	0061815014	Carded	25 mm	15 m	480	6	-	-	-
EL15CME	EL15CME	Carded	25 mm/1"	15 m/50'	460	6	-	-	-

## Frame Tapes

- Robust frame made on high quality steel
- Components made on nylon ensures regular and trouble-free function
- Handy grip
- Blade is fitted with ring, zero point 10 cm behind ring



Type	Code No.	Packed	Blade Size		Weight g	Shelf Pack	Replacement Blade Type	Code No.	Shelf Pack
			Width	Length					
FYB320CM	0062832004	Carded	13 mm	20 m	952	1	RYB320CM	0064032004	1
FYB330CM	0062833004	Carded	13 mm	30 m	1144	1	RYB330CM	0064033004	1
FYB350CM	0062835004	Carded	13 mm	50 m	1530	1	RYB350CM	0064035004	1

## Hi-Viz® Linear Reel



- Lightweight open reel is easy to handle and rewind
- Line does not collect dirt in case
- Hi-Viz® orange case

Code No.	Packed	Blade Size		Weight g	Shelf Pack	Replacement Blade
		Width	Length			
HY1730CME	Carded	1/2" (13 mm)	100' (30 m)	540	1	-

## Hi-Viz® Linear Reel



- Lightweight open reel is easy to handle and rewind
- Line does not collect dirt in case
- Hi-Viz® orange case

Code No.	Packed	Blade Size		Weight g	Shelf Pack	Replacement Blade
		Width	Length			
HY1750CME	Carded	1/2" (13 mm)	164' (50 m)	790	2	-

## Hi-Viz® Linear Reel



- Sturdy open case
- Long handle for fast and effortless rewinding
- Hi-Viz® orange case

Code No.	Packed	Blade Size		Weight g	Shelf Pack	Replacement Blade
		Width	Length			
HY17100CME	Carded	1/2" (13 mm)	328' (100 m)	1520	2	-




Premiums

Lufkin specialties have never looked this good. New designs and HI-VIZ colours make the world's best quality tape the first choice of your customers when they want to display a little quality and colour of their own. The Lufkin reputation for quality imprinting and reliable delivery made these the most sought after products around. Check out the full line and call your CooperTools representative today. All measuring tapes described on pages 78-88 are also available as premiums. Please ask for our catalogue.



# Spirit Levels




**Always reliable - perfect use**

The barrel-shaped bubble tubes are made of impact resistant Plexiglas and leak resistant. They are permanently fitted, adjusted in accordance with standards and selected via video controlling. The alignment of the bubble tubes cannot be changed later by the user.


## 1. Spirit Level Bodies

The hammers indicate the amount of loading that can be applied to the body of the spirit level.

3 Hammers = high loading



2 Hammers = medium loading





1 Hammer = moderate loading




## 2. Precision

The precision is given for normal and vertical measurements.






## 3. Length

The length of the spirit level is given in cm and inches.




## 4. Measuring Surface

Milled measuring surfaces make it possible to lay the spirit level flat. This is all the more important, the smaller the spirit level.

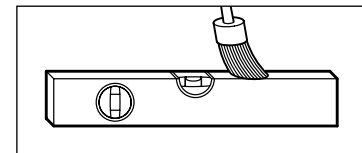

## 5. Magnet

Spirit level with magnet in the measuring surface. Offers good adhesion.




## L 10

- Accuracy: In normal position  $0,057^\circ = 1,0 \text{ mm/m}$
- Light metal extruded box-section with smooth faces
- Electrostatic powder coating



$0,057^\circ = 1,0 \text{ mm/m}$




Type	Code No.	Length cm
L 10-30	0069900200	30
L 10-40	0069900201	40
L 10-50	0069900202	50
L 10-60	0069900203	60
L 10-80	0069900204	80
L 10-90	0069900205	90
L 10-100	0069900206	100
L 10-120	0069900207	120
L 10-150	0069900208	150
L 10-180	0069900209	180
L 10-200	0069900210	200

## L 10A

- Accuracy: In normal position  $0,057^\circ = 1,0 \text{ mm/m}$
- Tolerance of the angle measuring device:  $\pm 0,3^\circ$
- L 10A as Type L 10, but with angle measuring device



$0,057^\circ = 1,0 \text{ mm/m}$




Type	Code No.	Length cm
L 10A-40	0069900212	40
L 10A-60	0069900214	60
L 10A-80	0069900215	80
L 10A-100	0069900217	100
L 10A-120	0069900218	120
L 10A-180	0069900220	80


### L 50V



- 1 Milled working face (up to length 120 cm)
- Accuracy:
  - In normal position  $0,029^\circ = 0,5 \text{ mm/m}$
  - Vial-down position  $0,043^\circ = 0,75 \text{ mm/m}$
- Very strong light metal extruded box section with smooth faces
- Electrostatic powder coating
- With 2 vertical vials




$0,029^\circ = 0,5 \text{ mm/m}$



$0,043^\circ = 0,75 \text{ mm/m}$



$\leq = 120 \text{ cm}$



$\geq = 150 \text{ cm}$



Type	Code No.	Length cm
L 50V-40	0069900256	40
L 50V-50	0069900323	50
L 50V-60	0069900257	60
L 50V-80	0069900258	80
L 50V-90	0069900368	90
L 50V-100	0069900259	100
L 50V-120	0069900260	120
L 50V-150	0069900261	150
L 50V-180	0069900262	180
L 50V-200	0069900263	200


### L 50MA




- 1 Milled working face
- Accuracy:
  - In normal position  $0,029^\circ = 0,5 \text{ mm/m}$
  - Vial-down position  $0,043^\circ = 0,75 \text{ mm/m}$
- Tolerance of the angle measuring device:  $\pm 0,3^\circ$
- With strong magnets and angle measuring device



$0,029^\circ = 0,5 \text{ mm/m}$



$0,043^\circ = 0,75 \text{ mm/m}$



Type	Code No.	Length cm
L 50MA-40	0069900328	40
L 50MA-60	0069900329	60

- 1 Milled working face
- Accuracy:  
In normal position  $0,029^\circ = 0,5 \text{ mm/m}$   
Vial-down position  $0,043^\circ = 0,75 \text{ mm/m}$
- Pressure die-cast light metal alloy. Electrostatic powder coating. Measuring face at the ends protected by slightly overlapping body. The design is highly shock absorbent.




Type	Code No.	Length cm
L 90-40	0069900280	40
L 90-50	0069900281	50
L 90-60	0069900282	60
L 90-80	0069900283	80

## Series R 10 - Wooden folding rules

Our top quality series. Concealed rivets, joint plates embedded in wood to make folds lie closely together. Steel springs between joint plates. Highly resistant to abrasion and humidity. Black figures, EC-pattern approval, accuracy class III, red coloured ends.

### R 11




Graduation in cm and mm on both edges

Type	Code No.	Blade Size		Folds	Colour
		width mm	length m		
R 11	0067000001	16	2	10	white/yellow

## Series R 30 - Wooden folding rules

Well suited for publicity imprints.

### R 31




Graduation in cm and mm on both edges

Type	Code No.	Blade Size		Folds	Colour
		width mm	length m		
R 31	0067000011	16	2	10	white/yellow

## Series R 40 - Wooden folding rules

### R 41




Graduation in cm and mm on both edges

Type	Code No.	Blade Size		Folds	Colour
		width mm	length m		
R 41	0067000017	16	2	10	white/yellow

## Serie R 50 - Wooden folding rules

### R 51




Graduation in cm and mm on both edges

Type	Code No.	Blade Size		Folds	Colour
		width mm	length m		
R 51	0067000019	16	2	10	yellow

## Serie R 60 - Plastic folding rules

### R 61



Graduation in cm and mm on both edges

Type	Code No.	Blade Size		Folds	Colour
		width mm	length m		
R 61	0067000023	16	2	10	white

## Serie R 70 - Plastic folding rules

### R 71



Graduation in cm and mm on both edges

Type	Code No.	Blade Size		Folds	Colour
		width mm	length m		
R 71	0067000025	13	1	10	white

